


Engineering data		Mechanical data	
Ratio	100	Radial force for 20'000h	5200 N*
Number of stages	2	Radial force for 30'000h	4600 N*
Rated output torque	178 Nm	Max. radial force	8400 N*
Cycling output torque	210 Nm	Axial force for 20'000h	7000 N
Max output torque	335 Nm	Axial force for 30'000h	6000 N
Emergency output torque	420 Nm	Max. axial force	11000 N
Rated input speed	3000 rpm	Protection	IP54
Max input speed	5500 rpm	Input inertia	4.76 kgcm ²
Efficiency	88 %*	Mass	22.14 kg
Operating temperature	<-25; 90> °C	Tilting moment for 20'000h	497 Nm
Backlash	< 9 arcmin	Tilting moment for 30'000h	440 Nm
Service life	20000 h	Max. bending moment	180 Nm
Running noise	70 dB(A)	Output shaft design	Shaft key
Torsional stiffness	73.00 Nm/arcmin		

* at rated speed & torque

* Defined for point of action at ½ output shaft length

Lubrication		Supported motors	
Type	Standard	Motor types	TGN6, TGT6
Lubricant	Grease (lifetime lubrication)	Clamping diameter	35 mm
Customs info		Input flange	Motor adaptation - one part
HS Code	84834090	Installation position	Any

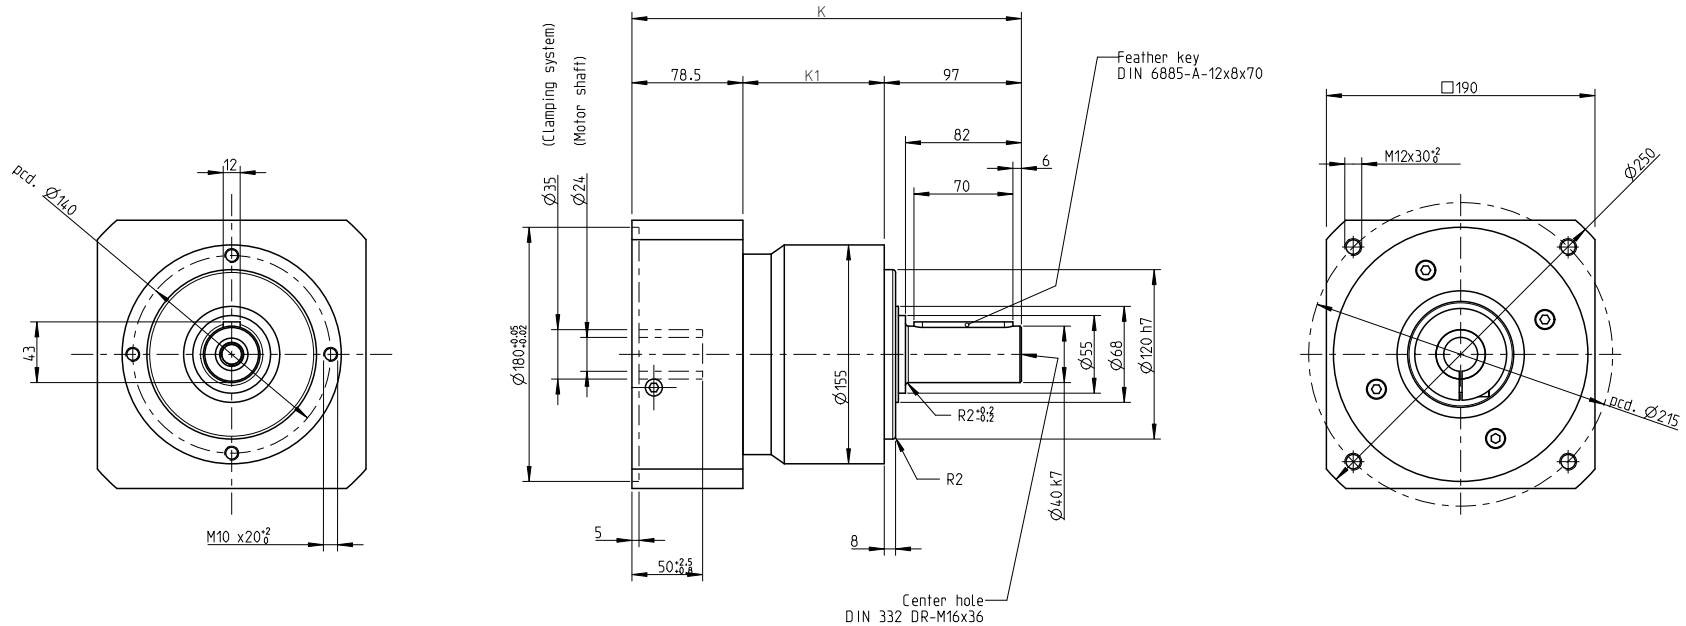

NO OF STAGES	K	K1
I. stage	275,5	100
II. stage	320	144,5

INDEX	ZMĚNA	DATUM	PODPIS		
ZM.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
ROZM. ZAŘ.				ČSN	TRČ.
VYPR.	NORM. REF.			POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.	SCHVÁLIL.	12.9.2020		STARÝ V.	Č.V.
NÁZEV					
Gearbox SG155				TGN6, TGT6	
				Listů	List