


Engineering data		Mechanical data	
Ratio	100	Radial force for 20'000h	2150 N
Number of stages	2	Radial force for 30'000h	1900 N
Rated output torque	13.5 Nm	Max. radial force	2150 N
Cycling output torque	27 Nm	Axial force for 20'000h	4300 N
Max output torque	43 Nm	Axial force for 30'000h	3800 N
Emergency output torque	50 Nm	Max. axial force	4300 N
Rated input speed	4500 rpm	Protection	IP65
Max input speed	14000 rpm	Input inertia	0.21 kgcm ²
Efficiency	68 %*	Mass	1.89 kg
Operating temperature	<-25; 90> °C	Tilting moment for 20'000h	132 Nm
Backlash	< 5 arcmin	Tilting moment for 30'000h	117 Nm
Service life	20000 h	Max. bending moment	18 Nm
Running noise	60 dB(A)	Output shaft design	Flange
Torsional stiffness	13.60 Nm/arcmin		

* at rated speed & torque

Lubrication		Supported motors	
Type	Standard	Motor types	TGN3, TGT3, TGH3
Lubricant	Castrol Optigear Synthetic 800/150	Clamping diameter	14 mm
		Input flange	Motor adaptation - 2 part, round universal flange
Customs info		Installation position	Any
HS Code	84834090		

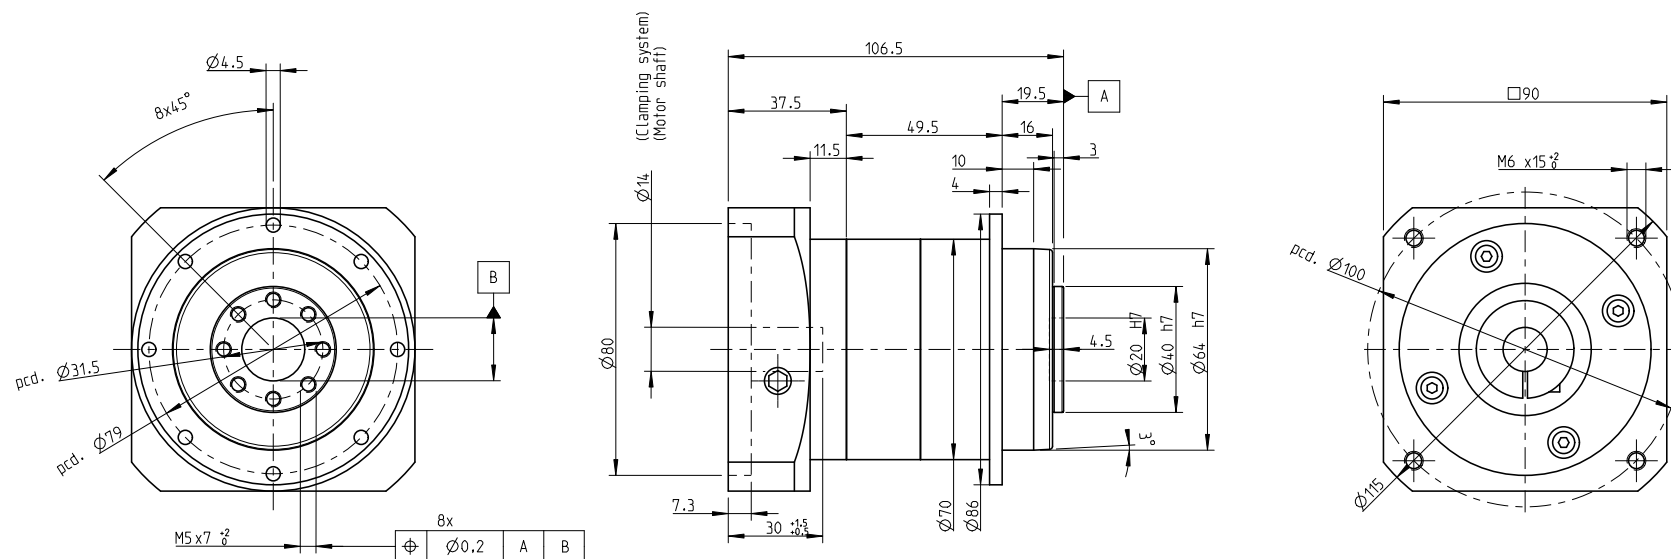

INDEX	ZMĚNA	DATUM	PODPIS		
ZM.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.				ČSN	TR.Č.
ROZM. ZAR.				POZN.	Č. KUSOVNÍKU
VYPR.	NORM. REF.			STARÝ V.	Č.V.
PŘEKR.					
TECHNOL.	SCHVÁLIL.	12.9.2020			
NÁZEV	Gearbox SGFN064			TGN3, TGH3, TGT3	
				Listů	List