| Engineering data | | |
|---|---|---|
| Ratio | 40 | |
| Number of stages | 2 | |
| Rated output torque | 375 | Nm |
| Cycling output torque | 750 | Nm |
| Max output torque | 1200 | Nm |
| Emergency output torque | 1500 | Nm |
| Rated input speed | 3500 | rpm |
| Max input speed | 8500 | rpm |
| Efficiency* | 95 | % |
| Operating temperature | <-25; 90> | °C |
| Backlash | < 5 | arcmin |
| Service life | 20000 | h |
| Running noise | 70 | dB(A) |
| Torsional stiffness | 223.00 | Nm/arcmin |


** at rated speed & torque*

| Lubrication | |
|---|---|
| Type | Standard |
| Lubricant | Castrol Optigear Synthetic 800/150 |

| Customs info | |
|---|---|
| HS Code | 84834090 |

| Mechanical data | | |
|---|---|---|
| Radial force for 20'000h | 12000 | N |
| Radial force for 30'000h | 11000 | N |
| Max. radial force | 12000 | N |
| Axial force for 20'000h | 8500 | N |
| Axial force for 30'000h | 7500 | N |
| Max. axial force | 8500 | N |
| Protection | IP65 | |
| Input inertia | 1.99 | kgcm2 |
| Mass | 14.88 | kg |
| Tilting moment for 20'000h | 1219 | Nm |
| Tilting moment for 30'000h | 1117 | Nm |
| Max. bending moment | 80 | Nm |
| Output shaft design | Flange | |

| Supported motors | |
|---|---|
| Motor types | TGN5, TGT5, TGH5 |
| Clamping diameter | 24 mm |
| Input flange | Motor adaptation - 2 part, round universal flange |
| Installation position | Any |

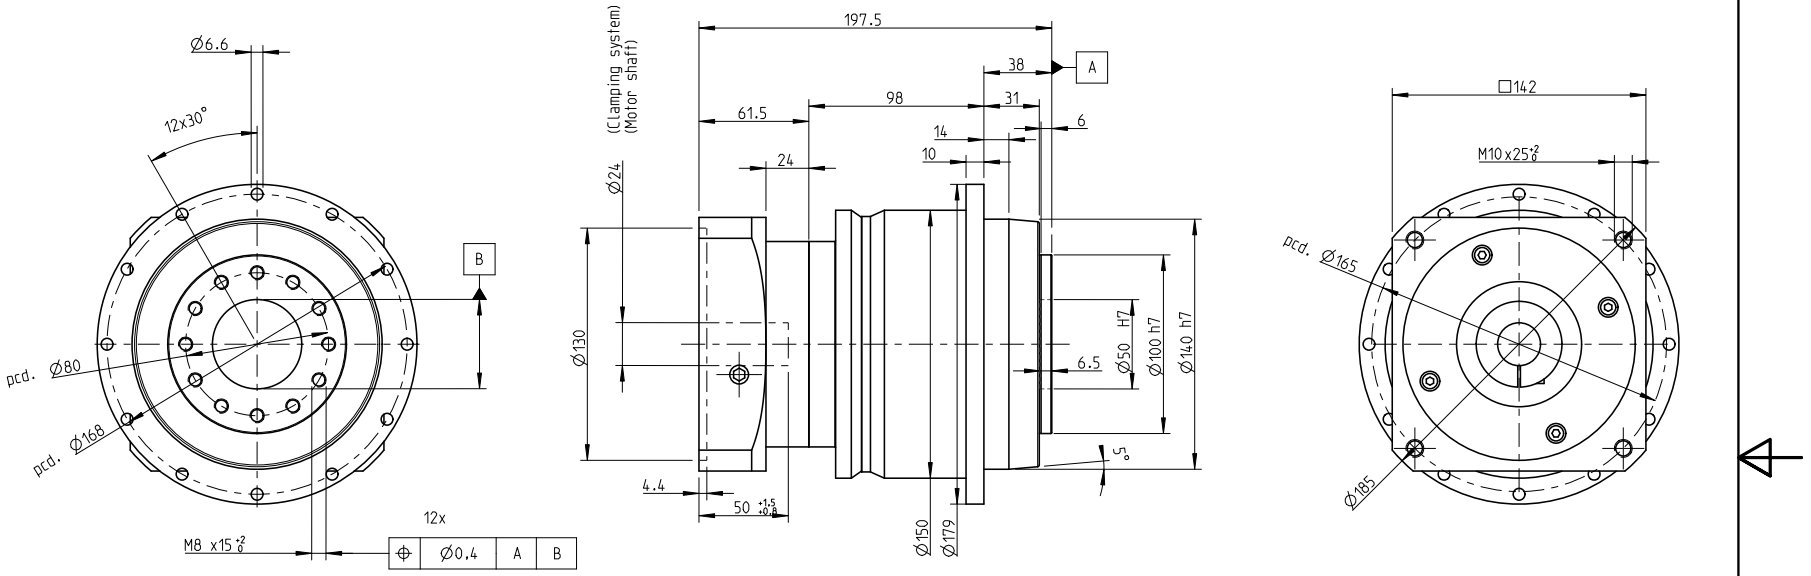


| INDEX | ZMĚNA | DATUM | PODPIS | |
|---|---|---|---|---|
| | | | | |

| | | | | |
|---|---|---|---|---|
| ZM.MAT. | | T.O. | HMOTNOST kg | MĚŘ. |
| ROZM.-POLOT. | | | | |
| ROZM. ZAŘ. | | | ČSN | TŘ.Č. |
| VYPR. | NORM. REF. | | POZN. | Č. KUSOVNÍKU |
| PŘEKR. | | | | |
| TECHNOL. | SCHVÁLIL. | 12.9.2020 | STARÝ V. | Č.V. |

NÁZEV

Gearbox SGFN140

TGN5, TGH5, TGT5

Listů List