
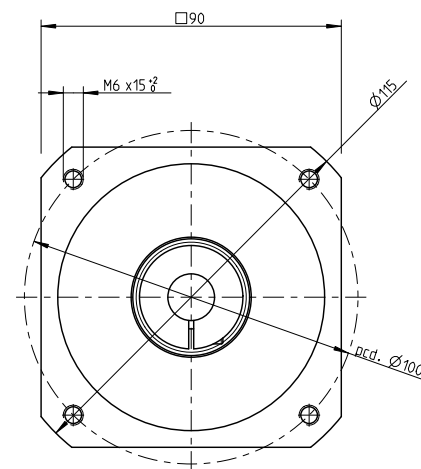
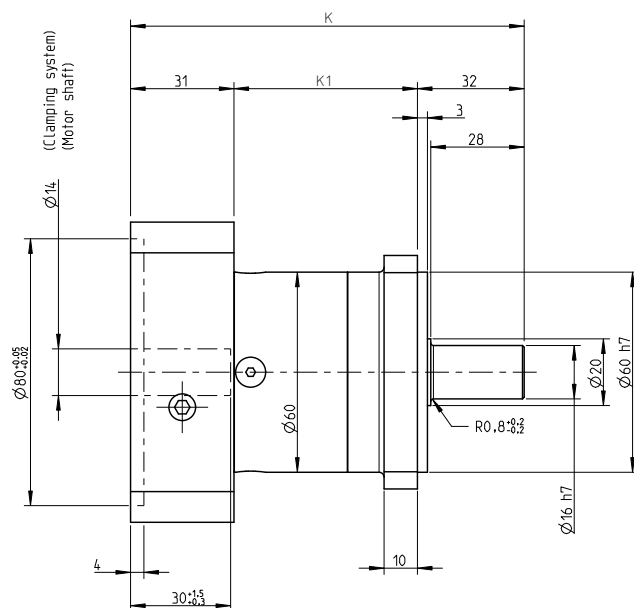


Engineering data		Mechanical data	
Ratio	10	Radial force for 20'000h	900 N*
Number of stages	1	Radial force for 30'000h	700 N*
Rated output torque	12.5 Nm	Max. radial force	1500 N*
Cycling output torque	15 Nm	Axial force for 20'000h	1000 N
Max output torque	24 Nm	Axial force for 30'000h	800 N
Emergency output torque	75 Nm	Max. axial force	1950 N
Rated input speed	4500 rpm	Protection	IP54
Max input speed	13000 rpm	Input inertia	0.09 kgcm ²
Efficiency	96 %*	Mass	1.09 kg
Operating temperature	<-25; 90> °C	Tilting moment for 20'000h	37 Nm
Backlash	< 10 arcmin	Tilting moment for 30'000h	29 Nm
Service life	20000 h	Max. bending moment	12 Nm
Running noise	60 dB(A)	Output shaft design	Smooth shaft
Torsional stiffness	3.40 Nm/arcmin		

* at rated speed & torque

* Defined for point of action at ½ output shaft length

Lubrication		Supported motors	
Type	Standard	Motor types	TGN3, TGT3, TGH3
Lubricant	Grease (lifetime lubrication)	Clamping diameter	14 mm
Customs info		Input flange	Motor adaptation - one part
HS Code	84834090	Installation position	Any

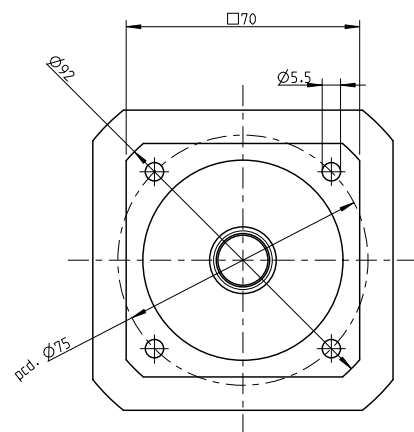

NO OF STAGES	K	K1
I. stage	118	55
II. stage	130.5	67.5
III. stage	143	80

INDEX	ZMĚNA	DATUM	PODPIS		
ZM.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
ROZM. ZAŘ.				ČSN	TR.Č.
VYPR.	NORM. REF.			POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.	SCHVÁLIL.	12.9.2020		STARÝ V.	Č.V.
NÁZEV					
Gearbox SGQ060				TGN3, TGH3, TGT3	
				Listů	List