
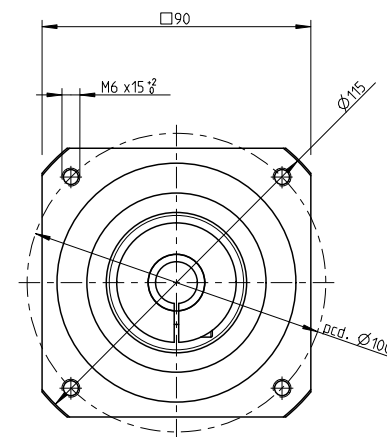
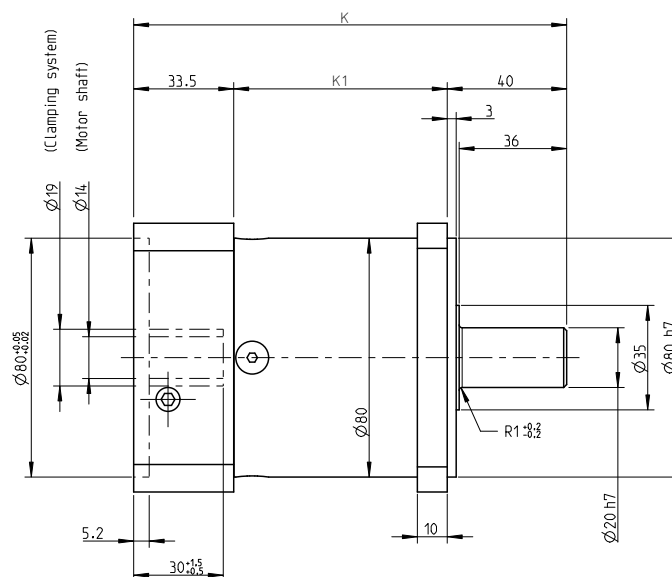


Engineering data		Mechanical data	
Ratio	12	Radial force for 20'000h	2050 N*
Number of stages	2	Radial force for 30'000h	1700 N*
Rated output torque	102 Nm	Max. radial force	2500 N*
Cycling output torque	120 Nm	Axial force for 20'000h	2500 N
Max output torque	192 Nm	Axial force for 30'000h	2000 N
Emergency output torque	240 Nm	Max. axial force	3800 N
Rated input speed	4000 rpm	Protection	IP54
Max input speed	7000 rpm	Input inertia	0.60 kgcm ²
Efficiency	96 %*	Mass	3.42 kg
Operating temperature	<-25; 90> °C	Tilting moment for 20'000h	101 Nm
Backlash	< 9 arcmin	Tilting moment for 30'000h	84 Nm
Service life	20000 h	Max. bending moment	16 Nm
Running noise	60 dB(A)	Output shaft design	Smooth shaft
Torsional stiffness	11.35 Nm/arcmin		

* at rated speed & torque

* Defined for point of action at ½ output shaft length

Lubrication		Supported motors	
Type	Standard	Motor types	TGN3, TGT3, TGH3
Lubricant	Grease (lifetime lubrication)	Clamping diameter	19 mm
Customs info		Input flange	Motor adaptation - one part
HS Code	84834090	Installation position	Any

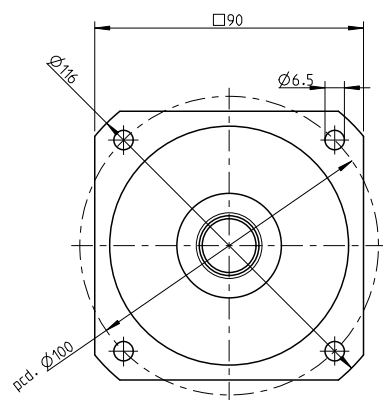

NO OF STAGES	K	K1
I. stage	145	71.5
II. stage	162.5	89
III. stage	180	106.5

INDEX	ZMĚNA	DATUM	PODPIS		
ZM.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
ROZM. ZAŘ.				ČSN	TR.Č.
VYPR.	NORM. REF.			POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.	SCHVÁLIL.	12.9.2020		STARÝ V.	Č.V.
NÁZEV					
Gearbox SGQ080				TGN3, TGH3, TGT3	
				Listů	Listů