


| Engineering data        |                 | Mechanical data            |                        |
|-------------------------|-----------------|----------------------------|------------------------|
| Ratio                   | 10              | Radial force for 20'000h   | 2950 N*                |
| Number of stages        | 1               | Radial force for 30'000h   | 2400 N*                |
| Rated output torque     | 80 Nm           | Max. radial force          | 4000 N*                |
| Cycling output torque   | 95 Nm           | Axial force for 20'000h    | 2500 N                 |
| Max output torque       | 152 Nm          | Axial force for 30'000h    | 2100 N                 |
| Emergency output torque | 480 Nm          | Max. axial force           | 3800 N                 |
| Rated input speed       | 3500 rpm        | Protection                 | IP54                   |
| Max input speed         | 6500 rpm        | Input inertia              | 1.38 kgcm <sup>2</sup> |
| Efficiency              | 97 %*           | Mass                       | 6.57 kg                |
| Operating temperature   | <-25; 90> °C    | Tilting moment for 20'000h | 232 Nm                 |
| Backlash                | < 9 arcmin      | Tilting moment for 30'000h | 188 Nm                 |
| Service life            | 20000 h         | Max. bending moment        | 40 Nm                  |
| Running noise           | 65 dB(A)        | Output shaft design        | Smooth shaft           |
| Torsional stiffness     | 17.30 Nm/arcmin |                            |                        |

\* at rated speed & torque

\* Defined for point of action at ½ output shaft length

| Lubrication  |                               | Supported motors      |                             |
|--------------|-------------------------------|-----------------------|-----------------------------|
| Type         | Standard                      | Motor types           | TGN5, TGT5, TGH5            |
| Lubricant    | Grease (lifetime lubrication) | Clamping diameter     | 24 mm                       |
| Customs info |                               | Input flange          | Motor adaptation - one part |
| HS Code      | 84834090                      | Installation position | Any                         |

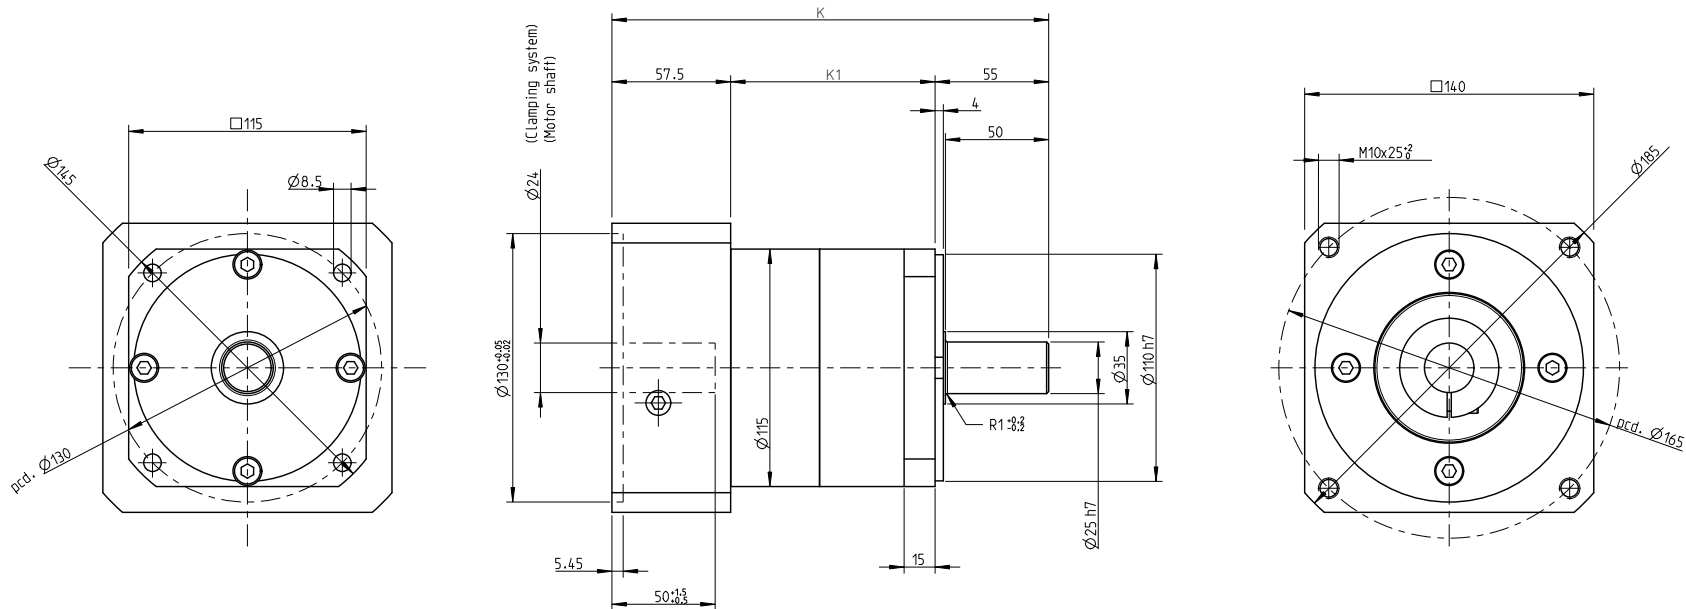

| NO OF STAGES | K     | K1    |
|--------------|-------|-------|
| I. stage     | 211.5 | 99    |
| II. stage    | 239.5 | 127   |
| III. stage   | 267   | 154.5 |

| INDEX          | ZMĚNA      | DATUM     | PODPIS   |                  |              |
|----------------|------------|-----------|----------|------------------|--------------|
|                |            |           |          |                  |              |
| ZM.MAT.        |            |           | T.O.     | HMOTNOST kg      | MĚŘ.         |
| ROZM.-POLOT.   |            |           |          |                  |              |
| ROZM. ZAR.     |            |           |          | ČSN              | TRČ.         |
| VYPR.          | NORM. REF. |           |          | POZN.            | Č. KUSOVNÍKU |
| PŘEKR.         |            |           |          |                  |              |
| TECHNOL.       | SCHVÁLIL.  | 12.9.2020 | STARÝ V. | Č.V.             |              |
| NÁZEV          |            |           |          | TGN5, TGH5, TGT5 |              |
| Gearbox SGQ120 |            |           |          | Listů            | List         |