
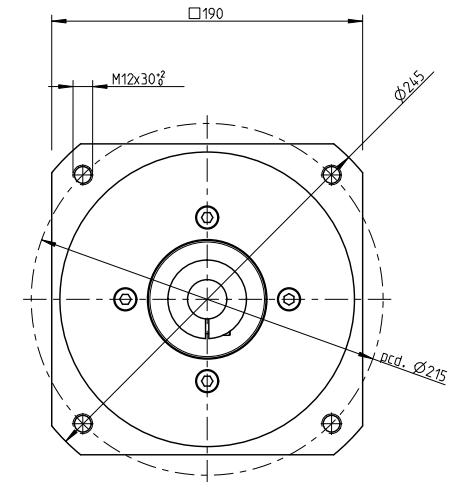
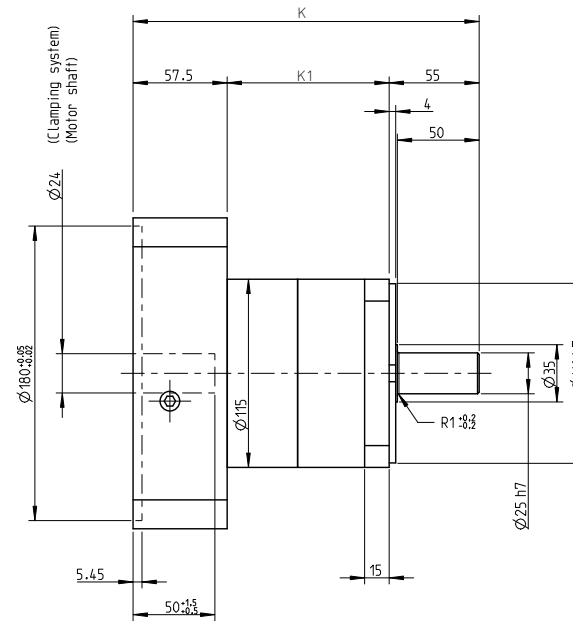


| Engineering data        |                 | Mechanical data            |                        |
|-------------------------|-----------------|----------------------------|------------------------|
| Ratio                   | 200             | Radial force for 20'000h   | 2950 N*                |
| Number of stages        | 3               | Radial force for 30'000h   | 2400 N*                |
| Rated output torque     | 195 Nm          | Max. radial force          | 4000 N*                |
| Cycling output torque   | 230 Nm          | Axial force for 20'000h    | 2500 N                 |
| Max output torque       | 365 Nm          | Axial force for 30'000h    | 2100 N                 |
| Emergency output torque | 500 Nm          | Max. axial force           | 3800 N                 |
| Rated input speed       | 3500 rpm        | Protection                 | IP54                   |
| Max input speed         | 6500 rpm        | Input inertia              | 1.42 kgcm <sup>2</sup> |
| Efficiency              | 84 %*           | Mass                       | 10.14 kg               |
| Operating temperature   | <-25; 90> °C    | Tilting moment for 20'000h | 232 Nm                 |
| Backlash                | < 11 arcmin     | Tilting moment for 30'000h | 188 Nm                 |
| Service life            | 20000 h         | Max. bending moment        | 40 Nm                  |
| Running noise           | 65 dB(A)        | Output shaft design        | Smooth shaft           |
| Torsional stiffness     | 17.30 Nm/arcmin |                            |                        |

\* at rated speed & torque

\* Defined for point of action at ½ output shaft length

| Lubrication  |                               | Supported motors      |                             |
|--------------|-------------------------------|-----------------------|-----------------------------|
| Type         | Standard                      | Motor types           | TGN6, TGT6                  |
| Lubricant    | Grease (lifetime lubrication) | Clamping diameter     | 24 mm                       |
| Customs info |                               | Input flange          | Motor adaptation - one part |
| HS Code      | 84834090                      | Installation position | Any                         |

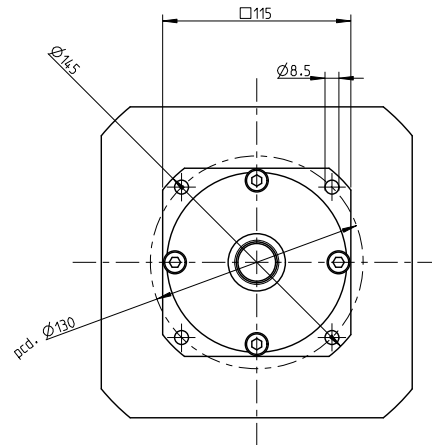

| NO OF STAGES | K     | K1    |
|--------------|-------|-------|
| I. stage     | 211.5 | 99    |
| II. stage    | 239.5 | 127   |
| III. stage   | 267   | 154.5 |

|              |                |           |        |             |              |
|--------------|----------------|-----------|--------|-------------|--------------|
| INDEX        | ZMĚNA          | DATUM     | PODPIS |             |              |
| ZM.MAT.      |                |           | T.O.   | HMOTNOST kg | MĚŘ.         |
| ROZM.-POLOT. |                |           |        | ČSN         | TR.Č.        |
| ROZM. ZAR.   |                |           |        | POZN.       | Č. KUSOVNÍKU |
| VYPR.        | NORM. REF.     |           |        | STARÝ V.    | Č.V.         |
| PŘEKR.       |                |           |        |             |              |
| TECHNOL.     | SCHVÁLIL.      | 12.9.2020 |        |             |              |
| NÁZEV        | Gearbox SGQ120 |           |        | TGN6, TGT6  |              |
|              |                |           |        | Listů       | List         |