

Engineering data		Mechanical data	
Ratio	12	Radial force for 20'000h	1400 N
Number of stages	2	Radial force for 30'000h	1200 N
Rated output torque	102 Nm	Max. radial force	2200 N
Cycling output torque	120 Nm	Axial force for 20'000h	3000 N
Max output torque	192 Nm	Axial force for 30'000h	3000 N
Emergency output torque	240 Nm	Max. axial force	3300 N
Rated input speed	3800 rpm	Protection	IP54
Max input speed	7000 rpm	Input inertia	0.62 kgcm ²
Efficiency	96 %*	Mass	3.46 kg
Operating temperature	<-25; 90> °C	Tilting moment for 20'000h	46 Nm
Backlash	< 9 arcmin	Tilting moment for 30'000h	40 Nm
Service life	20000 h	Max. bending moment	16 Nm
Running noise	60 dB(A)		
Torsional stiffness	27.70 Nm/arcmin		


* at rated speed & torque

Lubrication	
Type	Standard
Lubricant	Grease (lifetime lubrication)

Customs info	
HS Code	84834090

Output shaft design Flange with dowel hole

Supported motors	
Motor types	TGN4, TGT4, TGH4
Clamping diameter	19 mm
Input flange	Motor adaptation - one part
Installation position	Any

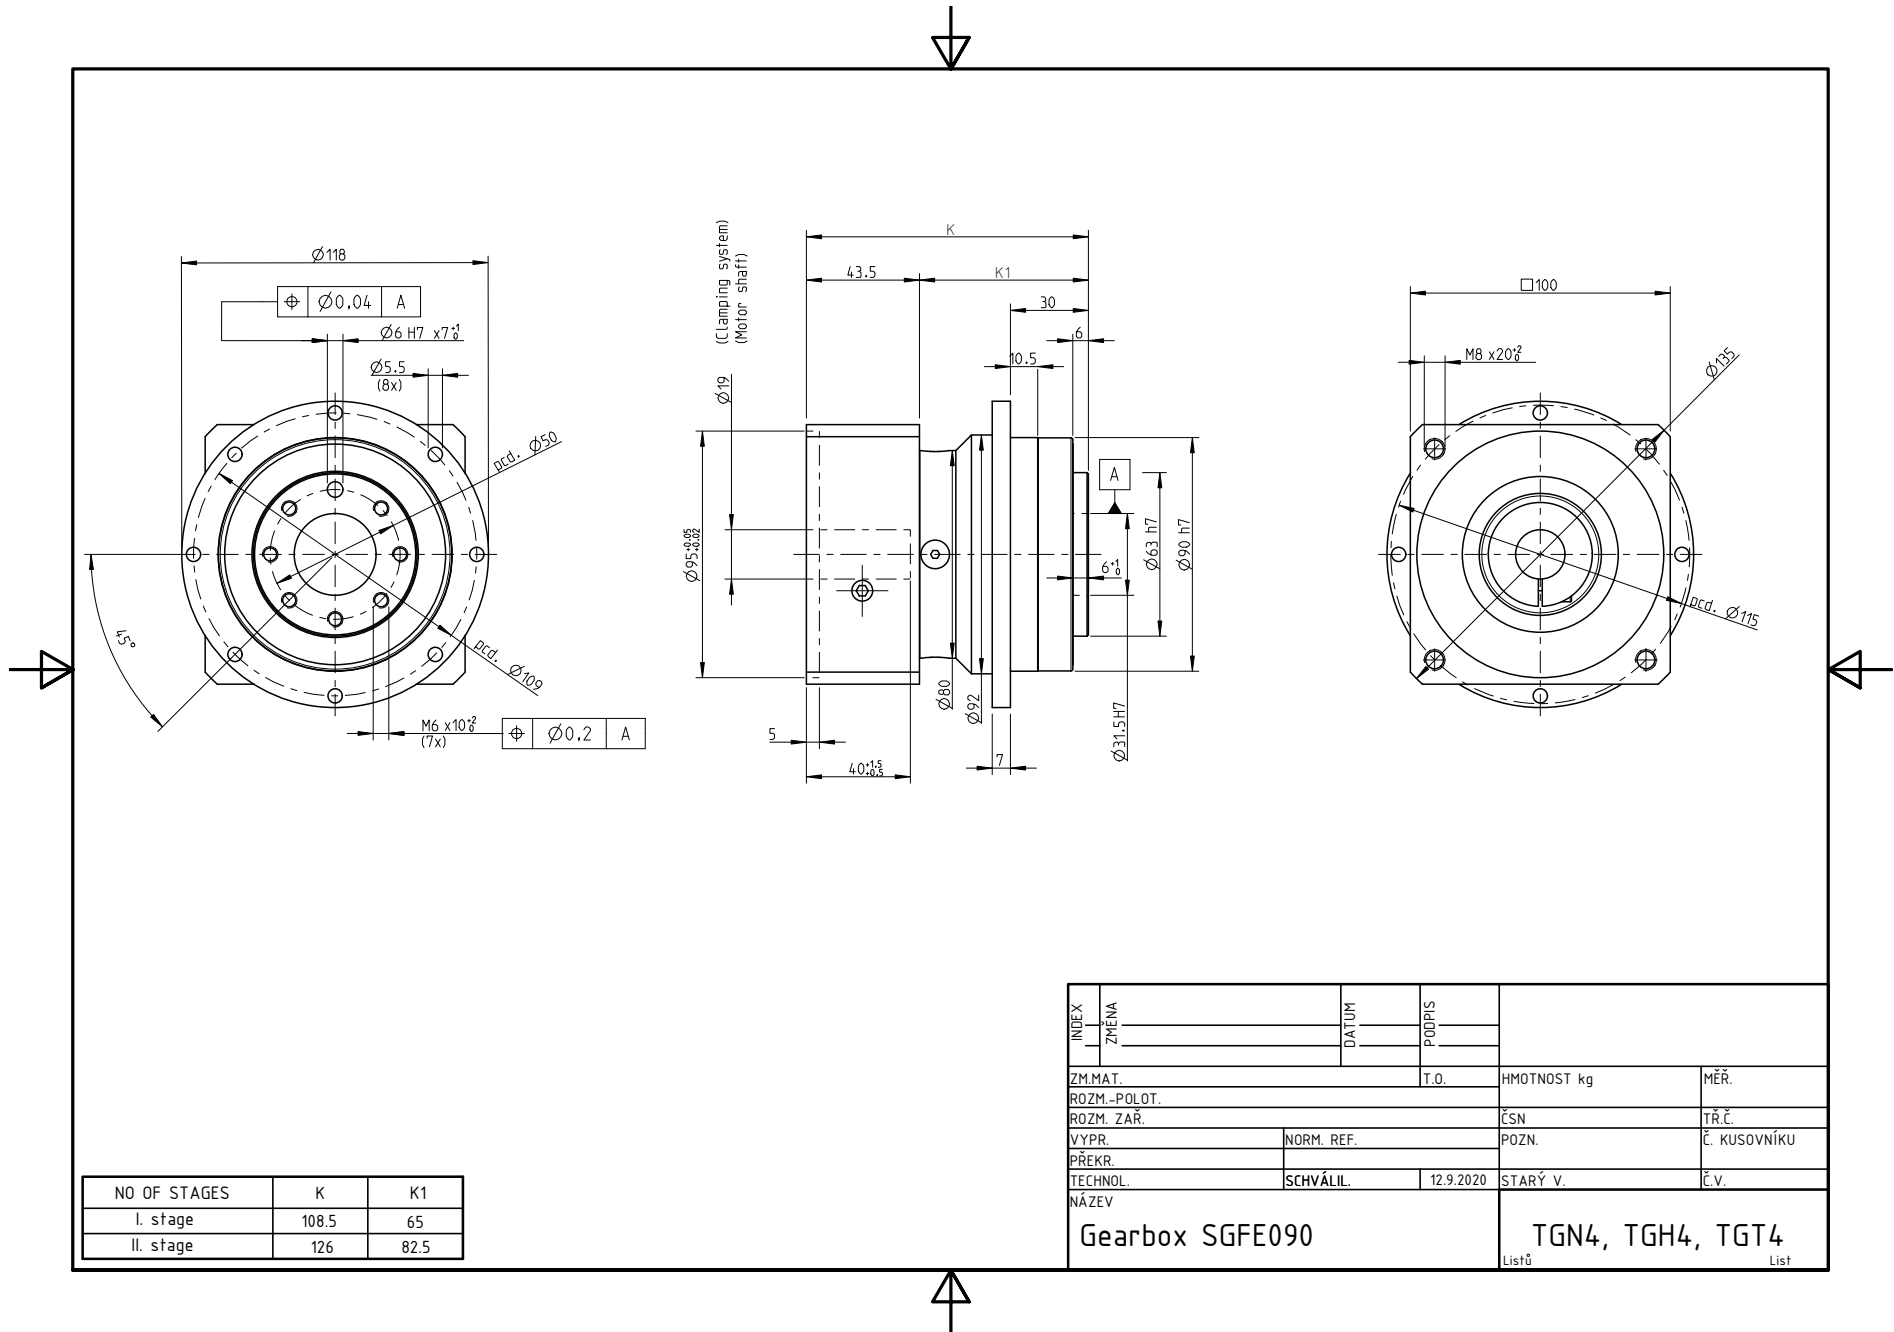

INDEX	ZMĚNA	DATUM	PODPIS		
ZM.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
ROZM. ZAŘ.				ČSN	TR.Č.
VYPR.	NORM. REF.			POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.	SCHVÁLIL.	12.9.2020		STARÝ V.	Č.V.
NÁZEV					
Gearbox SGFE090				TGN4, TGH4, TGT4	
				Listů	List