



| Engineering data (WIN 776)           |                            | Mechanical data (setting 48)                           |                                        |
|--------------------------------------|----------------------------|--------------------------------------------------------|----------------------------------------|
| DC bus voltage                       | 560 V DC                   | Max mechanical speed                                   | 12000 rpm                              |
| Nominal AC voltage                   | 380 V AC (rms)             | Mech. time constant                                    | 1.49 ms                                |
| Rated voltage                        | 207 V AC (rms)             | Thermal time constant                                  | 12 min                                 |
| Rated power                          | 226 W                      | Rotor inertia                                          | 0.07 kgcm <sup>2</sup>                 |
| Rated speed                          | 4500 rpm                   | Protection                                             | IP64                                   |
| Rated torque                         | 0.48 Nm                    | Color                                                  | RAL 9005                               |
| Rated current                        | 0.9 A (rms)                | Cooling                                                | Convection                             |
| Peak torque                          | 2.16 Nm                    | Motor-only mass                                        | 1.15 kg                                |
| Peak current                         | 4.3 A (rms)                | Max. axial force 20kh                                  | 42 N                                   |
| Stall torque                         | 0.54 Nm                    | Max. radial force 20kh                                 | 222 N*                                 |
| Stall current                        | 0.93 A (rms)               | Max. axial force 100kh                                 | 25 N                                   |
| No load speed                        | 10710 rpm                  | Max. radial force 100kh                                | 130 N*                                 |
| EMF constant ±10%                    | 35 V AC (rms)<br>/ 1000rpm | * Defined for point of action at ½ output shaft length |                                        |
| Theoretical torque constant ±10%     | 0.58 Nm / A<br>(rms)       | Sensors                                                |                                        |
| Torque constant ±10%<br>@ rated load | 0.53 Nm / A<br>(rms)       | Temperature                                            | PT1000 {PT1000}                        |
| Number of poles                      | 6                          | Feedback                                               | EDM35 (HDSL) multi-turn,<br>20+12 bits |
| Electrical time constant             | 1.25 ms                    | Brake                                                  |                                        |
| Winding terminal resistance          | 41.1 Ω                     | Braking torque                                         | 2.00 Nm                                |
| Rotary field terminal inductance     | 51.2 mH                    | Voltage                                                | 24 V DC                                |
| <b>Customs info</b>                  |                            | Power @20°C                                            | 11.0 W                                 |
| HS Code                              | 85015100                   | Current @20°C                                          | 0.46 A                                 |
|                                      |                            | Inertia                                                | 0.08 kgcm <sup>2</sup>                 |
|                                      |                            | Mass                                                   | 0.20 kg                                |

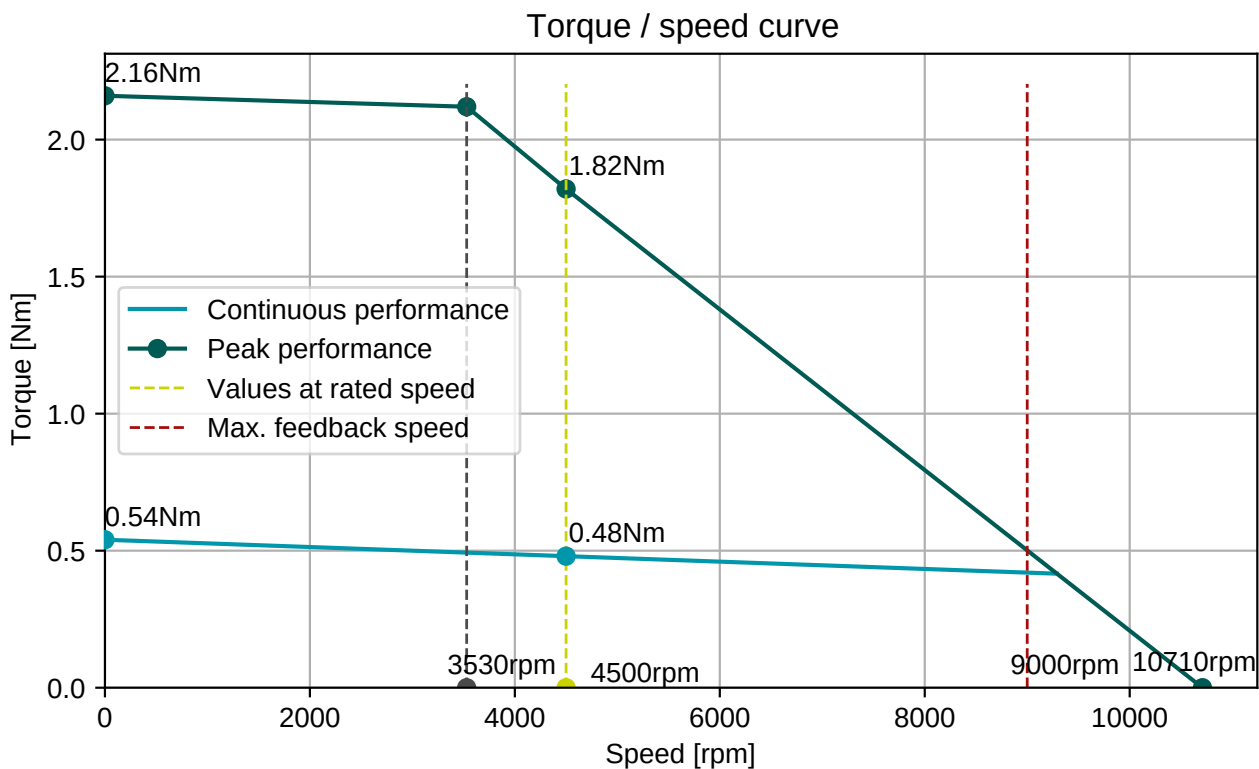

**BGC110N00001216000**

M23, 8 poles, rotary

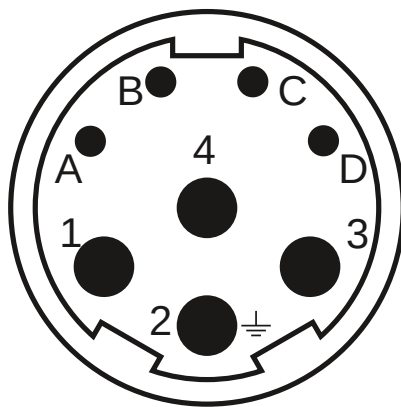

**Connector 1 (283)**

|   |          |
|---|----------|
| 1 | U        |
| 4 | V        |
| 3 | W        |
| 2 | PE       |
| A | Brake+   |
| B | Brake-   |
| C | GND/DSL- |
| D | +Us/DSL+ |

