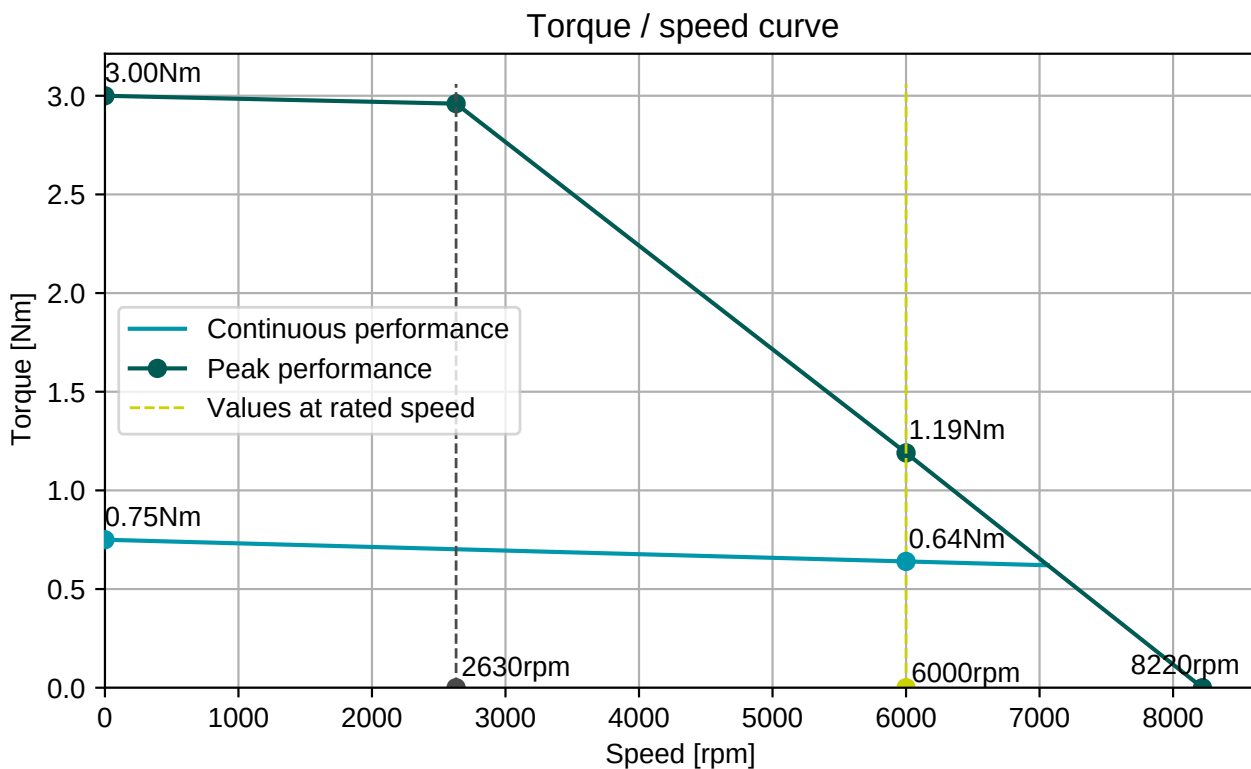


Engineering data (WIN 819)		Mechanical data (setting 48)							
DC bus voltage	320 V DC	Max mechanical speed	12000 rpm						
Nominal AC voltage	220 V AC (rms)	Mech. time constant	1.08 ms						
Rated voltage	190 V AC (rms)	Thermal time constant	12 min						
Rated power	402 W	Rotor inertia	0.09 kgcm²						
Rated speed	6000 rpm	Protection	IP64						
Rated torque	0.64 Nm	Color	RAL 9005						
Rated current	1.57 A (rms)	Cooling	Convection						
Peak torque	3 Nm	Motor-only mass	0.9 kg						
Peak current	7.9 A (rms)	Max. axial force 20kh	37 N						
Stall torque	0.75 Nm	Max. radial force 20kh	195 N*						
Stall current	1.71 A (rms)	Max. axial force 100kh	22 N						
No load speed	8220 rpm	Max. radial force 100kh	114 N*						
EMF constant ±10%	26.5 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length							
Theoretical torque constant ±10%	0.44 Nm / A (rms)								
Torque constant ±10% @ rated load	0.41 Nm / A (rms)	<table><tr><th colspan="2">Sensors</th></tr><tr><td>Temperature</td><td>PT1000 {PT1000}</td></tr><tr><td>Feedback</td><td>EKS36 (HDSL) single-turn, 18 bits, SIL2</td></tr></table>		Sensors		Temperature	PT1000 {PT1000}	Feedback	EKS36 (HDSL) single-turn, 18 bits, SIL2
Sensors									
Temperature	PT1000 {PT1000}								
Feedback	EKS36 (HDSL) single-turn, 18 bits, SIL2								
Number of poles	6								
Electrical time constant	1.35 ms								
Winding terminal resistance	13.36 Ω								
Rotary field terminal inductance	18 mH								
Customs info									
HS Code	85015100								


EGA201N00000800000

M15, 9 poles, rotary


Connector 1 (304)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-
3	+Us/DSL+
4	GND/DSL-

