

Engineering data (WIN 740)

DC bus voltage	24 V DC
Nominal AC voltage	17 V AC (rms)
Rated voltage	11 V AC (rms)
Rated power	82 W
Rated speed	3000 rpm
Rated torque	0.26 Nm
Rated current	8.04 A (rms)
Peak torque	1.04 Nm
Peak current	32.9 A (rms)
Stall torque	0.28 Nm
Stall current	7.9 A (rms)
No load speed	7660 rpm
EMF constant ±10%	2.2 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.04 Nm / A (rms)
Torque constant ±10% @ rated load	0.03 Nm / A (rms)
Number of poles	6
Electrical time constant	0.98 ms
Winding terminal resistance	0.43 Ω
Rotary field terminal inductance	0.42 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	2.81 ms
Thermal time constant	10 min
Rotor inertia	0.05 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	0.9 kg
Max. axial force 20kh	47 N
Max. radial force 20kh	247 N*
Max. axial force 100kh	27 N
Max. radial force 100kh	145 N*

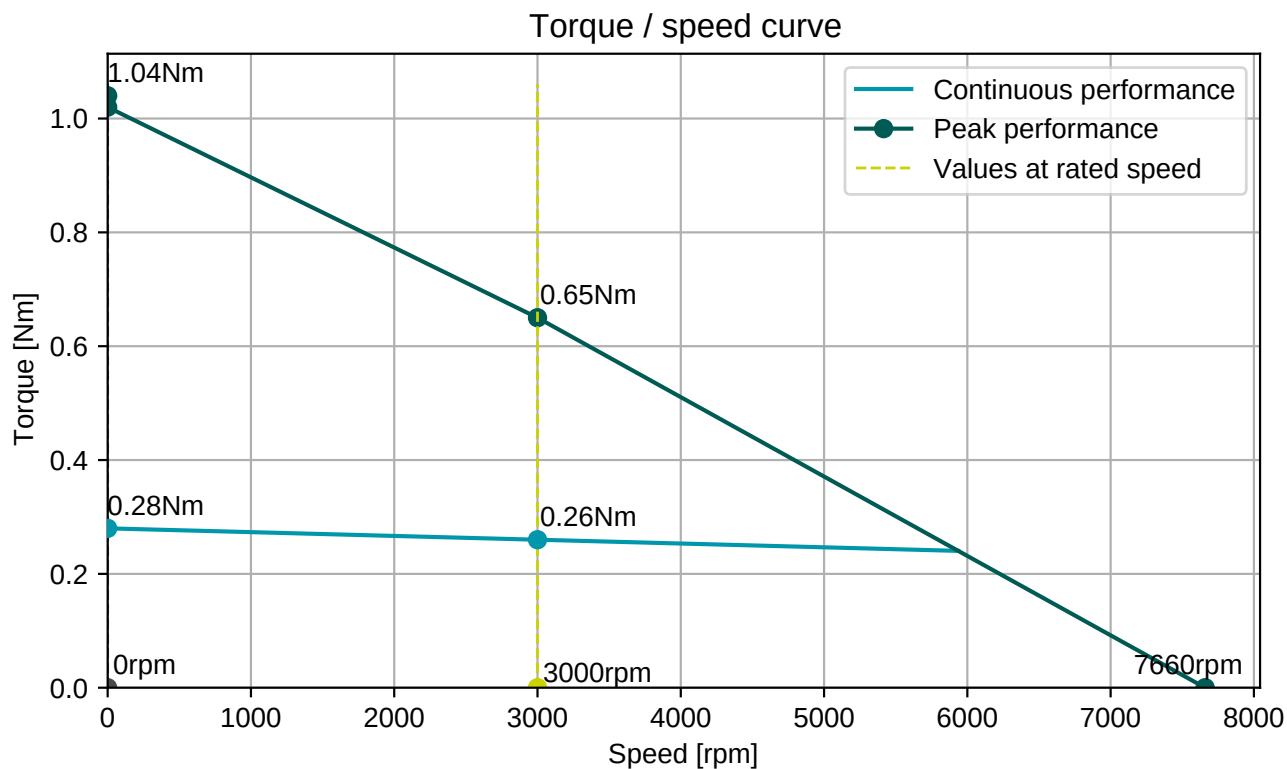
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2

Brake

Braking torque	2.00 Nm
Voltage	24 V DC
Power @20°C	11.0 W
Current @20°C	0.46 A
Inertia	0.08 kgcm ²
Mass	0.20 kg


EGA201N00000800000

M15, 9 poles, rotary


Connector 1 (304)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-
3	+Us/DSL+
4	GND/DSL-

