

Engineering data (WIN 926)

DC bus voltage	320 V DC
Nominal AC voltage	220 V AC (rms)
Rated voltage	163 V AC (rms)
Rated power	293 W
Rated speed	8000 rpm
Rated torque	0.35 Nm
Rated current	1.38 A (rms)
Peak torque	2.16 Nm
Peak current	8.6 A (rms)
Stall torque	0.54 Nm
Stall current	1.87 A (rms)
No load speed	12410 rpm
EMF constant ±10%	17.5 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.29 Nm / A (rms)
Torque constant ±10% @ rated load	0.25 Nm / A (rms)
Number of poles	6
Electrical time constant	1.25 ms
Winding terminal resistance	10.2 Ω
Rotary field terminal inductance	12.8 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	1.48 ms
Thermal time constant	12 min
Rotor inertia	0.07 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	0.9 kg
Max. axial force 20kh	35 N
Max. radial force 20kh	183 N*
Max. axial force 100kh	20 N
Max. radial force 100kh	107 N*

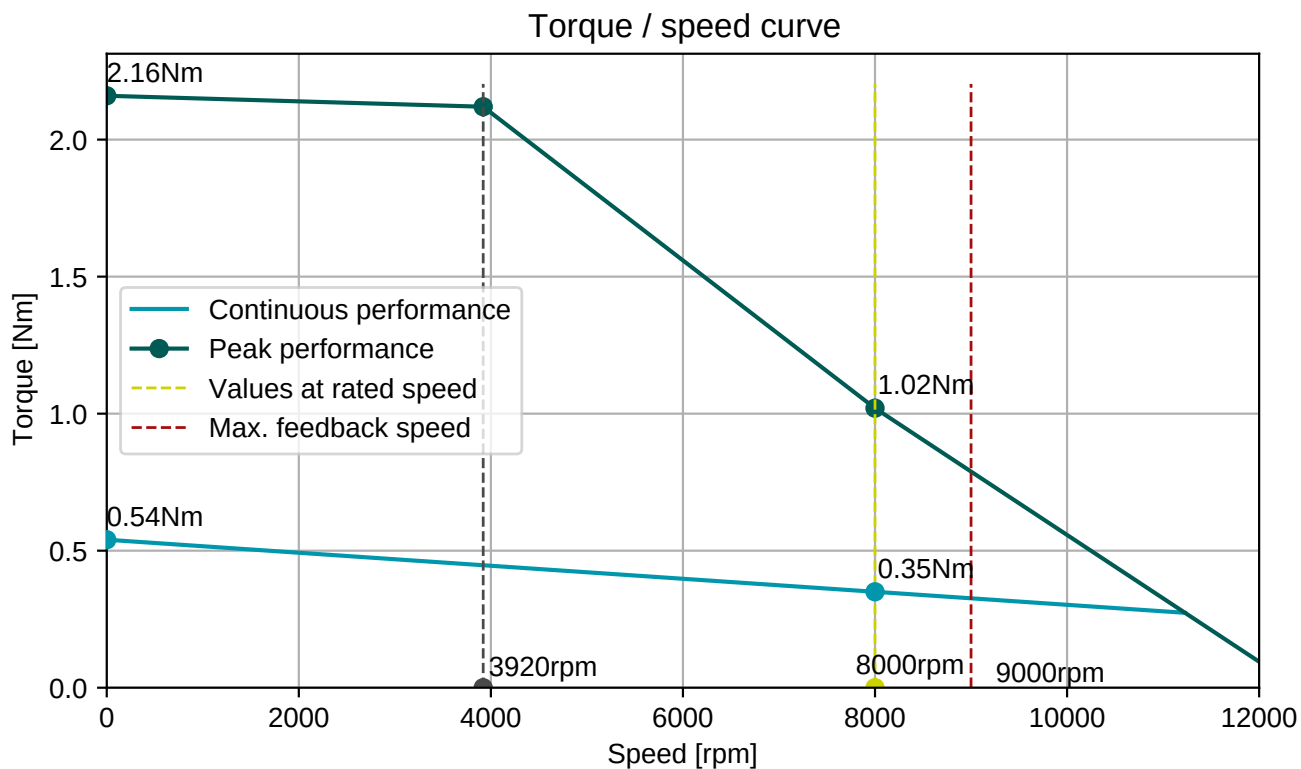
* Defined for point of action at ½ output shaft length

Sensors

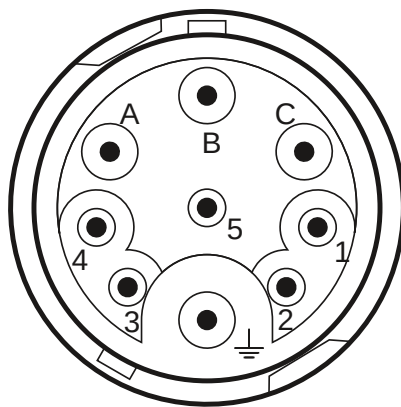
Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2

Brake

Braking torque	2.00 Nm
Voltage	24 V DC
Power @20°C	11.0 W
Current @20°C	0.46 A
Inertia	0.08 kgcm ²
Mass	0.20 kg


EGA201N00000800000

M15, 9 poles, rotary


Connector 1 (304)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-
3	+Us/DSL+
4	GND/DSL-

