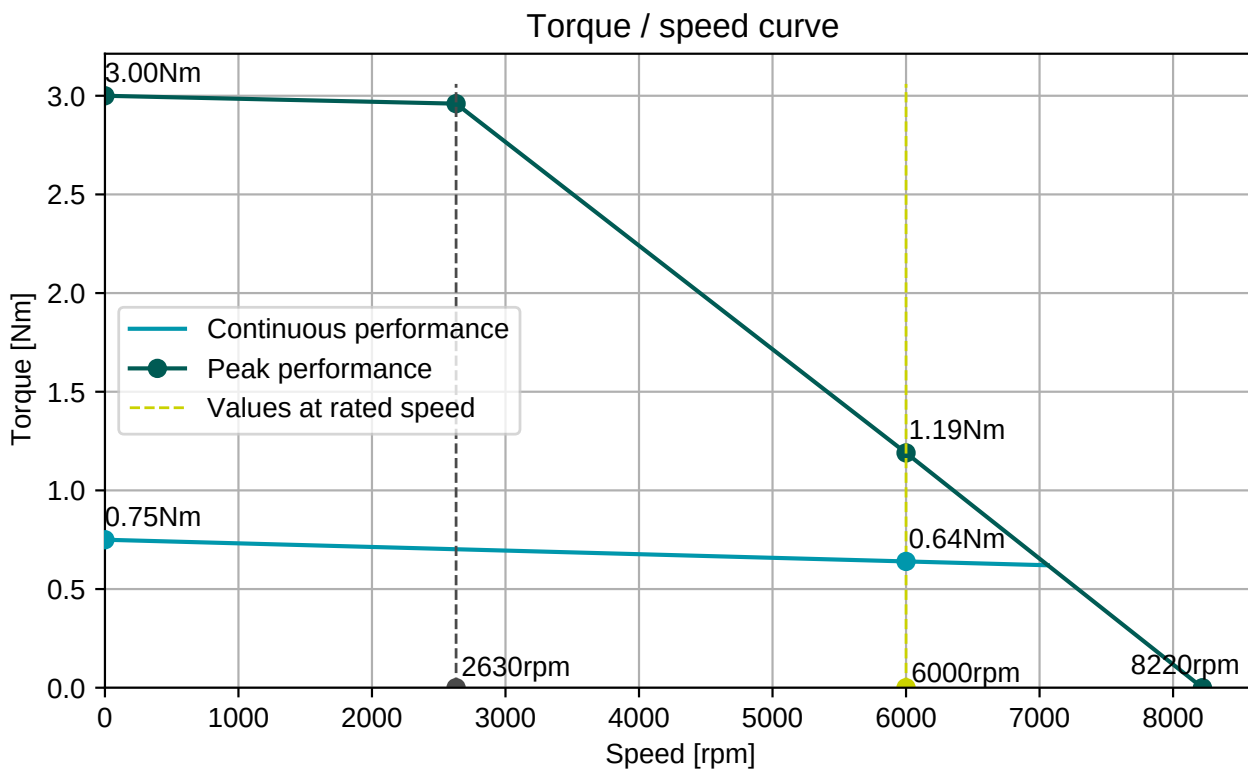
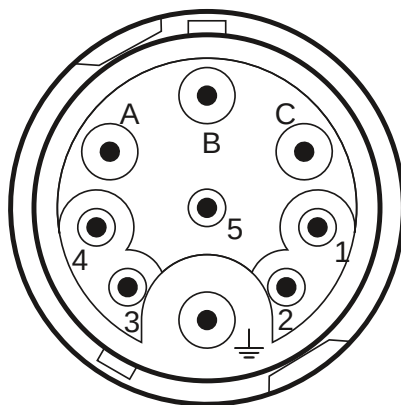


Engineering data (WIN 819)		Mechanical data (setting 48)	
DC bus voltage	320 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	220 V AC (rms)	Mech. time constant	1.08 ms
Rated voltage	190 V AC (rms)	Thermal time constant	12 min
Rated power	402 W	Rotor inertia	0.09 kgcm ²
Rated speed	6000 rpm	Protection	IP64
Rated torque	0.64 Nm	Color	RAL 9005
Rated current	1.57 A (rms)	Cooling	Convection
Peak torque	3 Nm	Motor-only mass	1.35 kg
Peak current	7.9 A (rms)	Max. axial force 20kh	39 N
Stall torque	0.75 Nm	Max. radial force 20kh	206 N*
Stall current	1.71 A (rms)	Max. axial force 100kh	23 N
No load speed	8220 rpm	Max. radial force 100kh	121 N*
EMF constant ±10%	26.5 V AC (rms) / 1000rpm	<i>* Defined for point of action at ½ output shaft length</i>	
Theoretical torque constant ±10%	0.44 Nm / A (rms)	Sensors	
Torque constant ±10% @ rated load	0.41 Nm / A (rms)	Temperature	PT1000 {PT1000}
Number of poles	6	Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2
Electrical time constant	1.35 ms	Brake	
Winding terminal resistance	13.36 Ω	Braking torque	2.00 Nm
Rotary field terminal inductance	18 mH	Voltage	24 V DC
Customs info		Power @20°C	11.0 W
HS Code	85015100	Current @20°C	0.46 A
		Inertia	0.08 kgcm ²
		Mass	0.20 kg


EGA201N00000800000

M15, 9 poles, rotary


Connector 1 (304)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-
3	+Us/DSL+
4	GND/DSL-

