


Engineering data (WIN 1615)		Mechanical data (setting 48)	
DC bus voltage	18 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	12 V AC (rms)	Mech. time constant	1.47 ms
Rated voltage	10 V AC (rms)	Thermal time constant	12 min
Rated power	205 W	Rotor inertia	0.07 kgcm ²
Rated speed	4000 rpm	Protection	IP64
Rated torque	0.49 Nm	Color	RAL 9005
Rated current	17.51 A (rms)	Cooling	Convection
Peak torque	2.16 Nm	Motor-only mass	0.9 kg
Peak current	82.5 A (rms)	Max. axial force 20kh	44 N
Stall torque	0.54 Nm	Max. radial force 20kh	231 N*
Stall current	17.9 A (rms)	Max. axial force 100kh	26 N
No load speed	6480 rpm	Max. radial force 100kh	135 N*
EMF constant ±10%	1.82 V AC (rms) / 1000rpm	<i>* Defined for point of action at ½ output shaft length</i>	
Theoretical torque constant ±10%	0.03 Nm / A (rms)	Sensors	
Torque constant ±10% @ rated load	0.03 Nm / A (rms)	Temperature	PT1000 {PT1000}
Number of poles	6	Feedback	EEM37 (HDSL) multi-turn, 17+12 bits
Electrical time constant	1.27 ms	Brake	
Winding terminal resistance	0.11 Ω	Braking torque	2.00 Nm
Rotary field terminal inductance	0.14 mH	Voltage	24 V DC
Customs info		Power @20°C	11.0 W
HS Code	85015100	Current @20°C	0.46 A
		Inertia	0.08 kgcm ²
		Mass	0.20 kg



BGC110N00001216000

M23, 8 poles, rotary

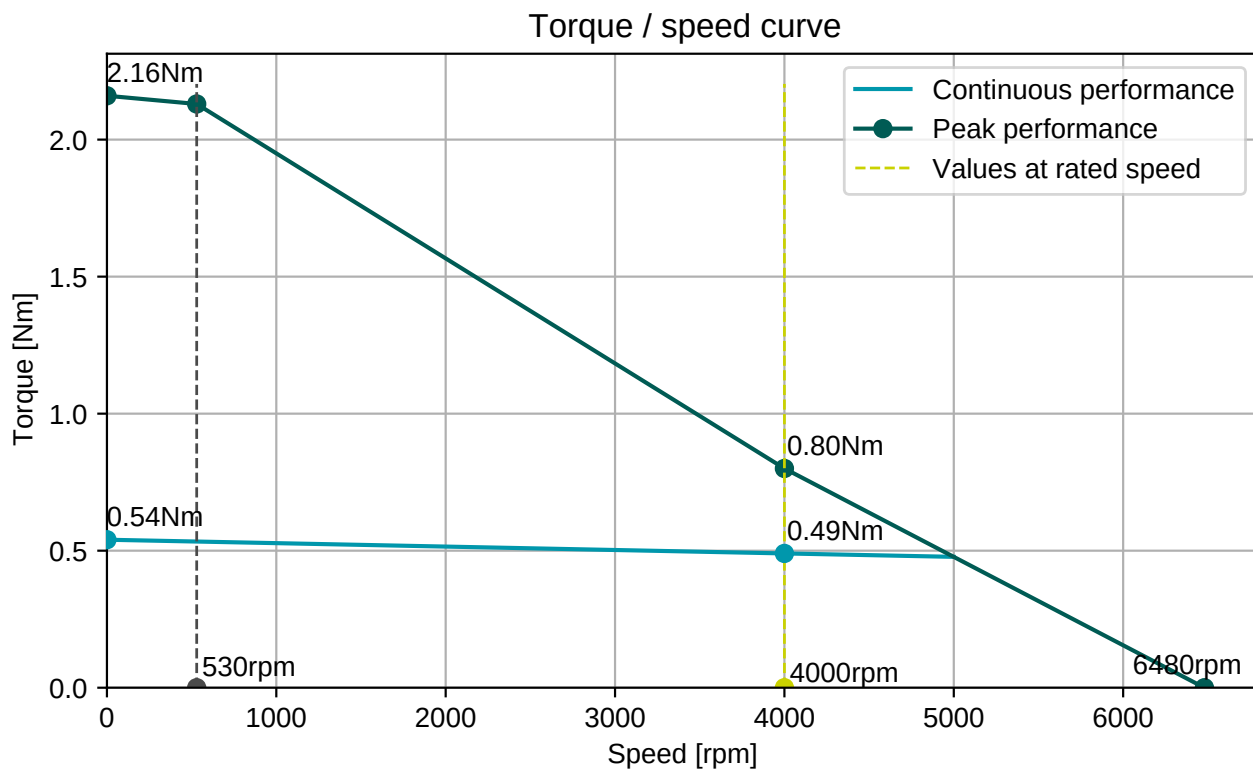

Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

