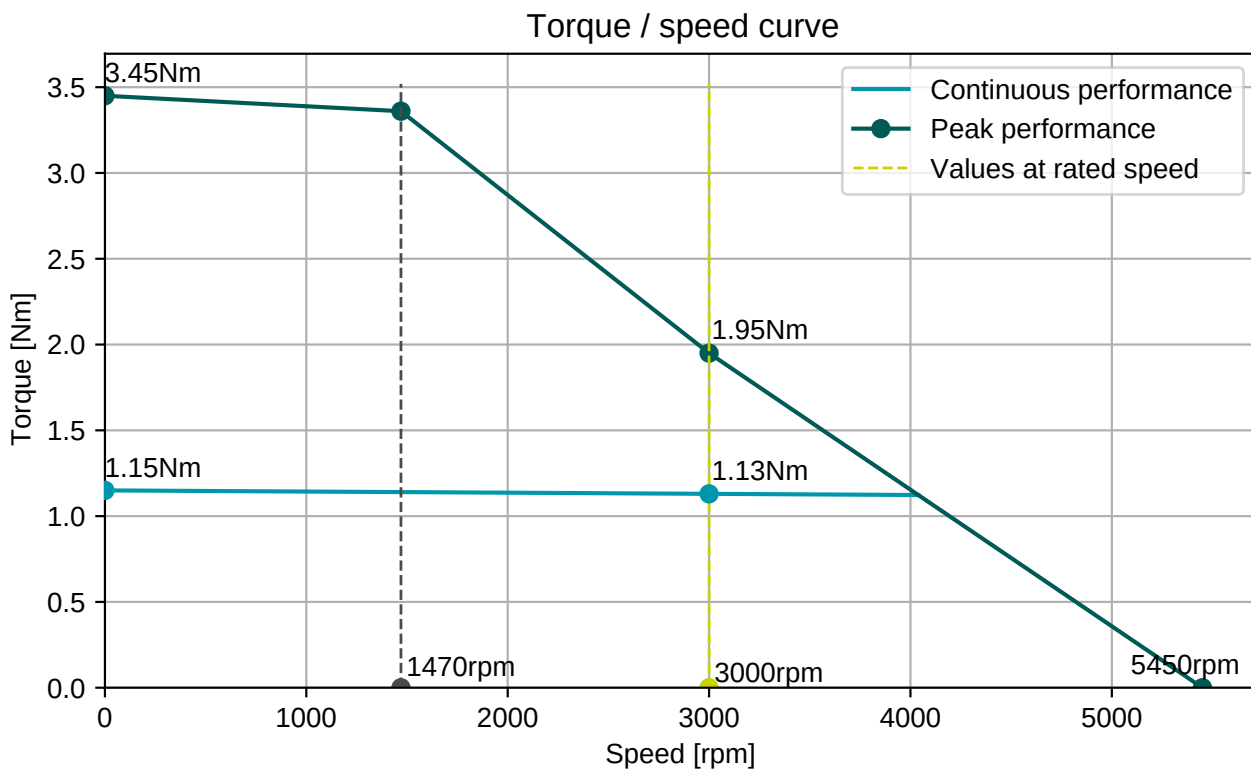


Engineering data (WIN 1166)		Mechanical data (setting 48)	
DC bus voltage	48 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	34 V AC (rms)	Mech. time constant	1.38 ms
Rated voltage	25 V AC (rms)	Thermal time constant	21 min
Rated power	355 W	Rotor inertia	0.31 kgcm ²
Rated speed	3000 rpm	Protection	IP64
Rated torque	1.13 Nm	Color	RAL 9005
Rated current	12.9 A (rms)	Cooling	Convection
Peak torque	3.45 Nm	Motor-only mass	2 kg
Peak current	49.6 A (rms)	Max. axial force 20kh	57 N
Stall torque	1.15 Nm	Max. radial force 20kh	299 N*
Stall current	11.3 A (rms)	Max. axial force 100kh	33 N
No load speed	5450 rpm	Max. radial force 100kh	175 N*
EMF constant ±10%	6.2 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length	
Theoretical torque constant ±10%	0.1 Nm / A (rms)		
Torque constant ±10% @ rated load	0.1 Nm / A (rms)		
Number of poles	10		
Electrical time constant	2.22 ms		
Winding terminal resistance	0.27 Ω		
Rotary field terminal inductance	0.6 mH		
Customs info		Sensors	
HS Code	85015100	Temperature	PT1000 {PT1000}
		Feedback	EDM35 (HDSL) multi-turn, 20+12 bits
		Brake	
		Braking torque	4.50 Nm
		Voltage	24 V DC
		Power @20°C	12.0 W
		Current @20°C	0.50 A
		Inertia	0.20 kgcm ²
		Mass	0.47 kg


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

