

**Engineering data (WIN 739)**

|                                   |                            |
|-----------------------------------|----------------------------|
| DC bus voltage                    | 320 V DC                   |
| Nominal AC voltage                | 220 V AC (rms)             |
| Rated voltage                     | 193 V AC (rms)             |
| Rated power                       | 942 W                      |
| Rated speed                       | 3000 rpm                   |
| Rated torque                      | 3.00 Nm                    |
| Rated current                     | 3.47 A (rms)               |
| Peak torque                       | 10.5 Nm                    |
| Peak current                      | 12.3 A (rms)               |
| Stall torque                      | 3.5 Nm                     |
| Stall current                     | 3.41 A (rms)               |
| No load speed                     | 3540 rpm                   |
| EMF constant ±10%                 | 62 V AC (rms)<br>/ 1000rpm |
| Theoretical torque constant ±10%  | 1.03 Nm / A<br>(rms)       |
| Torque constant ±10% @ rated load | 0.86 Nm / A<br>(rms)       |
| Number of poles                   | 10                         |
| Electrical time constant          | 2.86 ms                    |
| Winding terminal resistance       | 4.27 Ω                     |
| Rotary field terminal inductance  | 12.2 mH                    |

**Customs info**

|         |          |
|---------|----------|
| HS Code | 85015220 |
|---------|----------|

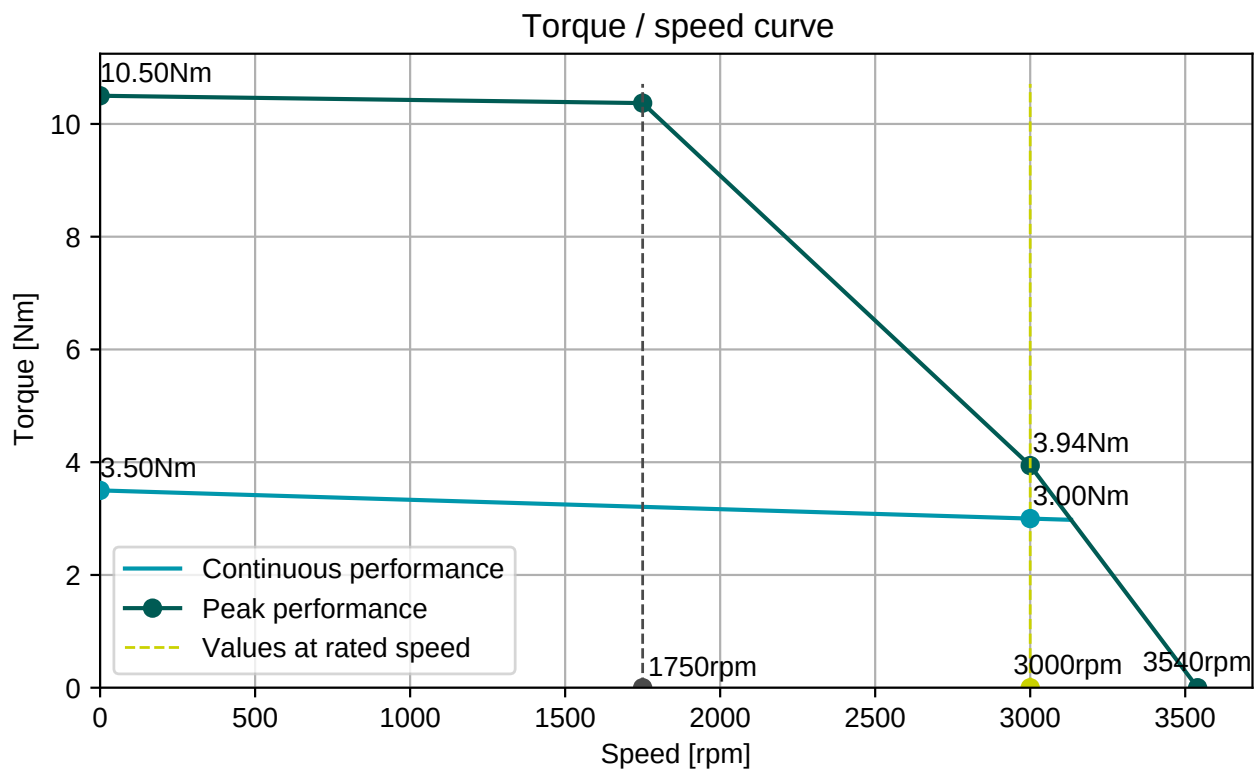
**Mechanical data (setting 48)**

|                         |                        |
|-------------------------|------------------------|
| Max mechanical speed    | 12000 rpm              |
| Mech. time constant     | 0.73 ms                |
| Thermal time constant   | 27 min                 |
| Rotor inertia           | 1.04 kgcm <sup>2</sup> |
| Protection              | IP64                   |
| Color                   | RAL 9005               |
| Cooling                 | Convection             |
| Motor-only mass         | 2.9 kg                 |
| Max. axial force 20kh   | 68 N                   |
| Max. radial force 20kh  | 356 N*                 |
| Max. axial force 100kh  | 40 N                   |
| Max. radial force 100kh | 208 N*                 |

\* Defined for point of action at ½ output shaft length

**Sensors**

|             |                                         |
|-------------|-----------------------------------------|
| Temperature | PT1000 {PT1000}                         |
| Feedback    | EKS36 (HDSL) single-turn, 18 bits, SIL2 |


**EGA201N00000800000**

M15, 9 poles, rotary


**Connector 1 (304)**

|           |          |
|-----------|----------|
| <b>A</b>  | U        |
| <b>B</b>  | V        |
| <b>C</b>  | W        |
| <b>PE</b> | PE       |
| <b>1</b>  | Brake+   |
| <b>2</b>  | Brake-   |
| <b>3</b>  | +Us/DSL+ |
| <b>4</b>  | GND/DSL- |

