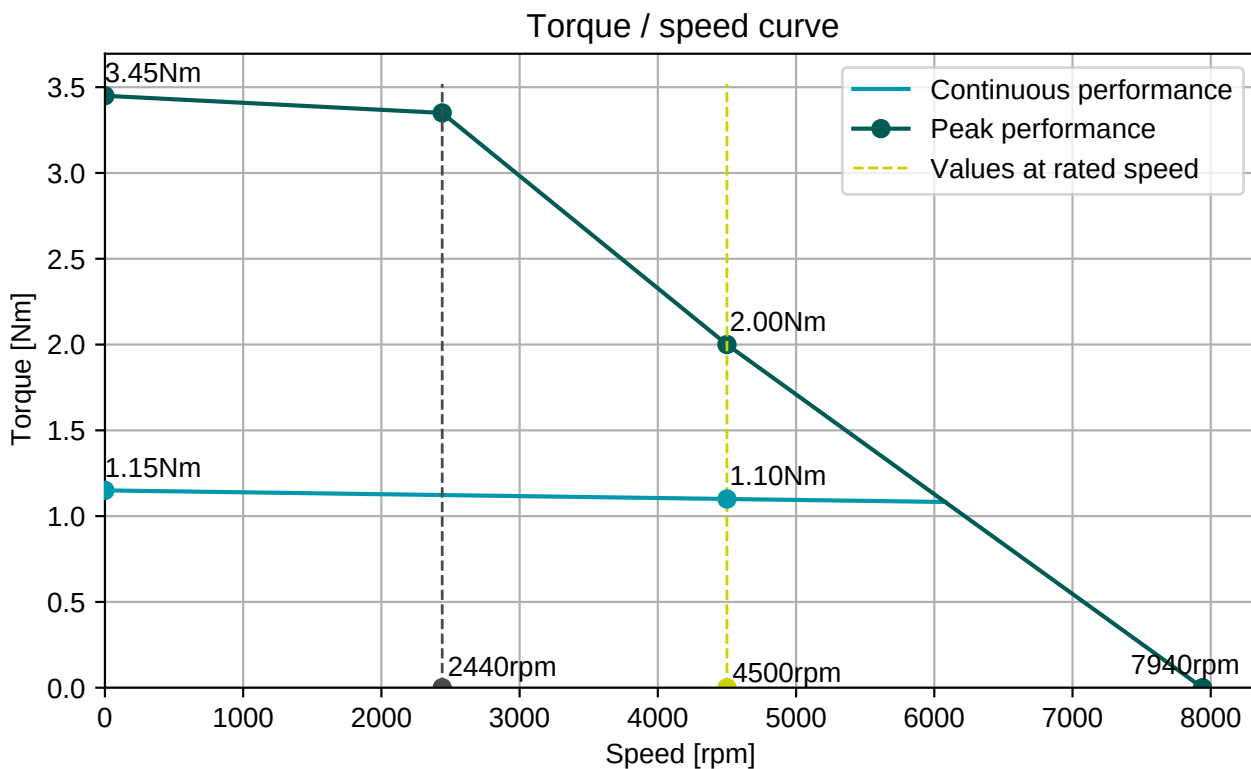


| Engineering data (WIN 960)        |                              | Mechanical data (setting 48)                           |                                         |
|-----------------------------------|------------------------------|--------------------------------------------------------|-----------------------------------------|
| DC bus voltage                    | 320 V DC                     | Max mechanical speed                                   | 12000 rpm                               |
| Nominal AC voltage                | 220 V AC (rms)               | Mech. time constant                                    | 1.39 ms                                 |
| Rated voltage                     | 154 V AC (rms)               | Thermal time constant                                  | 21 min                                  |
| Rated power                       | 518 W                        | Rotor inertia                                          | 0.31 kgcm <sup>2</sup>                  |
| Rated speed                       | 4500 rpm                     | Protection                                             | IP64                                    |
| Rated torque                      | 1.10 Nm                      | Color                                                  | RAL 9005                                |
| Rated current                     | 2.94 A (rms)                 | Cooling                                                | Convection                              |
| Peak torque                       | 3.45 Nm                      | Motor-only mass                                        | 2 kg                                    |
| Peak current                      | 11.1 A (rms)                 | Max. axial force 20kh                                  | 50 N                                    |
| Stall torque                      | 1.15 Nm                      | Max. radial force 20kh                                 | 261 N*                                  |
| Stall current                     | 2.53 A (rms)                 | Max. axial force 100kh                                 | 29 N                                    |
| No load speed                     | 7940 rpm                     | Max. radial force 100kh                                | 153 N*                                  |
| EMF constant ±10%                 | 27.5 V AC (rms)<br>/ 1000rpm | * Defined for point of action at ½ output shaft length |                                         |
| Theoretical torque constant ±10%  | 0.45 Nm / A (rms)            | Sensors                                                |                                         |
| Torque constant ±10% @ rated load | 0.37 Nm / A (rms)            | Temperature                                            | PT1000 {PT1000}                         |
| Number of poles                   | 10                           | Feedback                                               | EKS36 (HDSL) single-turn, 18 bits, SIL2 |
| Electrical time constant          | 2.23 ms                      | Brake                                                  |                                         |
| Winding terminal resistance       | 5.37 Ω                       | Braking torque                                         | 4.50 Nm                                 |
| Rotary field terminal inductance  | 12 mH                        | Voltage                                                | 24 V DC                                 |
| Customs info                      |                              | Power @20°C                                            | 12.0 W                                  |
| HS Code                           | 85015100                     | Current @20°C                                          | 0.50 A                                  |
|                                   |                              | Inertia                                                | 0.20 kgcm <sup>2</sup>                  |
|                                   |                              | Mass                                                   | 0.47 kg                                 |


**EGA201N00000800000**

M15, 9 poles, rotary


**Connector 1 (304)**

|           |          |
|-----------|----------|
| <b>A</b>  | U        |
| <b>B</b>  | V        |
| <b>C</b>  | W        |
| <b>PE</b> | PE       |
| <b>1</b>  | Brake+   |
| <b>2</b>  | Brake-   |
| <b>3</b>  | +Us/DSL+ |
| <b>4</b>  | GND/DSL- |

