

Engineering data (WIN 960)

DC bus voltage	320 V DC
Nominal AC voltage	220 V AC (rms)
Rated voltage	154 V AC (rms)
Rated power	518 W
Rated speed	4500 rpm
Rated torque	1.10 Nm
Rated current	2.94 A (rms)
Peak torque	3.45 Nm
Peak current	11.1 A (rms)
Stall torque	1.15 Nm
Stall current	2.53 A (rms)
No load speed	7940 rpm
EMF constant ±10%	27.5 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.45 Nm / A (rms)
Torque constant ±10% @ rated load	0.37 Nm / A (rms)
Number of poles	10
Electrical time constant	2.23 ms
Winding terminal resistance	5.37 Ω
Rotary field terminal inductance	12 mH

Customs info

HS Code	85015100
---------	----------


Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	1.39 ms
Thermal time constant	21 min
Rotor inertia	0.31 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	1.5 kg
Max. axial force 20kh	47 N
Max. radial force 20kh	247 N*
Max. axial force 100kh	27 N
Max. radial force 100kh	145 N*

* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EEM37 (HDSL) multi-turn, 17+12 bits

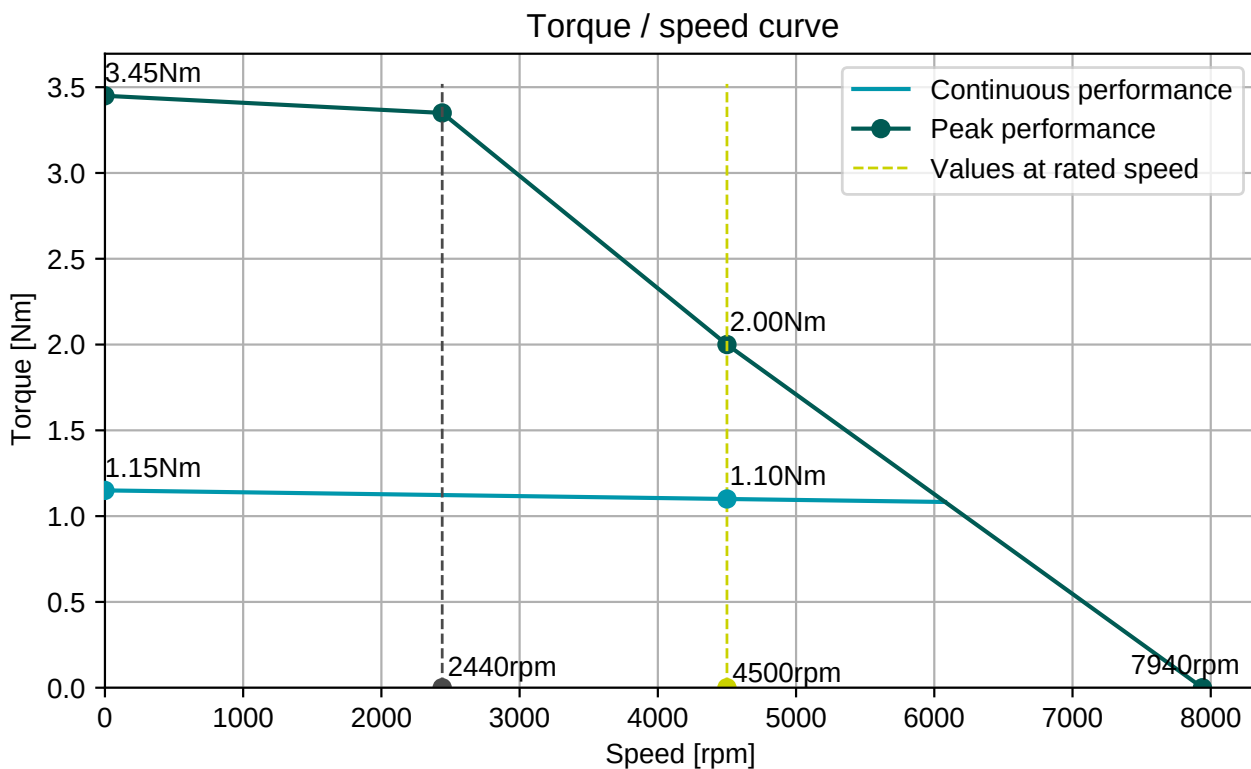

EGA201N00000800000

M15, 9 poles, rotary



Connector 1 (304)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-
3	+Us/DSL+
4	GND/DSL-

