



| Engineering data (WIN 711)        |                            | Mechanical data (setting 48)                           |                                       |
|-----------------------------------|----------------------------|--------------------------------------------------------|---------------------------------------|
| DC bus voltage                    | 560 V DC                   | Max mechanical speed                                   | 9000 rpm                              |
| Nominal AC voltage                | 380 V AC (rms)             | Mech. time constant                                    | 0.62 ms                               |
| Rated voltage                     | 277 V AC (rms)             | Thermal time constant                                  | 30 min                                |
| Rated power                       | 1.9 kW                     | Rotor inertia                                          | 3.26 kgcm <sup>2</sup>                |
| Rated speed                       | 3000 rpm                   | Protection                                             | IP64                                  |
| Rated torque                      | 6.10 Nm                    | Color                                                  | RAL 9005                              |
| Rated current                     | 5.14 A (rms)               | Cooling                                                | Convection                            |
| Peak torque                       | 22.5 Nm                    | Motor-only mass                                        | 4.7 kg                                |
| Peak current                      | 23.8 A (rms)               | Max. axial force 20kh                                  | 125 N                                 |
| Stall torque                      | 7.5 Nm                     | Max. radial force 20kh                                 | 660 N*                                |
| Stall current                     | 5.2 A (rms)                | Max. axial force 100kh                                 | 73 N                                  |
| No load speed                     | 4350 rpm                   | Max. radial force 100kh                                | 386 N*                                |
| EMF constant ±10%                 | 87 V AC (rms)<br>/ 1000rpm | * Defined for point of action at ½ output shaft length |                                       |
| Theoretical torque constant ±10%  | 1.44 Nm / A (rms)          | Sensors                                                |                                       |
| Torque constant ±10% @ rated load | 1.19 Nm / A (rms)          | Temperature                                            | PT1000 {PT1000}                       |
| Number of poles                   | 10                         | Feedback                                               | EKM36 (HDSL) multi-turn, 17 + 12 bits |
| Electrical time constant          | 5.90 ms                    | Brake                                                  |                                       |
| Winding terminal resistance       | 2.29 Ω                     | Braking torque                                         | 9.00 Nm                               |
| Rotary field terminal inductance  | 13.5 mH                    | Voltage                                                | 24 V DC                               |
| Power @20°C                       |                            | Current @20°C                                          | 0.75 A                                |
| Inertia                           |                            | Mass                                                   | 0.82 kg                               |
| Customs info                      |                            |                                                        |                                       |
| HS Code                           | 85015220                   |                                                        |                                       |

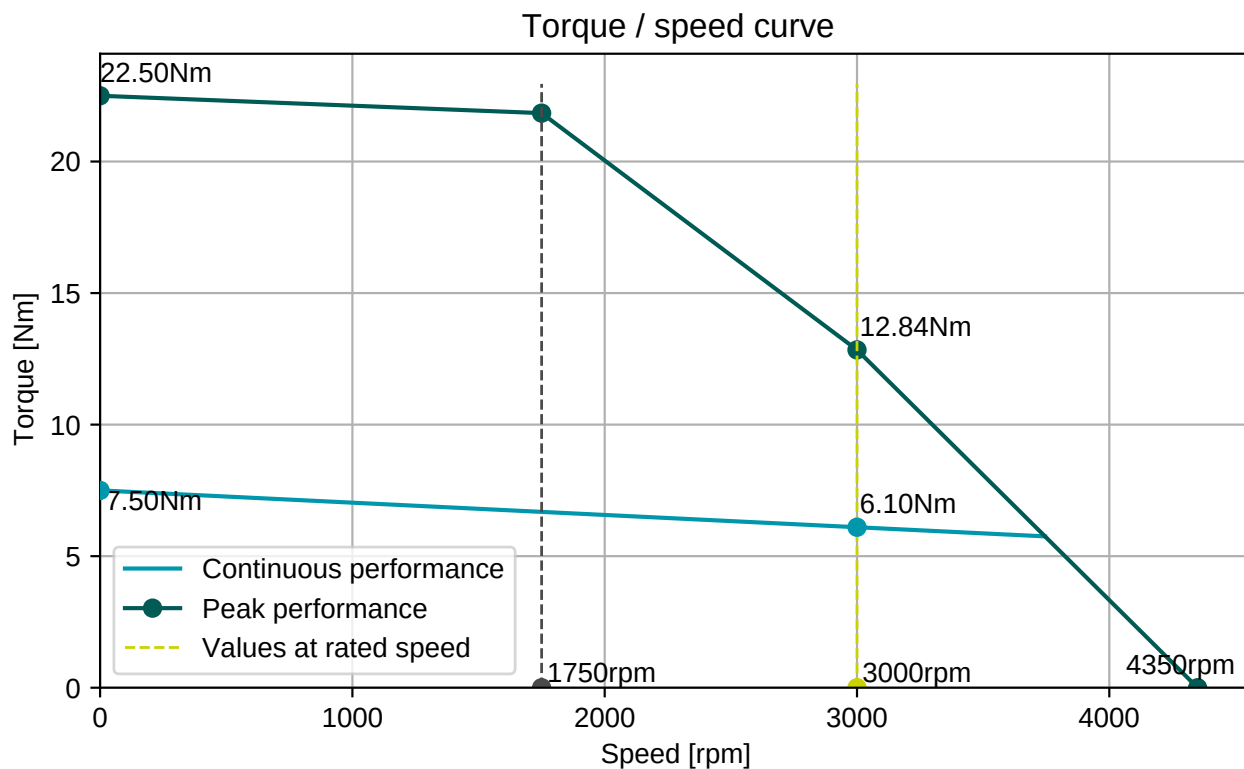

**BGC110N00001216000**

M23, 8 poles, rotary

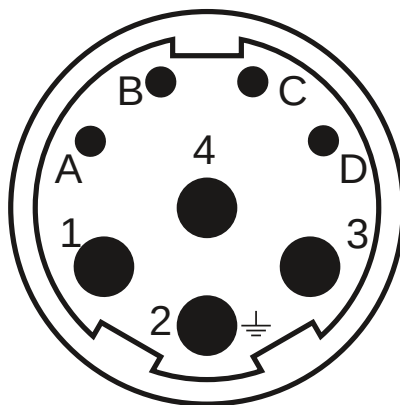

**Connector 1 (283)**

|          |          |
|----------|----------|
| <b>1</b> | U        |
| <b>4</b> | V        |
| <b>3</b> | W        |
| <b>2</b> | PE       |
| <b>A</b> | Brake+   |
| <b>B</b> | Brake-   |
| <b>C</b> | GND/DSL- |
| <b>D</b> | +Us/DSL+ |

