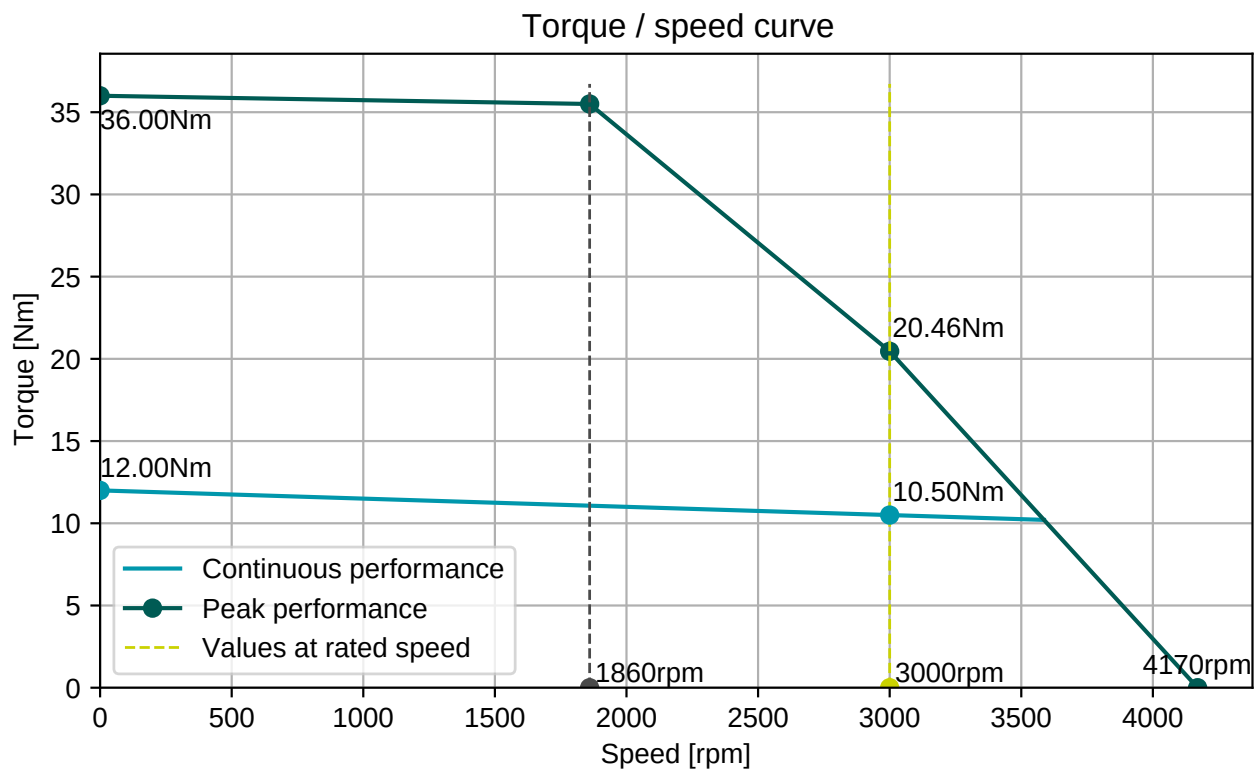


Engineering data (WIN 729)		Mechanical data (setting 48)	
DC bus voltage	560 V DC	Max mechanical speed	9000 rpm
Nominal AC voltage	380 V AC (rms)	Mech. time constant	0.80 ms
Rated voltage	291 V AC (rms)	Thermal time constant	45 min
Rated power	3.3 kW	Rotor inertia	7.9 kgcm ²
Rated speed	3000 rpm	Protection	IP64
Rated torque	10.50 Nm	Color	RAL 9005
Rated current	8.25 A (rms)	Cooling	Convection
Peak torque	36 Nm	Motor-only mass	11.2 kg
Peak current	29.4 A (rms)	Max. axial force 20kh	129 N
Stall torque	12 Nm	Max. radial force 20kh	681 N*
Stall current	8 A (rms)	Max. axial force 100kh	76 N
No load speed	4170 rpm	Max. radial force 100kh	398 N*
EMF constant ±10%	91 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length	
Theoretical torque constant ±10%	1.51 Nm / A (rms)		
Torque constant ±10% @ rated load	1.27 Nm / A (rms)		
Number of poles	10	Sensors	
Electrical time constant	8.20 ms	Temperature	PT1000 {PT1000}
Winding terminal resistance	1.33 Ω	Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2
Rotary field terminal inductance	10.9 mH	Brake	
Customs info		Braking torque	18.00 Nm
HS Code	85015220	Voltage	24 V DC
		Power @20°C	24.0 W
		Current @20°C	1.00 A
		Inertia	2.00 kgcm ²
		Mass	1.80 kg


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

