

Engineering data (WIN 932)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	269 V AC (rms)
Rated power	5.3 kW
Rated speed	3000 rpm
Rated torque	17.00 Nm
Rated current	13.81 A (rms)
Peak torque	72 Nm
Peak current	59.6 A (rms)
Stall torque	24 Nm
Stall current	15.3 A (rms)
No load speed	4000 rpm
EMF constant ±10%	95 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.57 Nm / A (rms)
Torque constant ±10% @ rated load	1.23 Nm / A (rms)
Number of poles	10
Electrical time constant	13.41 ms
Winding terminal resistance	0.41 Ω
Rotary field terminal inductance	5.5 mH

Customs info

HS Code	85015220
---------	----------

Mechanical data (setting 48)

Max mechanical speed	6000 rpm
Mech. time constant	0.74 ms
Thermal time constant	47 min
Rotor inertia	25.6 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	9.2 kg
Max. axial force 20kh	136 N
Max. radial force 20kh	718 N*
Max. axial force 100kh	80 N
Max. radial force 100kh	420 N*

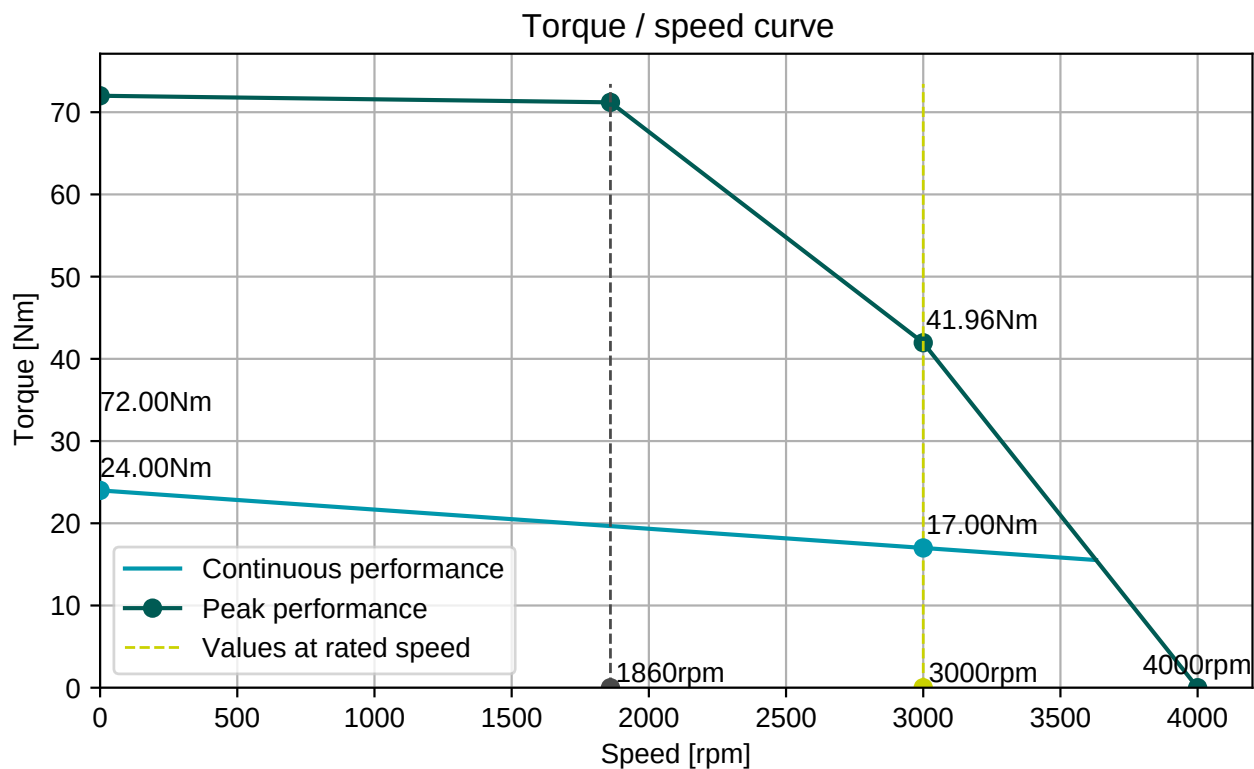
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 17 + 12 bits

Brake

Braking torque	36.00 Nm
Voltage	24 V DC
Power @20°C	26.0 W
Current @20°C	1.08 A
Inertia	6.20 kgcm ²
Mass	2.85 kg


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

