

Engineering data (WIN 933)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	267 V AC (rms)
Rated power	9.4 kW
Rated speed	3000 rpm
Rated torque	30.00 Nm
Rated current	24.35 A (rms)
Peak torque	132 Nm
Peak current	101.6 A (rms)
Stall torque	44 Nm
Stall current	28.3 A (rms)
No load speed	4040 rpm
EMF constant ±10%	94 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.55 Nm / A (rms)
Torque constant ±10% @ rated load	1.23 Nm / A (rms)
Number of poles	10
Electrical time constant	14.74 ms
Winding terminal resistance	0.19 Ω
Rotary field terminal inductance	2.8 mH

Customs info

HS Code	85015230
---------	----------

Mechanical data (setting 48)

Max mechanical speed	6000 rpm
Mech. time constant	0.64 ms
Thermal time constant	62 min
Rotor inertia	47 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	25 kg
Max. axial force 20kh	64 N
Max. radial force 20kh	335 N*
Max. axial force 100kh	37 N
Max. radial force 100kh	196 N*

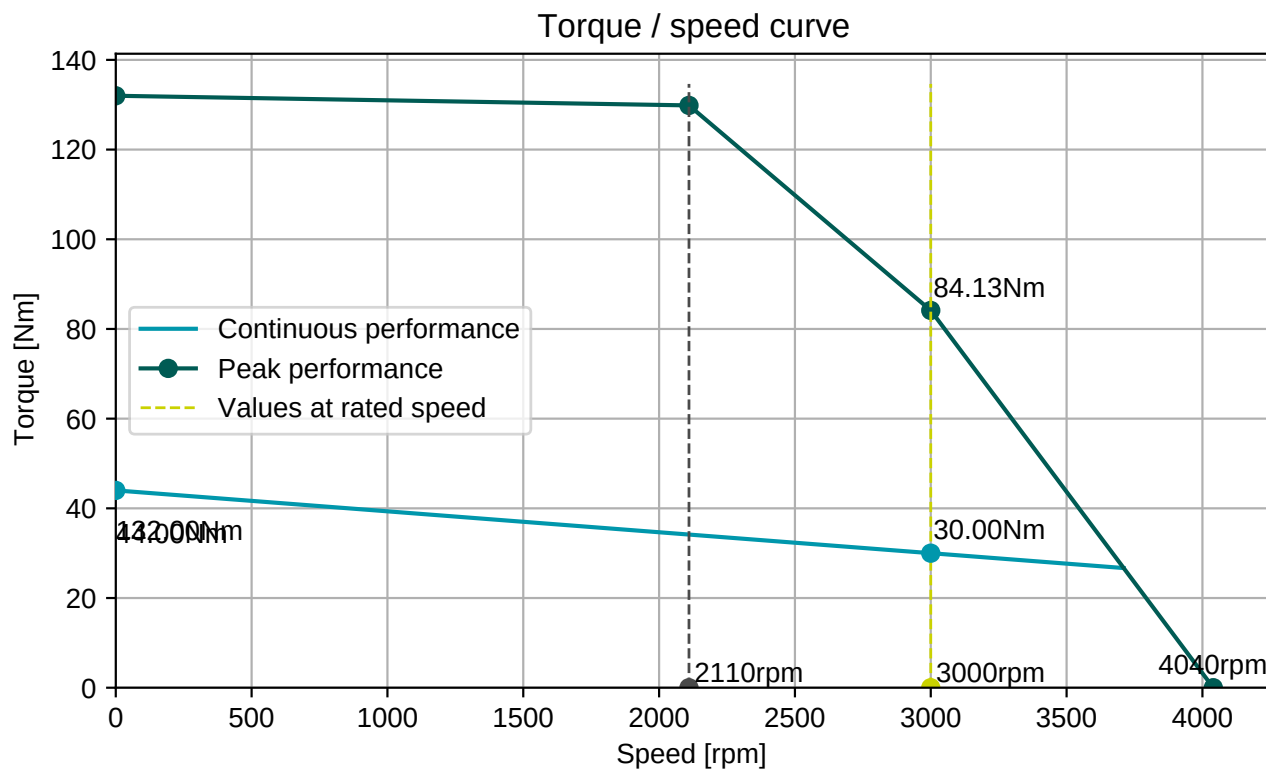
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EDS35 (HDSL) single-turn, 24 bits

Brake

Braking torque	36.00 Nm
Voltage	24 V DC
Power @20°C	26.0 W
Current @20°C	1.08 A
Inertia	6.20 kgcm ²
Mass	2.85 kg


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

