

Engineering data (WIN 861)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	333 V AC (rms)
Rated power	7.2 kW
Rated speed	3000 rpm
Rated torque	23.00 Nm
Rated current	15.52 A (rms)
Peak torque	85 Nm
Peak current	57.7 A (rms)
Stall torque	30 Nm
Stall current	16.3 A (rms)
No load speed	3420 rpm
EMF constant ±10%	111 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.84 Nm / A (rms)
Torque constant ±10% @ rated load	1.48 Nm / A (rms)
Number of poles	10
Electrical time constant	15.61 ms
Winding terminal resistance	0.41 Ω
Rotary field terminal inductance	6.4 mH

Customs info

HS Code	85015220
---------	----------

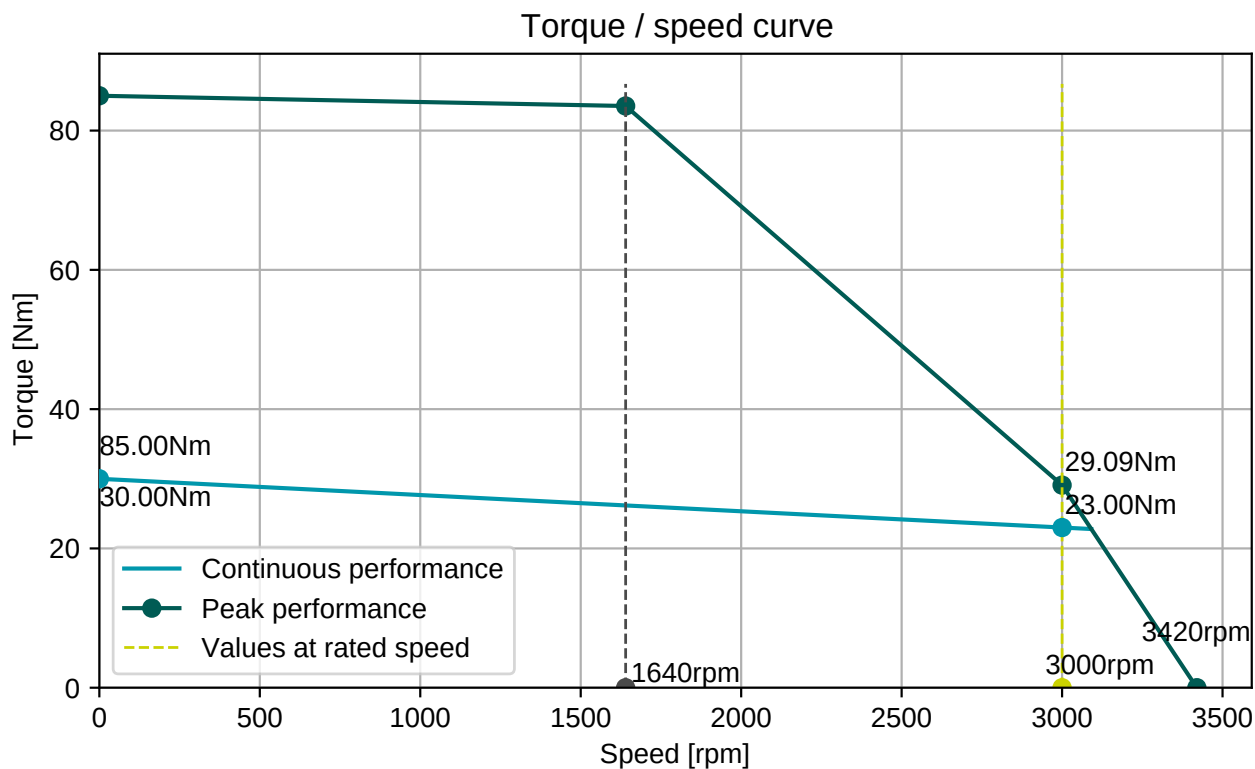
Mechanical data (setting 48)

Max mechanical speed	6000 rpm
Mech. time constant	1.04 ms
Thermal time constant	80 min
Rotor inertia	49.5 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	18.5 kg
Max. axial force 20kh	231 N
Max. radial force 20kh	1214 N*
Max. axial force 100kh	135 N
Max. radial force 100kh	710 N*

** Defined for point of action at ½ output shaft length*

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

