


Engineering data (WIN 833)		Mechanical data (setting 48)	
DC bus voltage	560 V DC	Max mechanical speed	6000 rpm
Nominal AC voltage	380 V AC (rms)	Mech. time constant	0.88 ms
Rated voltage	257 V AC (rms)	Thermal time constant	90 min
Rated power	7.9 kW	Rotor inertia	69 kgcm ²
Rated speed	3000 rpm	Protection	IP64
Rated torque	25.00 Nm	Color	RAL 9005
Rated current	20.1 A (rms)	Cooling	Convection
Peak torque	120 Nm	Motor-only mass	23.2 kg
Peak current	90.2 A (rms)	Max. axial force 20kh	263 N
Stall torque	40 Nm	Max. radial force 20kh	1384 N*
Stall current	26.3 A (rms)	Max. axial force 100kh	154 N
No load speed	4130 rpm	Max. radial force 100kh	810 N*
EMF constant ±10%	92 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length	
Theoretical torque constant ±10%	1.52 Nm / A (rms)	Sensors	
Torque constant ±10% @ rated load	1.24 Nm / A (rms)	Temperature	PT1000 {PT1000}
Number of poles	10	Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2
Electrical time constant	18.24 ms	Brake	
Winding terminal resistance	0.17 Ω	Braking torque	36.00 Nm
Rotary field terminal inductance	3.1 mH	Voltage	24 V DC
Customs info		Power @20°C	26.0 W
HS Code	85015230	Current @20°C	1.08 A
		Inertia	6.20 kgcm ²
		Mass	2.85 kg



BGC110N00001216000

M23, 8 poles, rotary

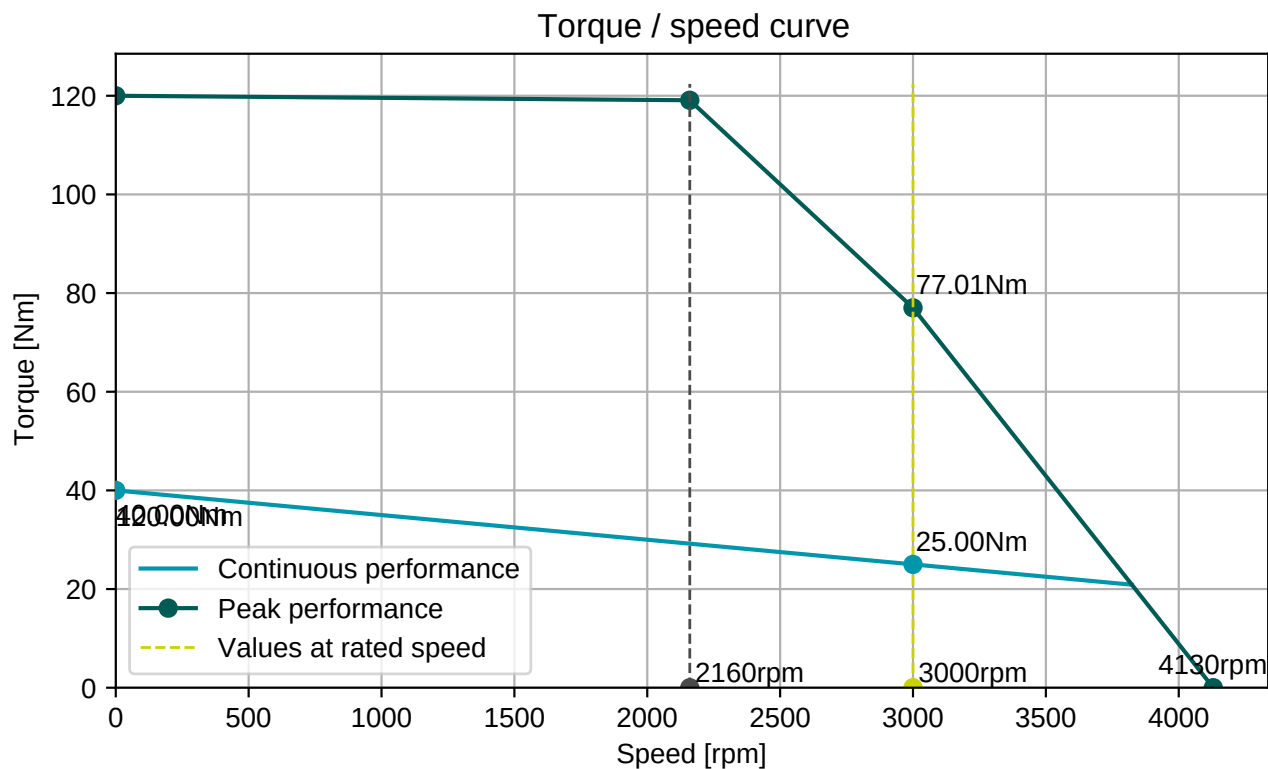

Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

