

Engineering data (WIN 1165)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	349 V AC (rms)
Rated power	8.6 kW
Rated speed	3000 rpm
Rated torque	27.30 Nm
Rated current	16.18 A (rms)
Peak torque	180 Nm
Peak current	101.8 A (rms)
Stall torque	60 Nm
Stall current	30 A (rms)
No load speed	3140 rpm
EMF constant ±10%	125 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	2.067 Nm / A (rms)
Torque constant ±10% @ rated load	1.687 Nm / A (rms)
Number of poles	10
Electrical time constant	18.75 ms
Winding terminal resistance	0.16 Ω
Rotary field terminal inductance	3 mH

Customs info

HS Code	85015230
---------	----------

Mechanical data (setting 48)

Max mechanical speed	6000 rpm
Mech. time constant	0.69 ms
Thermal time constant	108 min
Rotor inertia	107 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	33.5 kg
Max. axial force 20kh	274 N
Max. radial force 20kh	1443 N*
Max. axial force 100kh	160 N
Max. radial force 100kh	844 N*

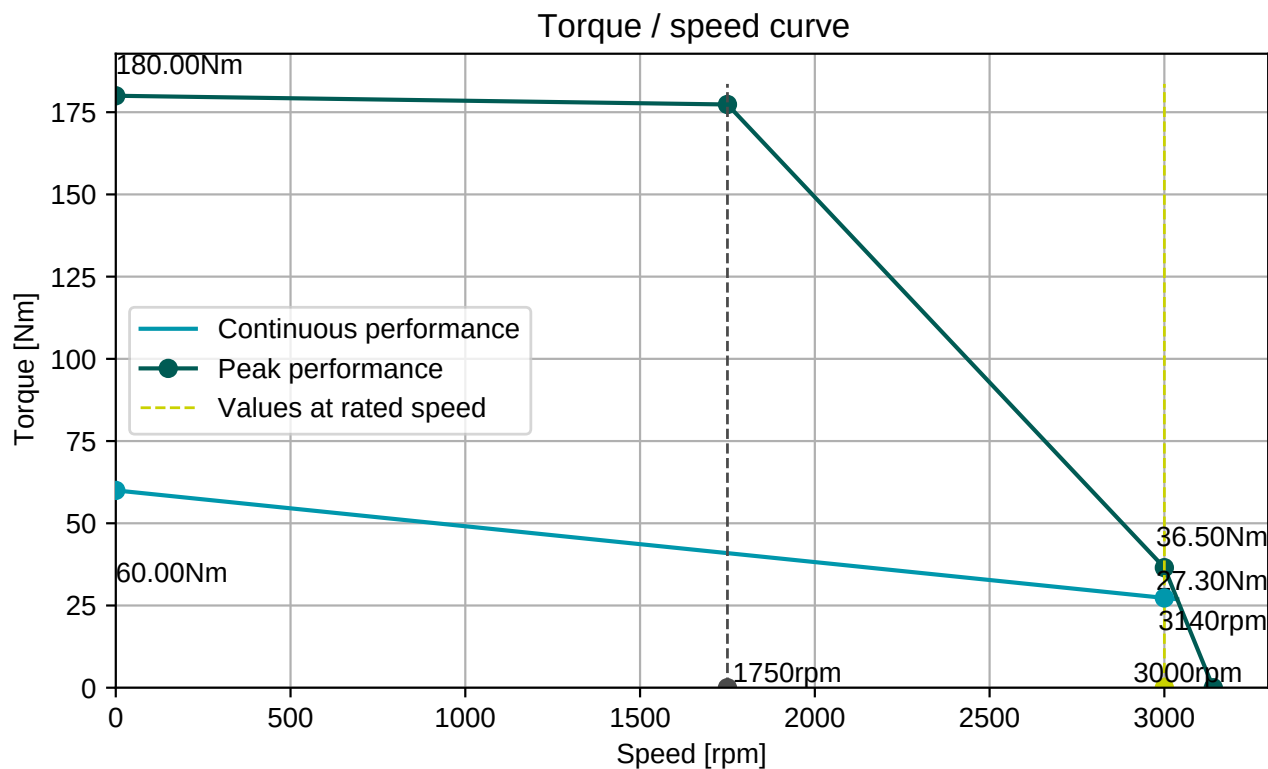
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2

Brake

Braking torque	36.00 Nm
Voltage	24 V DC
Power @20°C	26.0 W
Current @20°C	1.08 A
Inertia	6.20 kgcm ²
Mass	2.85 kg


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

