

Engineering data (WIN 1531)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	297 V AC (rms)
Rated power	539 W
Rated speed	5000 rpm
Rated torque	1.03 Nm
Rated current	1.25 A (rms)
Peak torque	6.65 Nm
Peak current	7.8 A (rms)
Stall torque	1.75 Nm
Stall current	1.76 A (rms)
No load speed	6310 rpm
EMF constant ±10%	60 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.992 Nm / A (rms)
Torque constant ±10% @ rated load	0.824 Nm / A (rms)
Number of poles	10
Electrical time constant	1.43 ms
Winding terminal resistance	11.596 Ω
Rotary field terminal inductance	16.6 mH

Customs info

HS Code	85015100
---------	----------

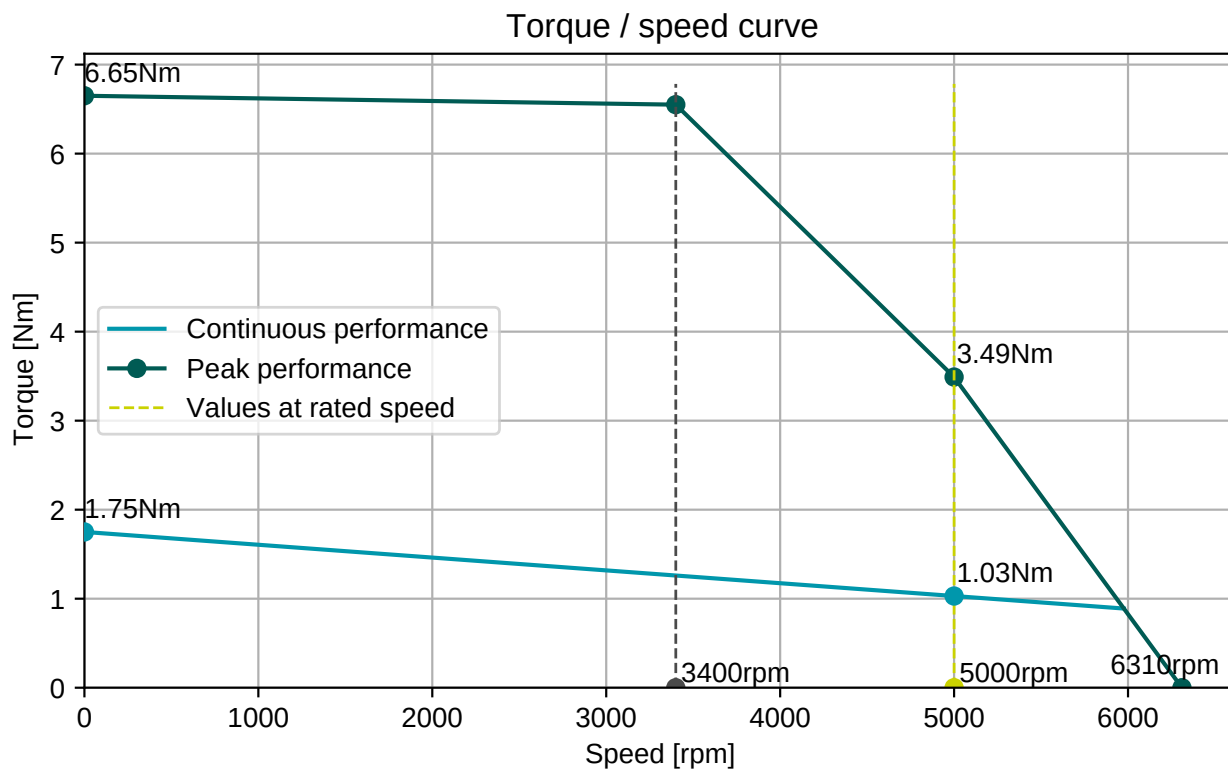
Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	1.39 ms
Thermal time constant	28 min
Rotor inertia	0.68 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	1.9 kg
Max. axial force 20kh	52 N
Max. radial force 20kh	276 N*
Max. axial force 100kh	31 N
Max. radial force 100kh	161 N*

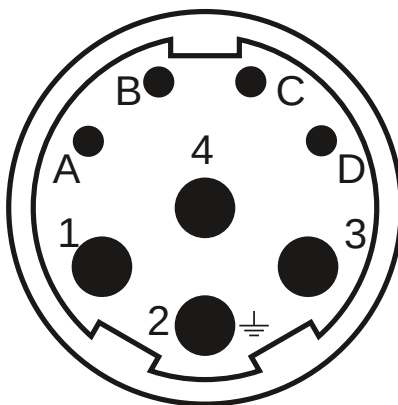
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKS36 (HDSL) single-turn, 18 bits, SIL2


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

