

Engineering data (WIN 783)

DC bus voltage	36 V DC
Nominal AC voltage	25 V AC (rms)
Rated voltage	18 V AC (rms)
Rated power	209 W
Rated speed	1000 rpm
Rated torque	2.00 Nm
Rated current	11.02 A (rms)
Peak torque	6.15 Nm
Peak current	41.9 A (rms)
Stall torque	2.05 Nm
Stall current	10.3 A (rms)
No load speed	2060 rpm
EMF constant ±10%	12 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.2 Nm / A (rms)
Torque constant ±10% @ rated load	0.2 Nm / A (rms)
Number of poles	10
Electrical time constant	2.44 ms
Winding terminal resistance	0.41 Ω
Rotary field terminal inductance	1 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 5)

Max mechanical speed	12000 rpm
Mech. time constant	0.99 ms
Thermal time constant	23 min
Rotor inertia	0.55 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	2.5 kg
Max. axial force 20kh	92 N
Max. radial force 20kh	484 N*
Max. axial force 100kh	54 N
Max. radial force 100kh	283 N*

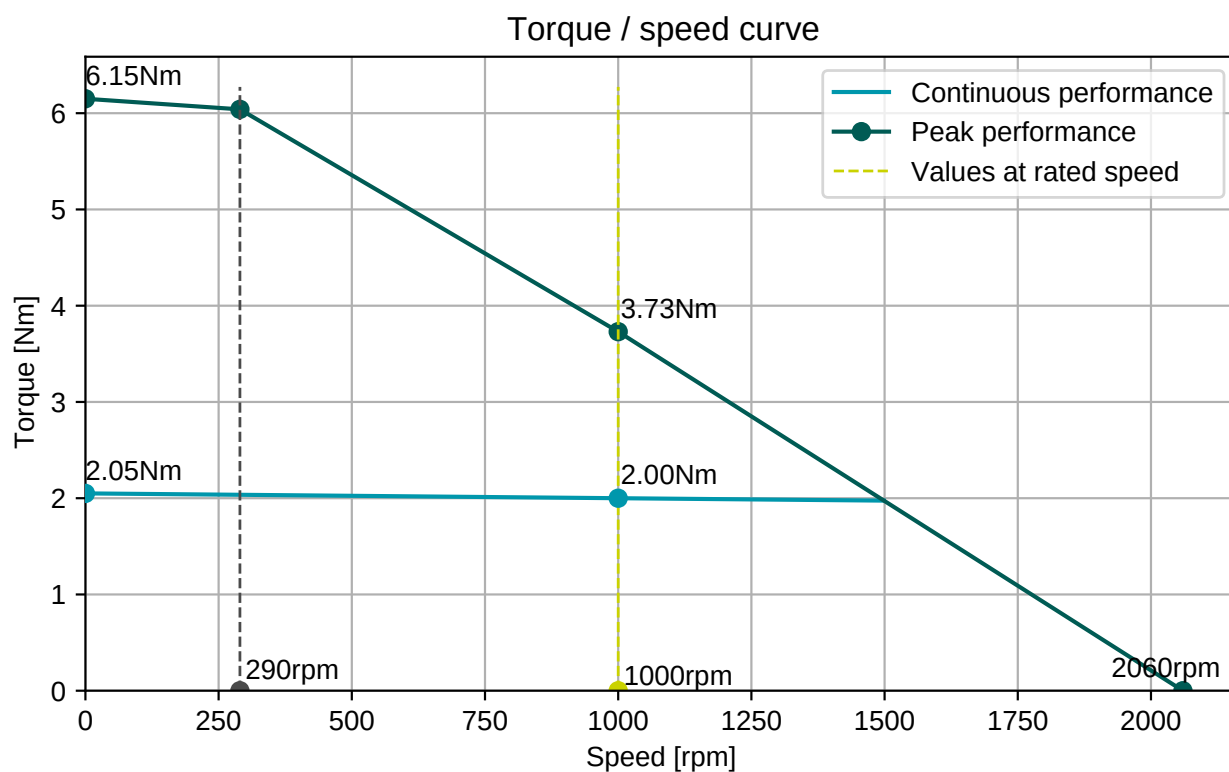
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Brake

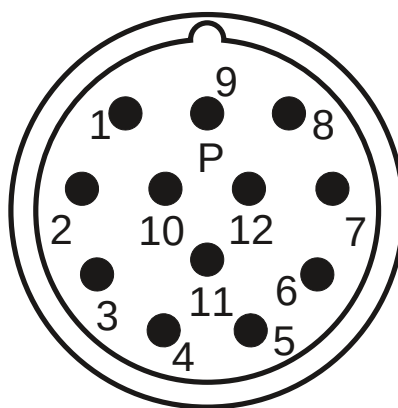
Braking torque	4.50 Nm
Voltage	24 V DC
Power @20°C	12.0 W
Current @20°C	0.50 A
Inertia	0.20 kgcm ²
Mass	0.47 kg


BGC110N00001216000

M23, 8 poles, rotary


AGC052N00001215000

M23, 12 poles, rotary


Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (10)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

