

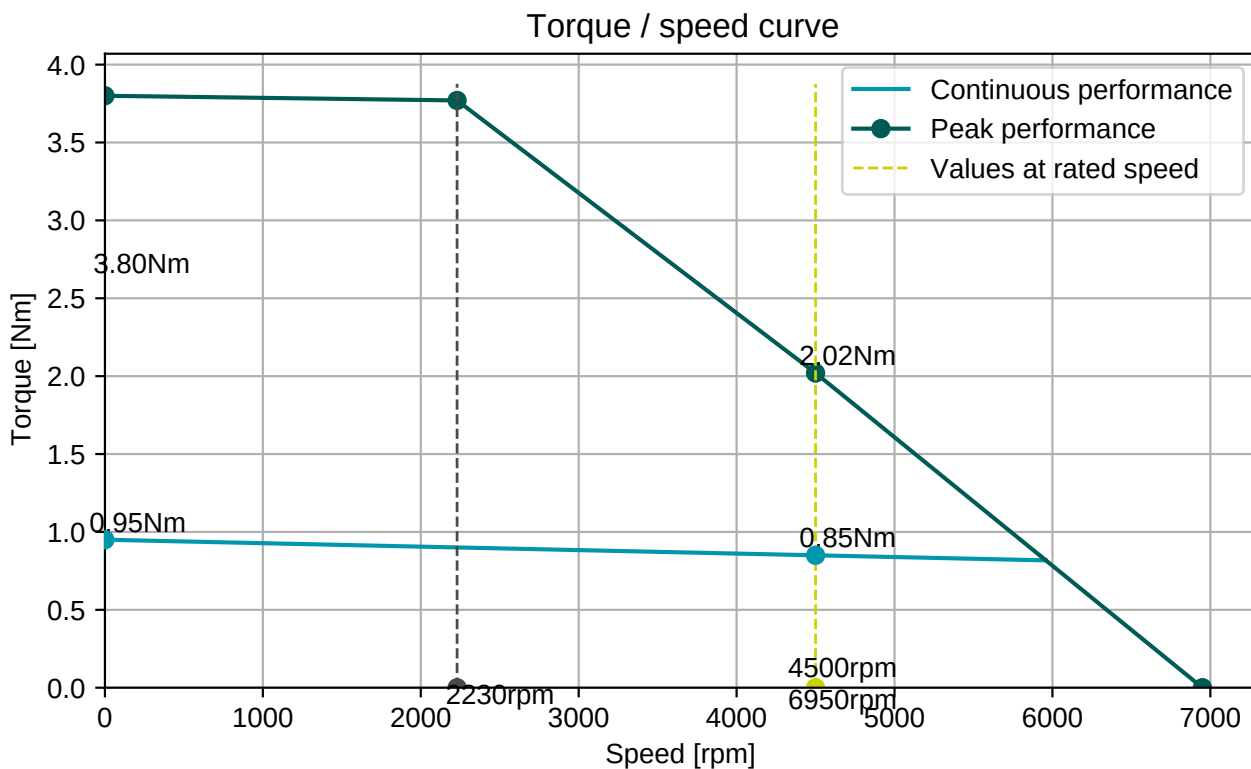


Engineering data (WIN 745)		Mechanical data (setting 5)	
DC bus voltage	320 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	220 V AC (rms)	Mech. time constant	0.92 ms
Rated voltage	172 V AC (rms)	Thermal time constant	18 min
Rated power	401 W	Rotor inertia	0.11 kgcm ²
Rated speed	4500 rpm	Protection	IP64
Rated torque	0.85 Nm	Color	RAL 9005
Rated current	1.7 A (rms)	Cooling	Convection
Peak torque	3.8 Nm	Motor-only mass	1.7 kg
Peak current	8.4 A (rms)	Max. axial force 20kh	44 N
Stall torque	0.95 Nm	Max. radial force 20kh	230 N*
Stall current	1.82 A (rms)	Max. axial force 100kh	26 N
No load speed	6950 rpm	Max. radial force 100kh	135 N*
EMF constant ±10%	31.5 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length	
Theoretical torque constant ±10%	0.52 Nm / A (rms)		
Torque constant ±10% @ rated load	0.50 Nm / A (rms)		
Number of poles	6		
Electrical time constant	1.46 ms		
Winding terminal resistance	13.05 Ω		
Rotary field terminal inductance	19 mH		
Customs info		Sensors	
HS Code	85015100	Temperature	PT1000 {PT1000}
		Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)
		Brake	
		Braking torque	2.00 Nm
		Voltage	24 V DC
		Power @20°C	11.0 W
		Current @20°C	0.46 A
		Inertia	0.08 kgcm ²
		Mass	0.20 kg

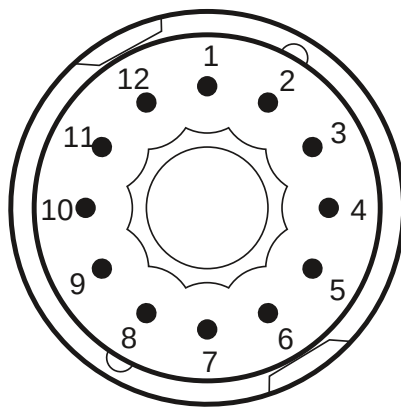

EGA101N00000001000
 2x M15, 9 and 12 poles rotary

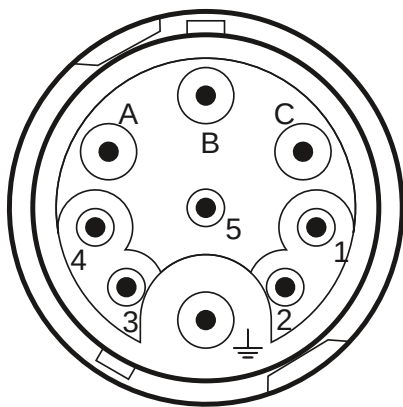

Connector 1 (226)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (227)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

