

Engineering data (WIN 887)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	118 V AC (rms)
Rated power	118 W
Rated speed	4500 rpm
Rated torque	0.25 Nm
Rated current	0.96 A (rms)
Peak torque	1.12 Nm
Peak current	4.4 A (rms)
Stall torque	0.28 Nm
Stall current	0.97 A (rms)
No load speed	21170 rpm
EMF constant ±10%	17.5 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.29 Nm / A (rms)
Torque constant ±10% @ rated load	0.26 Nm / A (rms)
Number of poles	6
Electrical time constant	1.00 ms
Winding terminal resistance	26.9 Ω
Rotary field terminal inductance	26.8 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 5)

Max mechanical speed	12000 rpm
Mech. time constant	2.78 ms
Thermal time constant	10 min
Rotor inertia	0.05 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	1.2 kg
Max. axial force 20kh	41 N
Max. radial force 20kh	216 N*
Max. axial force 100kh	24 N
Max. radial force 100kh	126 N*


* Defined for point of action at ½ output shaft length

Sensors



Temperature	PT1000 {PT1000}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Brake

Braking torque	2.00 Nm
Voltage	24 V DC
Power @20°C	11.0 W
Current @20°C	0.46 A
Inertia	0.08 kgcm ²
Mass	0.20 kg

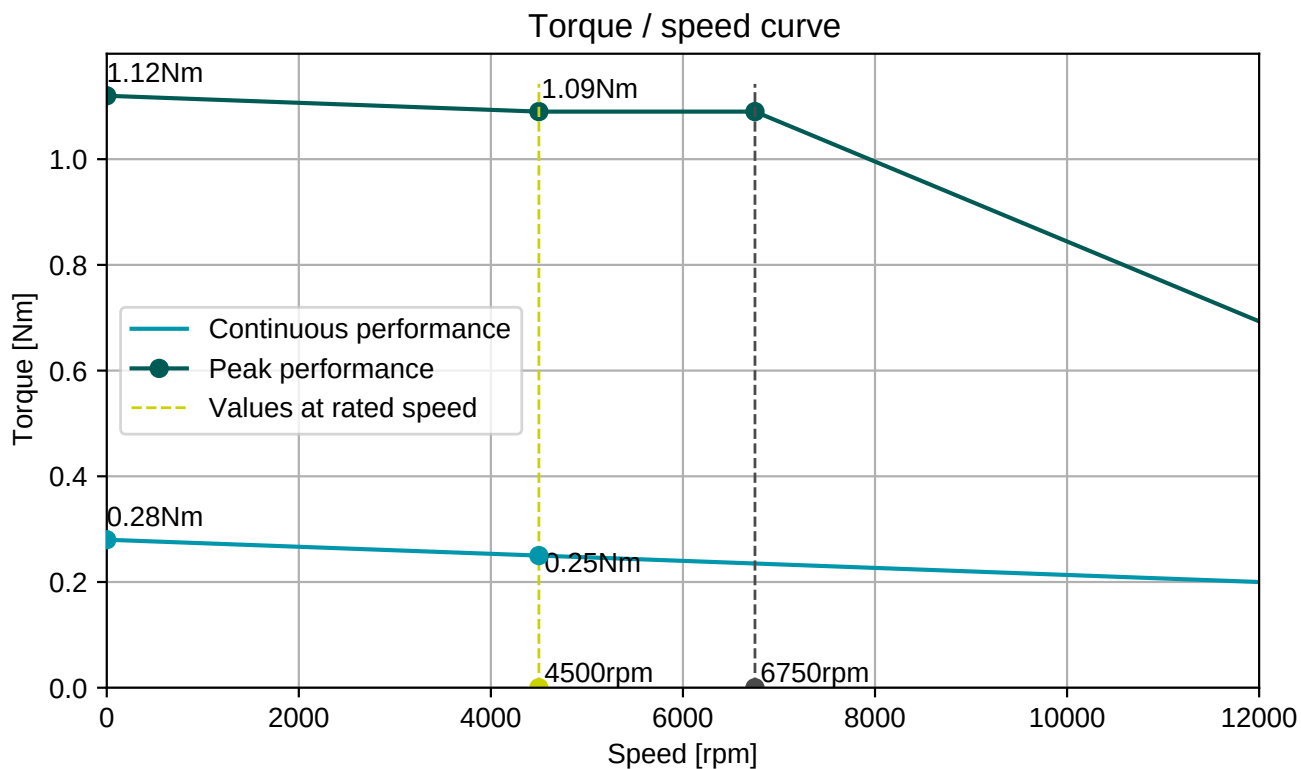

EGA101N00000001000
 2x M15, 9 and 12 poles rotary

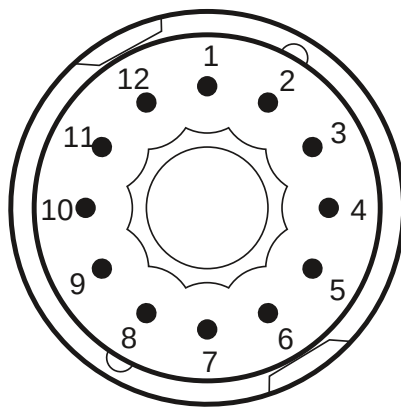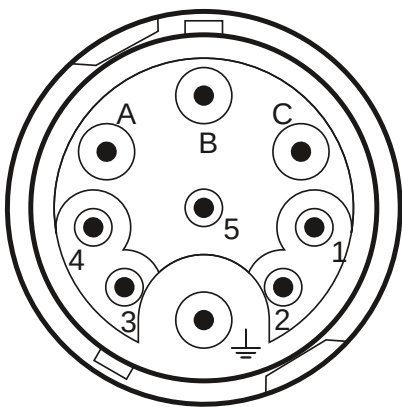

Connector 1 (226)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (227)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

