

Engineering data (WIN 707)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	278 V AC (rms)
Rated power	942 W
Rated speed	3000 rpm
Rated torque	3.00 Nm
Rated current	2.42 A (rms)
Peak torque	10.5 Nm
Peak current	10.9 A (rms)
Stall torque	3.5 Nm
Stall current	2.38 A (rms)
No load speed	4260 rpm
EMF constant ±10%	89 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.47 Nm / A (rms)
Torque constant ±10% @ rated load	1.24 Nm / A (rms)
Number of poles	10
Electrical time constant	2.87 ms
Winding terminal resistance	8.89 Ω
Rotary field terminal inductance	25.5 mH

Customs info

HS Code	85015220
---------	----------

Mechanical data (setting 5)

Max mechanical speed	12000 rpm
Mech. time constant	0.74 ms
Thermal time constant	27 min
Rotor inertia	1.04 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	3.4 kg
Max. axial force 20kh	68 N
Max. radial force 20kh	360 N*
Max. axial force 100kh	40 N
Max. radial force 100kh	211 N*


* Defined for point of action at ½ output shaft length

Sensors



Temperature	PT1000 {PT1000}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Brake

Braking torque	4.50 Nm
Voltage	24 V DC
Power @20°C	12.0 W
Current @20°C	0.50 A
Inertia	0.20 kgcm ²
Mass	0.47 kg

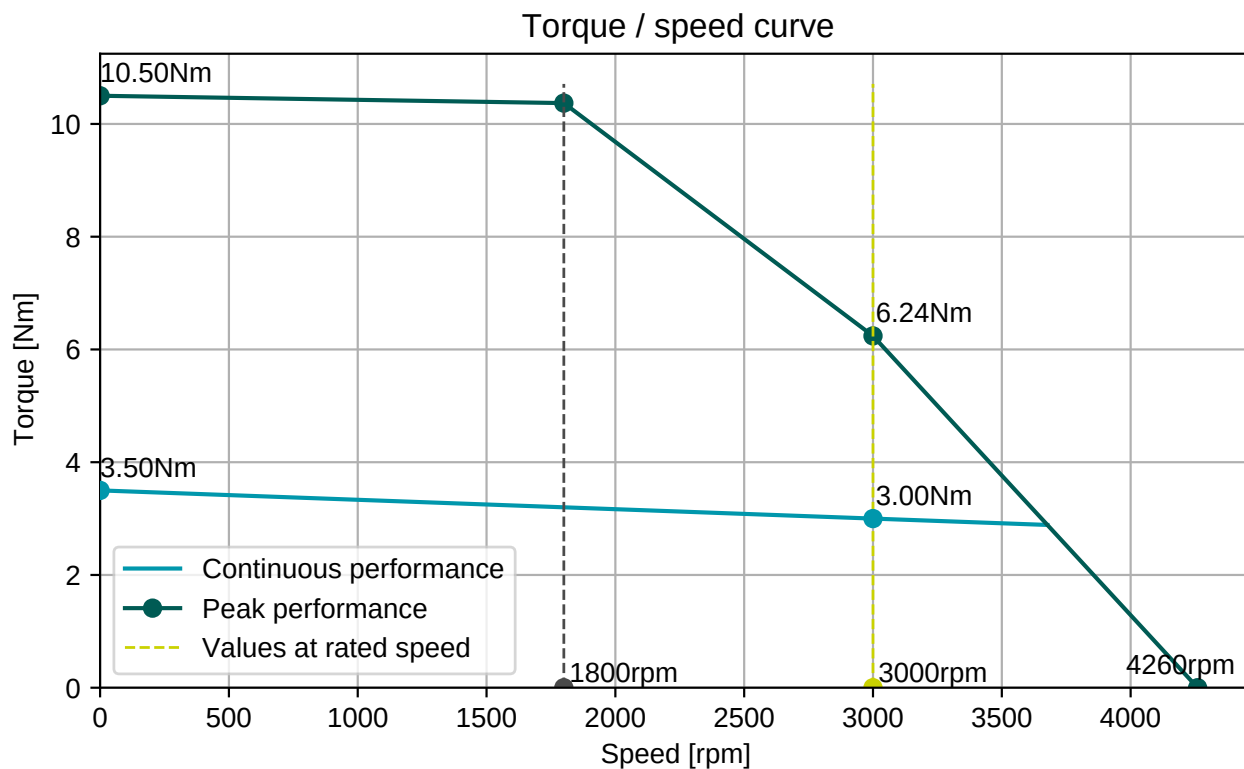

EGA101N00000001000
 2x M15, 9 and 12 poles rotary

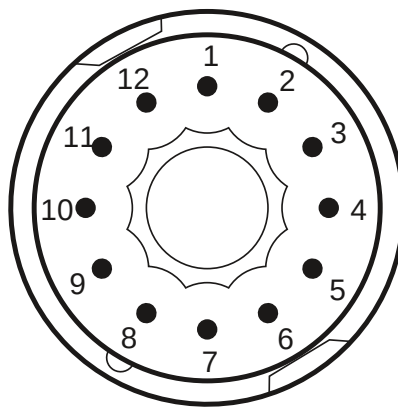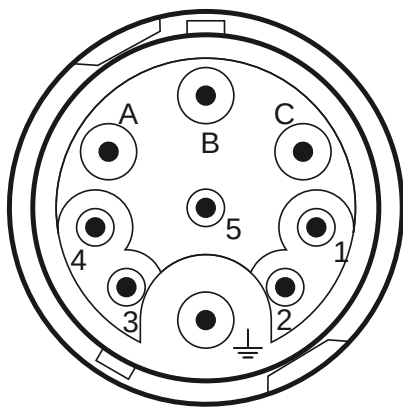

Connector 1 (226)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (227)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

