



Engineering data (WIN 266)		Mechanical data (setting 5)	
DC bus voltage	560 V DC	Max mechanical speed	3600 rpm
Nominal AC voltage	330 V AC (rms)	Mech. time constant	0.94 ms
Rated voltage	312 V AC (rms)	Thermal time constant	47 min
Rated power	7.1 kW	Rotor inertia	76.1 kgcm ²
Rated speed	2000 rpm	Protection	IP64
Rated torque	34.00 Nm	Color	RAL 9005
Rated current	15.3 A (rms)	Cooling	Convection
Peak torque	120 Nm	Motor-only mass	51 kg
Peak current	65 A (rms)	Max. axial force 20kh	396 N
Stall torque	40 Nm	Max. radial force 20kh	2082 N*
Stall current	16.7 A (rms)	Max. axial force 100kh	231 N
No load speed	2270 rpm	Max. radial force 100kh	1217 N*
EMF constant ±10%	145 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length	
Theoretical torque constant ±10%	2.4 Nm / A (rms)		
Torque constant ±10% @ rated load	2.2 Nm / A (rms)		
Number of poles	6	Sensors	
Electrical time constant	23.90 ms	Temperature	PT1000 {PT1000}
Winding terminal resistance	0.41 Ω	Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)
Rotary field terminal inductance	9.8 mH	Brake	
Customs info		Braking torque	145.00 Nm
HS Code	85015220	Voltage	24 V DC
		Power @20°C	50.0 W
		Current @20°C	2.08 A
		Inertia	56.00 kgcm ²
		Mass	9.50 kg

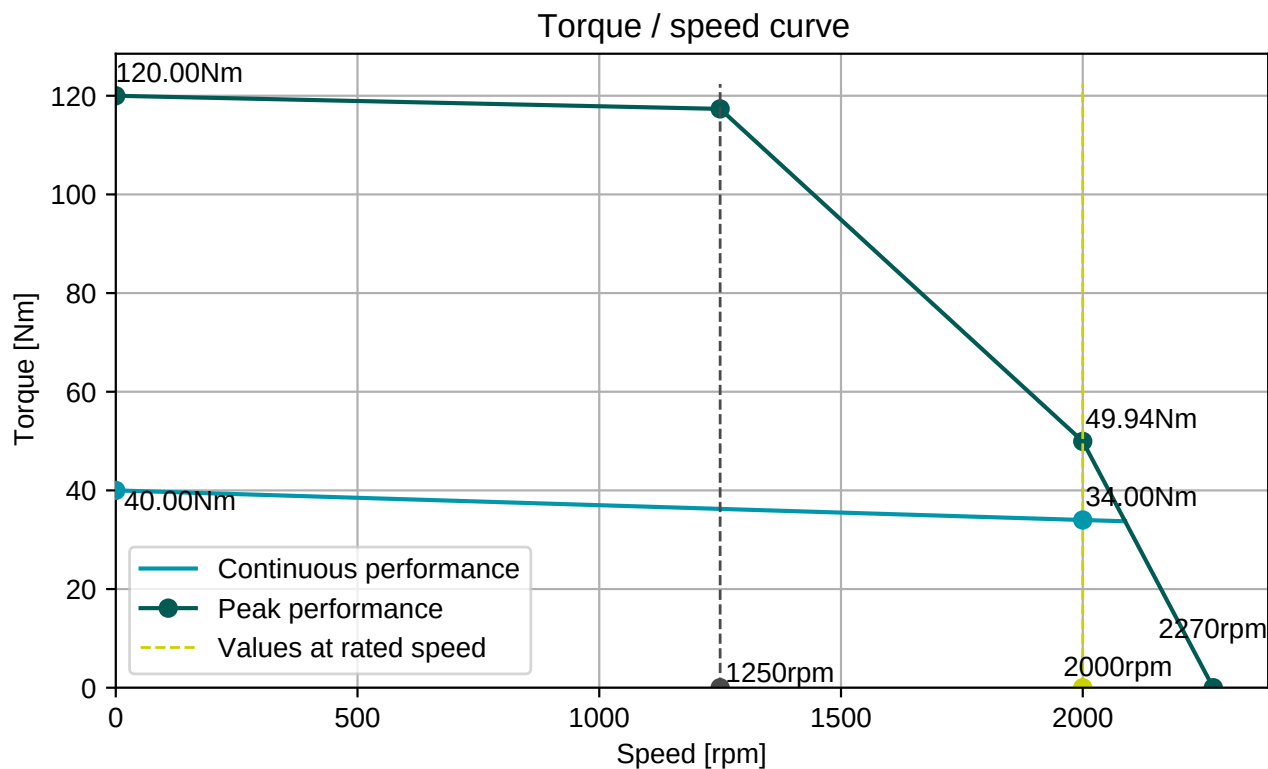


CEA271N00000051000

M40, 8 poles, straight

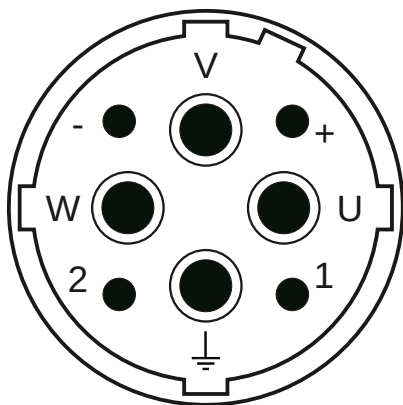

AEA052N000000201000

M23, 12 poles, straight


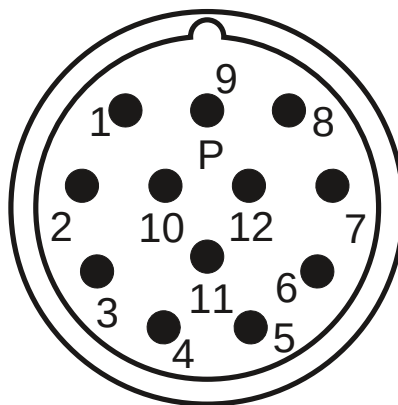


Connector 1 (151)

U	U
V	V
W	W
PE	PE
+	Brake+
-	Brake-
1	Therm+
2	Therm-

Connector 2 (10)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

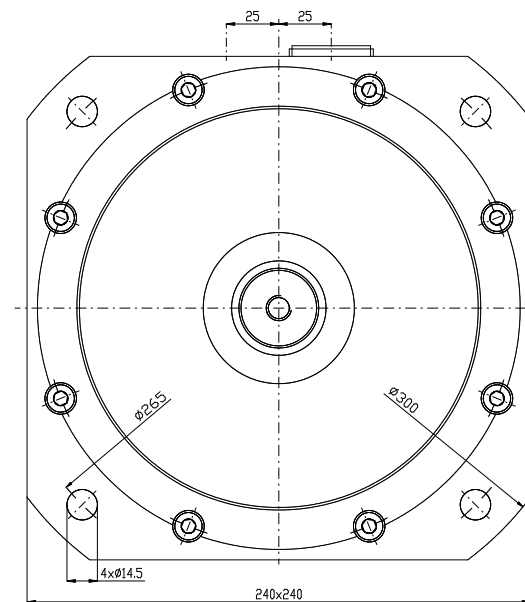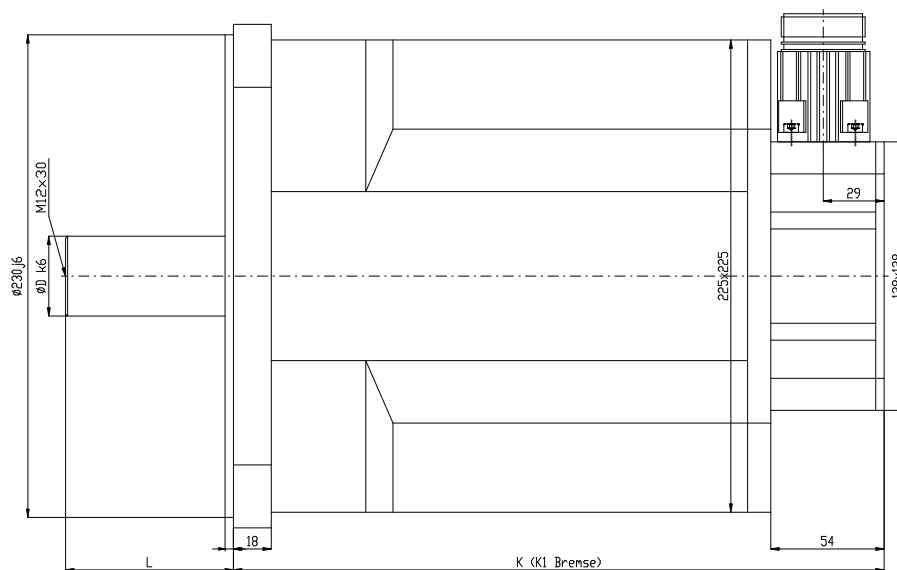

TYP	ØD	L	K	K1
T8-400	Ø38	80	310	378
T8-680	Ø38	80	378	446
T8-930	Ø42	110	446	514
T8-1150	Ø42	110	514	582

INDEX	ZMĚNA	DATUM	PODPIS	
ZN.MAT.				T.O.
ROZM.-POLOIT.				HMDTNDST kg
PDM. ZAR.				MEŘ.
VYPR.	NORM.REF.	POZN.	ČSN	TRČ.
PŘEZK.			POZN.	Č. KUSOVNIKU
TECHNOL.	SCHVÁLIL	29.5.2006	STARÝ V.	Č.V.
NÁZEV	Motor T8			T8000 00 Z
			Listů	List