Engineering data (WIN 1199)		
DC bus voltage	24	V DC
Nominal AC voltage	15	V AC (rms)
Rated voltage	12	V AC (rms)
Rated power	57	W
Rated speed	6000	rpm
Rated torque	0.09	Nm
Rated current	4.03	A (rms)
Peak torque	0.4	Nm
Peak current	17.7	A (rms)
Stall torque	0.1	Nm
Stall current	4.11	A (rms)
No load speed	9990	rpm
EMF constant ±10%	1.5	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.02	Nm / A (rms)
Torque constant ±10% @ rated load	0.02	Nm / A (rms)
Number of poles	6	
Electrical time constant	0.31	ms
Winding terminal resistance	0.64	Ω
Rotary field terminal inductance	0.2	mH


Customs info	
HS Code	85015100

Mechanical data (setting 5)		
Max mechanical speed	12000	rpm
Mech. time constant	4.32	ms
Thermal time constant	18	min
Rotor inertia	0.024	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	0.5	kg

Sensors	
Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Feedback	2-pole resolver size 10


Brake		
Braking torque	0.40	Nm
Voltage	24	V DC
Power @20°C	8.0	W
Current @20°C	0.33	A
Inertia	0.02	kgcm²
Mass	0.10	kg


Torque / speed curve

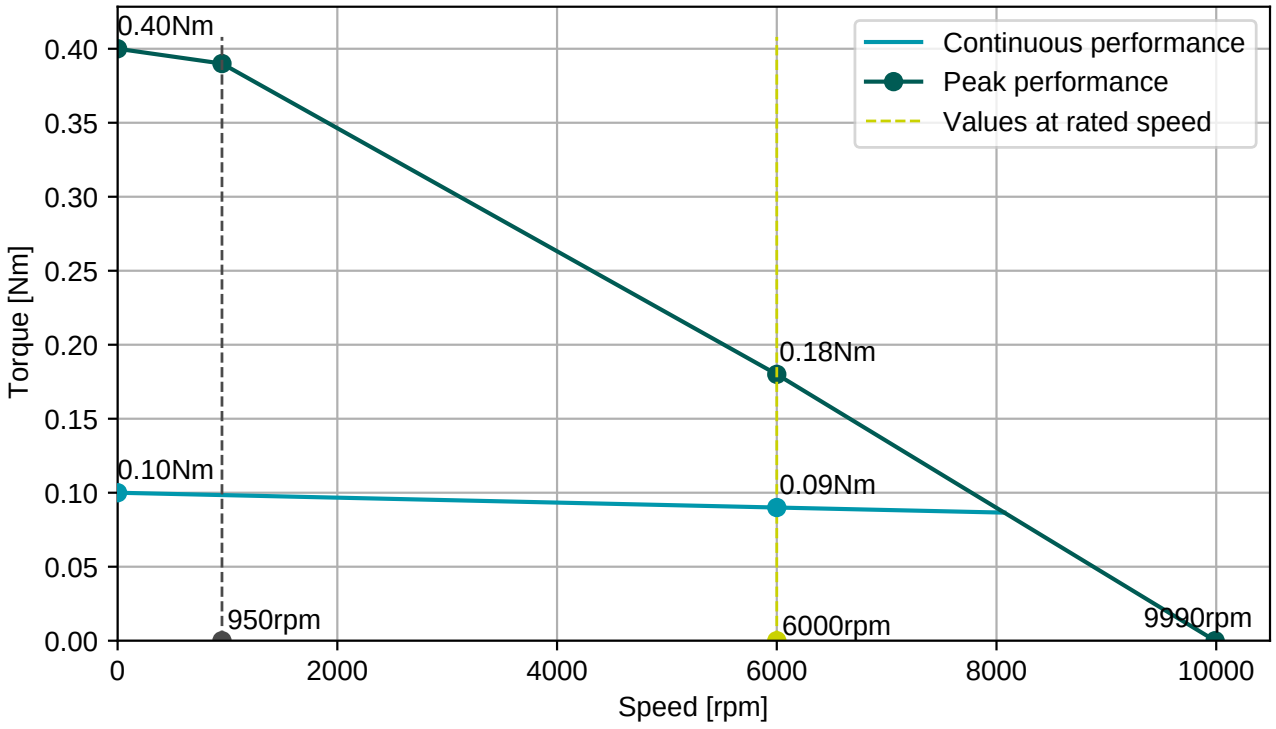

EGA101N00000001000


2x M15, 9 and 12 poles rotary

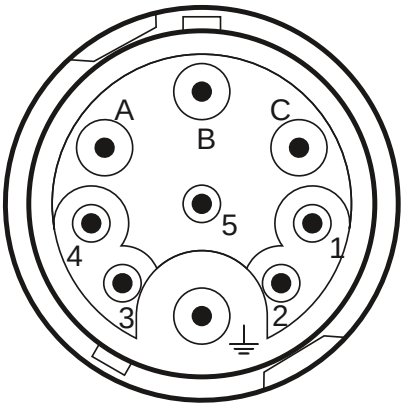


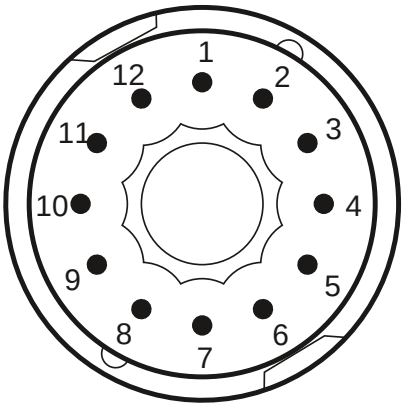


Connector 1 (226)	
A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (227)	
2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

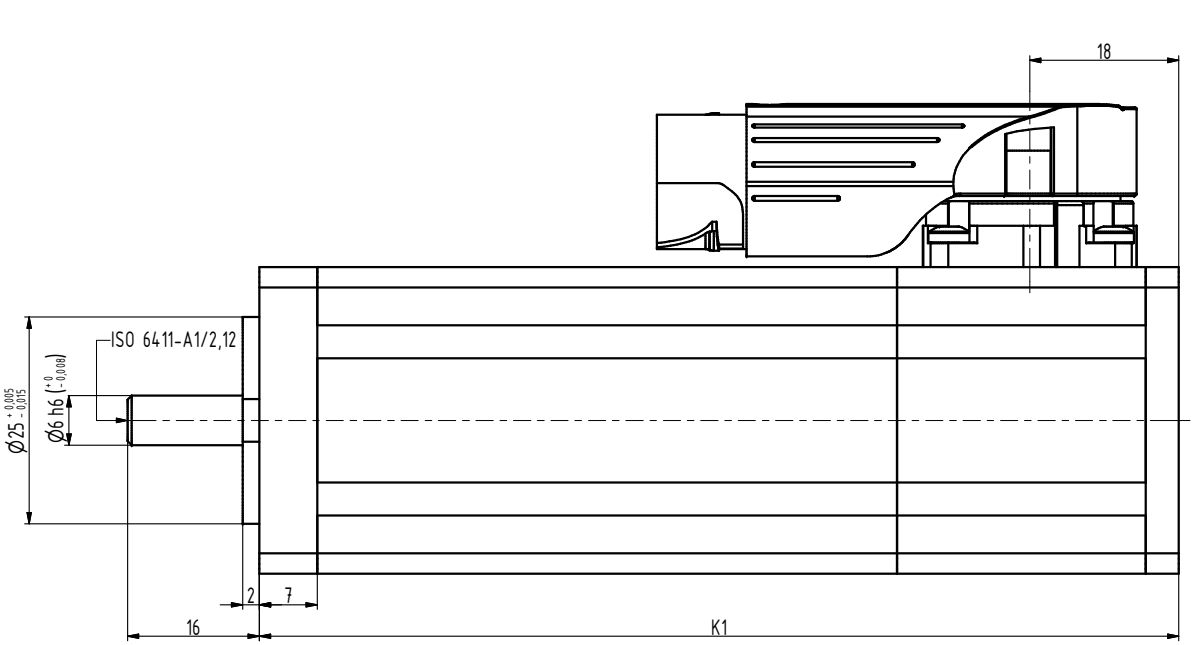

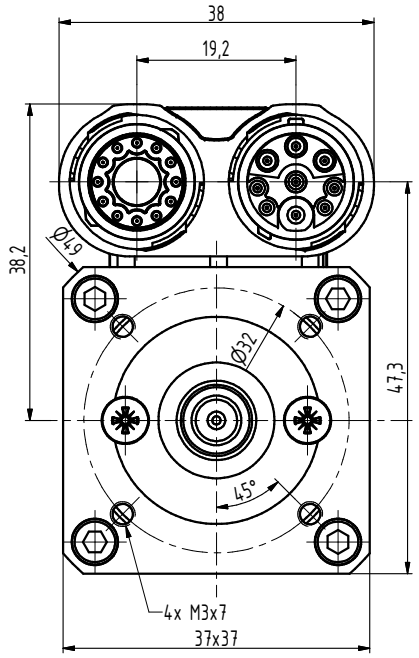



TYP	A	K1
S1-0010	15	111
S1-0020	30	126
S1-0030	45	141

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.		T.O.	HMOTNOST kg	MĚŘ.	
ROZM.-POLOT.					
POM. ZAŘ.			ČSN	TŘ.Č.	
VYPR. Ošlejšek	NORM.REF.		POZN.	Č. KUSOVNÍKU	
PŘEKR.					
TECHNOL.	SCHVÁLIL Ošlejšek	22.4.2016	STARÝ V.	Č.V.	
NÁZEV: Motor S1			S1018 00 B Z		
			Listů	List	