

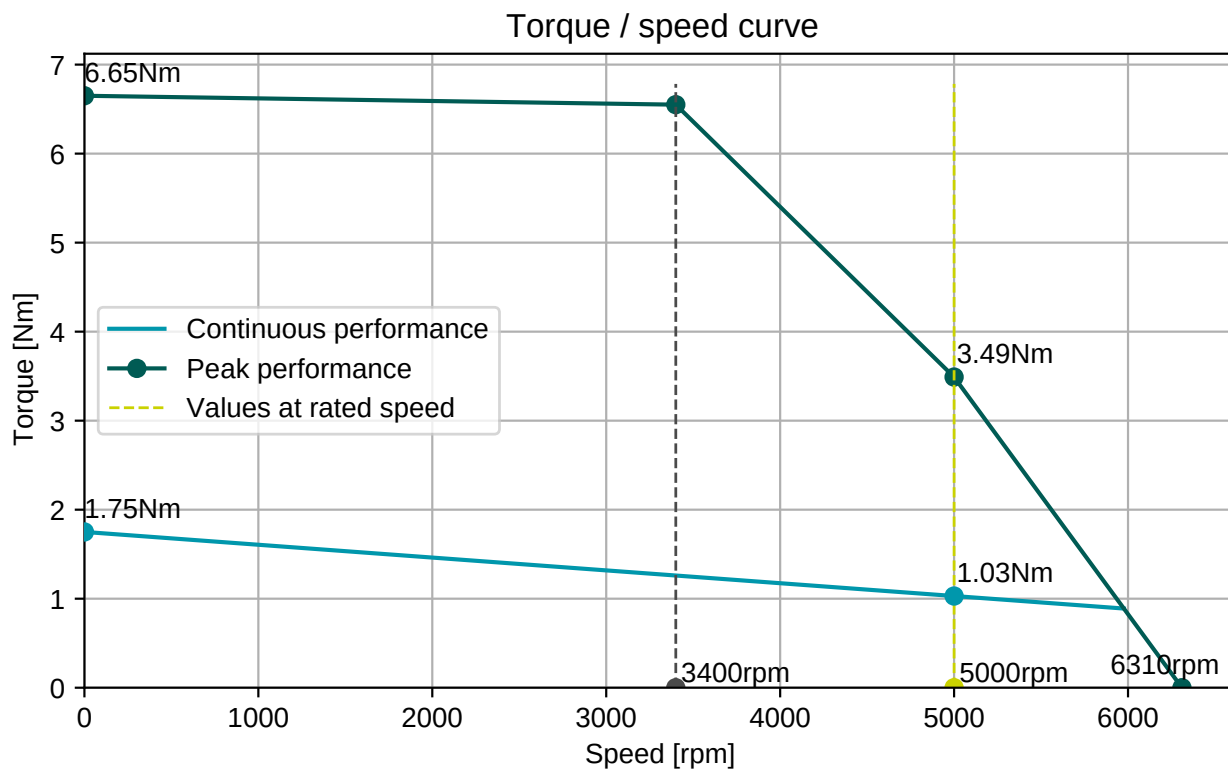


Engineering data (WIN 1531)		Mechanical data (setting 49)	
DC bus voltage	560 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	380 V AC (rms)	Mech. time constant	1.39 ms
Rated voltage	297 V AC (rms)	Thermal time constant	28 min
Rated power	539 W	Rotor inertia	0.68 kgcm ²
Rated speed	5000 rpm	Protection	IP64
Rated torque	1.03 Nm	Color	RAL 9005
Rated current	1.25 A (rms)	Cooling	Convection
Peak torque	6.65 Nm	Motor-only mass	2.4 kg
Peak current	7.8 A (rms)	Max. axial force 20kh	54 N
Stall torque	1.75 Nm	Max. radial force 20kh	283 N*
Stall current	1.76 A (rms)	Max. axial force 100kh	31 N
No load speed	6310 rpm	Max. radial force 100kh	165 N*
EMF constant ±10%	60 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length	
Theoretical torque constant ±10%	0.992 Nm / A (rms)	Sensors	
Torque constant ±10% @ rated load	0.824 Nm / A (rms)	Temperature	PT1000 {PT1000}
Number of poles	10	Feedback	SKM36 (Hiperface) multi-turn, 128 sin/cos+12bits
Electrical time constant	1.43 ms	Brake	
Winding terminal resistance	11.596 Ω	Braking torque	4.50 Nm
Rotary field terminal inductance	16.6 mH	Voltage	24 V DC
Power @20°C		Current @20°C	12.0 W
Inertia		Mass	0.50 A
Mass		0.20 kgcm ²	
Customs info		0.47 kg	
HS Code	85015100		

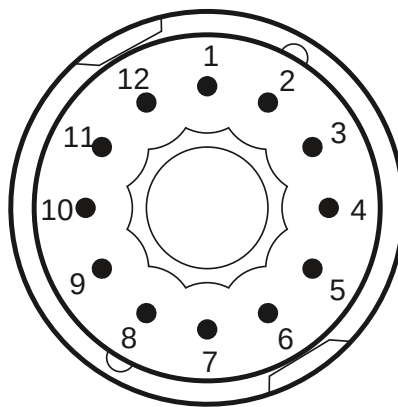

EGA101N00000001000
 2x M15, 9 and 12 poles rotary

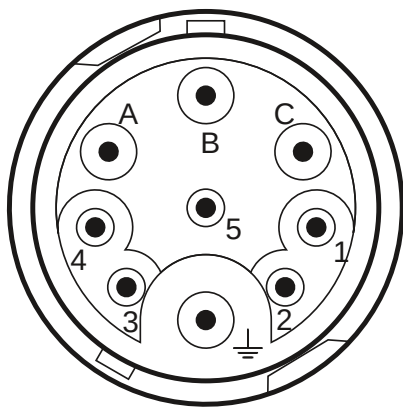

Connector 1 (226)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (208)

1	Us
2	GND
3	+ COS
4	REFCOS
5	REFSIN
6	+ SIN
7	Therm+
8	Therm-
9	Data +
10	Data -

