

Engineering data (WIN 1532)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	231 V AC (rms)
Rated power	624 W
Rated speed	4000 rpm
Rated torque	1.49 Nm
Rated current	1.88 A (rms)
Peak torque	11.4 Nm
Peak current	13.2 A (rms)
Stall torque	3 Nm
Stall current	3.07 A (rms)
No load speed	6420 rpm
EMF constant ±10%	59 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.976 Nm / A (rms)
Torque constant ±10% @ rated load	0.793 Nm / A (rms)
Number of poles	10
Electrical time constant	1.63 ms
Winding terminal resistance	4.953 Ω
Rotary field terminal inductance	8.06 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 49)

Max mechanical speed	12000 rpm
Mech. time constant	1.08 ms
Thermal time constant	40 min
Rotor inertia	1.2 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	3.3 kg
Max. axial force 20kh	62 N
Max. radial force 20kh	328 N*
Max. axial force 100kh	36 N
Max. radial force 100kh	192 N*


* Defined for point of action at ½ output shaft length

Sensors



Temperature	PT1000 {PT1000}
Feedback	SKM36 (Hiperface) multi-turn, 128 sin/cos+12bits

Brake

Braking torque	4.50 Nm
Voltage	24 V DC
Power @20°C	12.0 W
Current @20°C	0.50 A
Inertia	0.20 kgcm ²
Mass	0.47 kg

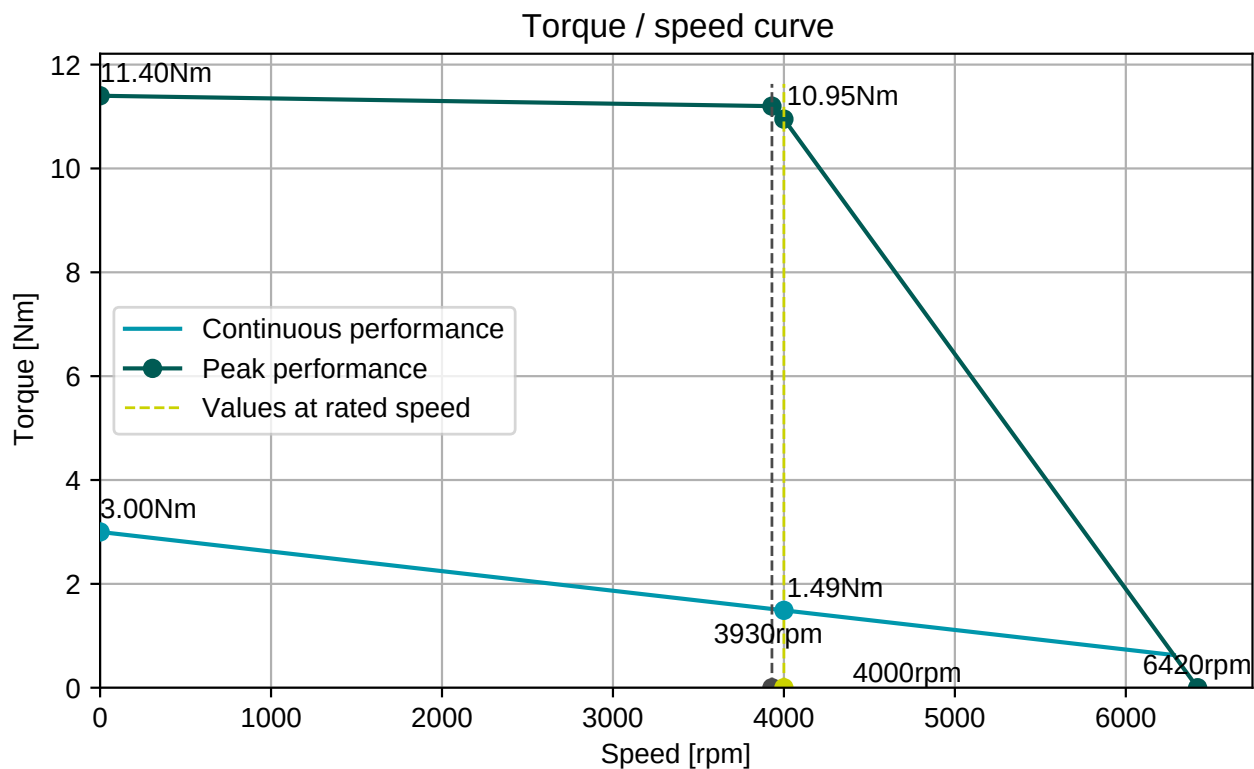

EGA101N00000001000
 2x M15, 9 and 12 poles rotary

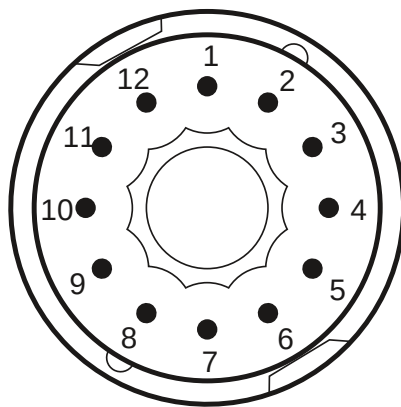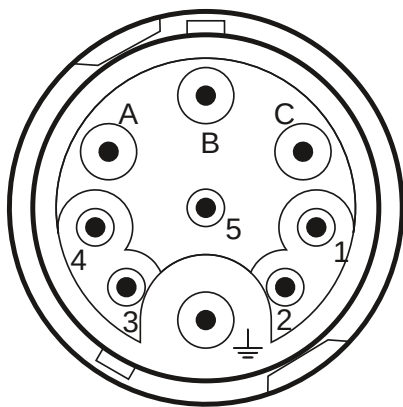

Connector 1 (226)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (208)

1	Us
2	GND
3	+ COS
4	REFCOS
5	REFSIN
6	+ SIN
7	Therm+
8	Therm-
9	Data +
10	Data -

