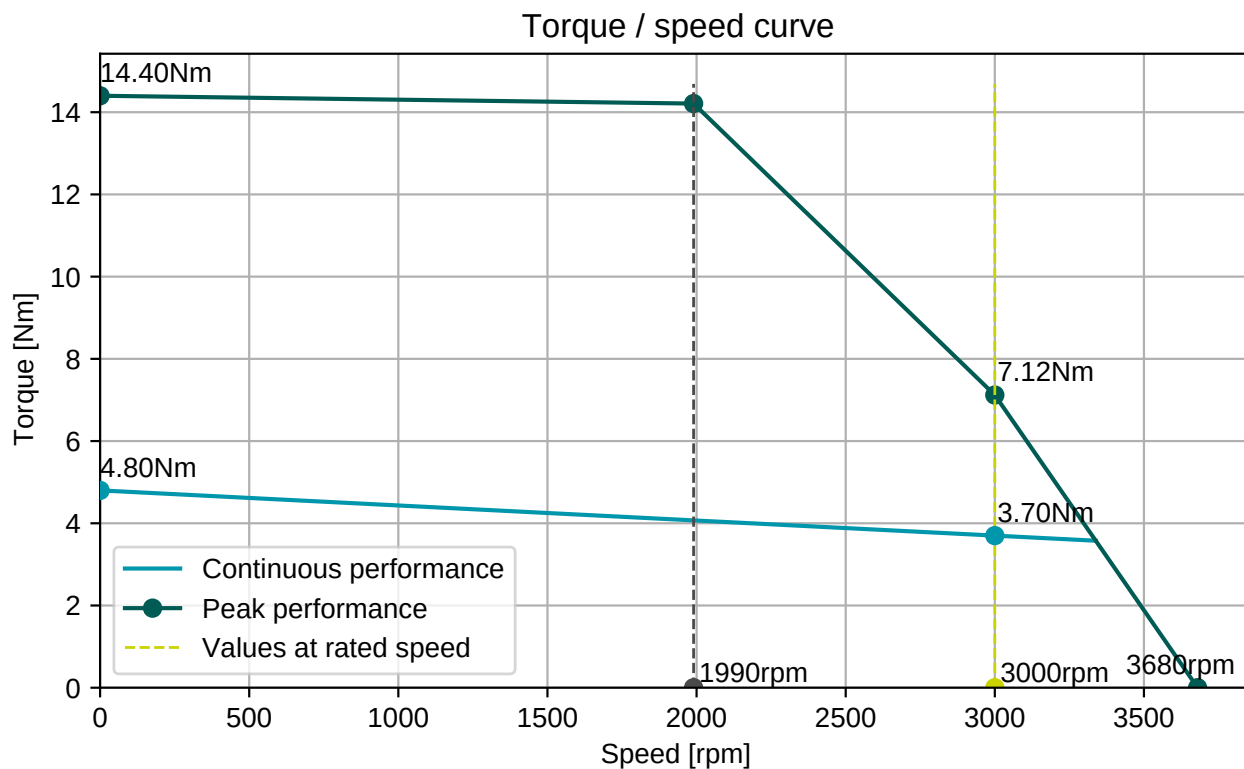


| Engineering data (WIN 954)        |                             | Mechanical data (setting 46)                           |                                                     |
|-----------------------------------|-----------------------------|--------------------------------------------------------|-----------------------------------------------------|
| DC bus voltage                    | 560 V DC                    | Max mechanical speed                                   | 12000 rpm                                           |
| Nominal AC voltage                | 380 V AC (rms)              | Mech. time constant                                    | 0.68 ms                                             |
| Rated voltage                     | 310 V AC (rms)              | Thermal time constant                                  | 30 min                                              |
| Rated power                       | 1.2 kW                      | Rotor inertia                                          | 1.52 kgcm <sup>2</sup>                              |
| Rated speed                       | 3000 rpm                    | Protection                                             | IP64                                                |
| Rated torque                      | 3.70 Nm                     | Color                                                  | RAL 9005                                            |
| Rated current                     | 2.6 A (rms)                 | Cooling                                                | Convection                                          |
| Peak torque                       | 14.4 Nm                     | Motor-only mass                                        | 4.3 kg                                              |
| Peak current                      | 10.1 A (rms)                | Max. axial force 20kh                                  | 75 N                                                |
| Stall torque                      | 4.8 Nm                      | Max. radial force 20kh                                 | 393 N*                                              |
| Stall current                     | 2.82 A (rms)                | Max. axial force 100kh                                 | 44 N                                                |
| No load speed                     | 3680 rpm                    | Max. radial force 100kh                                | 230 N*                                              |
| EMF constant ±10%                 | 103 V AC (rms)<br>/ 1000rpm | * Defined for point of action at ½ output shaft length |                                                     |
| Theoretical torque constant ±10%  | 1.7 Nm / A<br>(rms)         | Sensors                                                |                                                     |
| Torque constant ±10% @ rated load | 1.4 Nm / A<br>(rms)         | Temperature                                            | PT1000 {PT1000}                                     |
| Number of poles                   | 10                          | Feedback                                               | SKM36 (Hiperface) multi-turn,<br>128 sin/cos+12bits |
| Electrical time constant          | 3.01 ms                     | Brake                                                  |                                                     |
| Winding terminal resistance       | 7.53 Ω                      | Braking torque                                         | 4.50 Nm                                             |
| Rotary field terminal inductance  | 22.7 mH                     | Voltage                                                | 24 V DC                                             |
| <b>Customs info</b>               |                             | Power @20°C                                            | 12.0 W                                              |
| HS Code                           | 85015220                    | Current @20°C                                          | 0.50 A                                              |
|                                   |                             | Inertia                                                | 0.20 kgcm <sup>2</sup>                              |
|                                   |                             | Mass                                                   | 0.47 kg                                             |


**BGC110N00001216000**

M23, 8 poles, rotary


**AGC113N00001215000**

M23, 17 poles, rotary


**Connector 1 (9)**

|   |        |
|---|--------|
| 1 | U      |
| 4 | V      |
| 3 | W      |
| 2 | PE     |
| A | Brake+ |
| B | Brake- |
| C |        |
| D |        |

**Connector 2 (130)**

|      |            |
|------|------------|
| 1/9  | SIN/REFSIN |
| 3/11 | COS/REFCOS |
| 5/13 | DATA/DATA- |
| 4/2  | Us/GND     |
| 14/7 | Therm      |

