

Engineering data (WIN 816)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	266 V AC (rms)
Rated power	2.8 kW
Rated speed	3000 rpm
Rated torque	8.80 Nm
Rated current	7.41 A (rms)
Peak torque	33.9 Nm
Peak current	27.9 A (rms)
Stall torque	11.3 Nm
Stall current	7.5 A (rms)
No load speed	4170 rpm
EMF constant ±10%	91 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.51 Nm / A (rms)
Torque constant ±10% @ rated load	1.19 Nm / A (rms)
Number of poles	10
Electrical time constant	6.27 ms
Winding terminal resistance	1.42 Ω
Rotary field terminal inductance	8.9 mH

Customs info

HS Code	85015220
---------	----------

Mechanical data (setting 46)

Max mechanical speed	9000 rpm
Mech. time constant	0.62 ms
Thermal time constant	40 min
Rotor inertia	5.7 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	8.5 kg
Max. axial force 20kh	135 N
Max. radial force 20kh	713 N*
Max. axial force 100kh	79 N
Max. radial force 100kh	417 N*

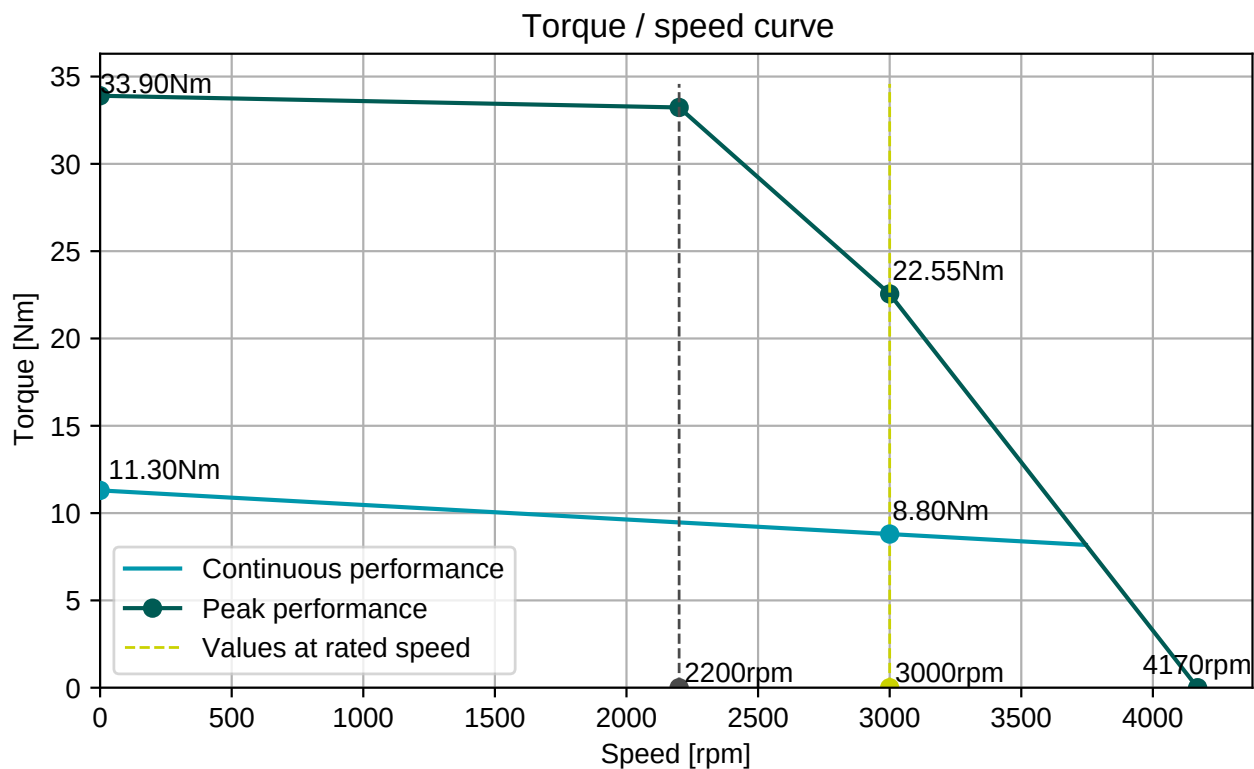
* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	SKM36 (Hiperface) multi-turn, 128 sin/cos+12bits

Brake

Braking torque	9.00 Nm
Voltage	24 V DC
Power @20°C	18.0 W
Current @20°C	0.75 A
Inertia	0.60 kgcm ²
Mass	0.82 kg


BGC110N00001216000

M23, 8 poles, rotary


AGC113N00001215000

M23, 17 poles, rotary


Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (130)

1/9	SIN/REFSIN
3/11	COS/REFCOS
5/13	DATA/DATA-
4/2	Us/GND
14/7	Therm

