

Engineering data (WIN 898)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	284 V AC (rms)
Rated power	6.1 kW
Rated speed	2000 rpm
Rated torque	29.00 Nm
Rated current	14.95 A (rms)
Peak torque	114 Nm
Peak current	64.4 A (rms)
Stall torque	38 Nm
Stall current	16.6 A (rms)
No load speed	2750 rpm
EMF constant ±10%	138 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	2.28 Nm / A (rms)
Torque constant ±10% @ rated load	1.94 Nm / A (rms)
Number of poles	10
Electrical time constant	13.85 ms
Winding terminal resistance	0.52 Ω
Rotary field terminal inductance	7.2 mH

Customs info

HS Code	85015220
---------	----------

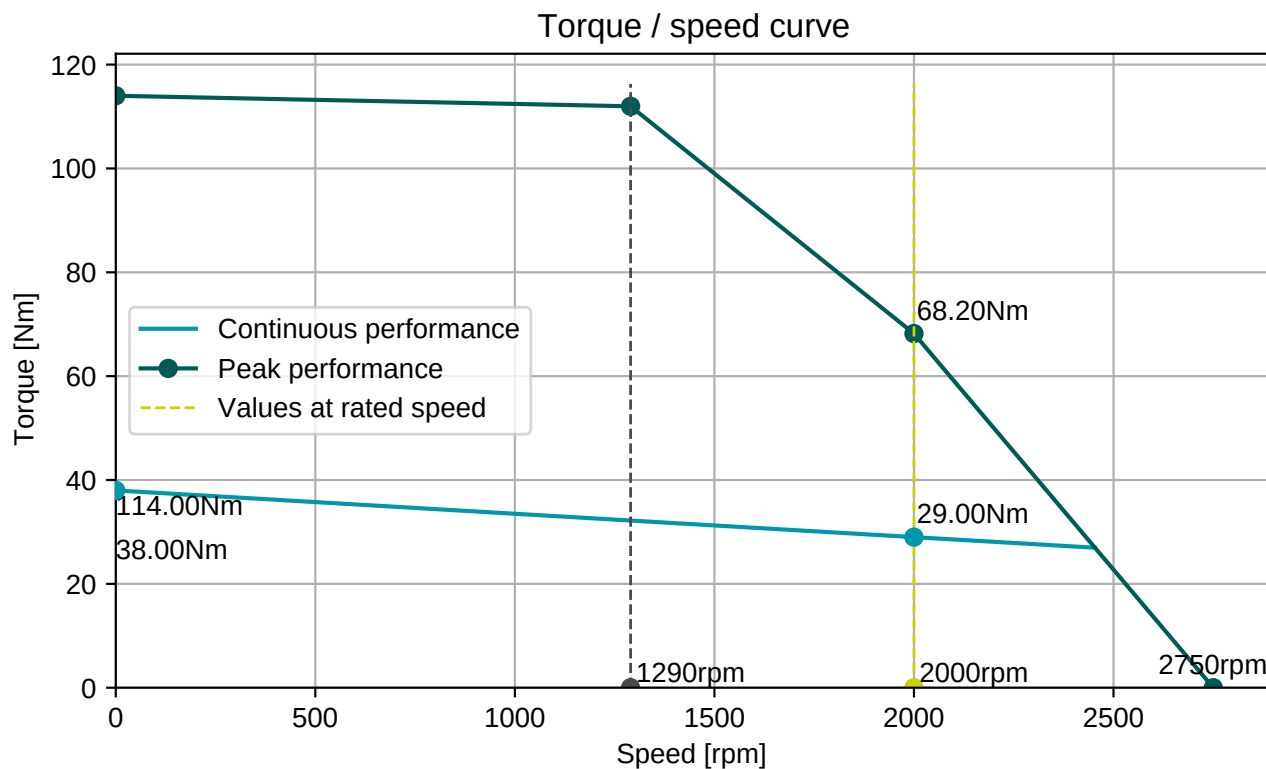
Mechanical data (setting 46)

Max mechanical speed	6000 rpm
Mech. time constant	0.69 ms
Thermal time constant	57 min
Rotor inertia	39.9 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	20.2 kg
Max. axial force 20kh	161 N
Max. radial force 20kh	849 N*
Max. axial force 100kh	94 N
Max. radial force 100kh	496 N*

* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	SKM36 (Hiperface) multi-turn, 128 sin/cos+12bits


BGC110N00001216000

M23, 8 poles, rotary


AGC113N00001215000

M23, 17 poles, rotary


Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (130)

1/9	SIN/REFSIN
3/11	COS/REFCOS
5/13	DATA/DATA-
4/2	Us/GND
14/7	Therm

