| Engineering data (WIN 745) | | |
|---|---|---|
| DC bus voltage | 320 | V DC |
| Nominal AC voltage | 220 | V AC (rms) |
| Rated voltage | 172 | V AC (rms) |
| Rated power | 401 | W |
| Rated speed | 4500 | rpm |
| Rated torque | 0.85 | Nm |
| Rated current | 1.7 | A (rms) |
| Peak torque | 3.8 | Nm |
| Peak current | 8.4 | A (rms) |
| Stall torque | 0.95 | Nm |
| Stall current | 1.82 | A (rms) |
| No load speed | 6950 | rpm |
| EMF constant ±10% | 31.5 | V AC (rms) / 1000rpm |
| Theoretical torque constant ±10% | 0.52 | Nm / A (rms) |
| Torque constant ±10% @ rated load | 0.50 | Nm / A (rms) |
| Number of poles | 6 | |
| Electrical time constant | 1.46 | ms |
| Winding terminal resistance | 13.05 | Ω |
| Rotary field terminal inductance | 19 | mH |


| Customs info | |
|---|---|
| HS Code | 85015100 |

| Mechanical data (setting 29) | | |
|---|---|---|
| Max mechanical speed | 12000 | rpm |
| Mech. time constant | 0.92 | ms |
| Thermal time constant | 18 | min |
| Rotor inertia | 0.11 | kgcm² |
| Protection | IP64 | |
| Color | RAL 9005 | |
| Cooling | Convection | |
| Motor-only mass | 1.27 | kg |
| Max. axial force 20kh | 42 | N |
| Max. radial force 20kh* | 222 | N |
| Max. axial force 100kh | 25 | N |
| Max. radial force 100kh* | 130 | N |


** Defined for point of action at ½ output shaft length*

| Sensors | |
|---|---|
| Temperature | PT1000 {PT1000} |
| Feedback | EQI1131 (EnDat 2.2) multi-turn, 19 + 12 bits |


Torque / speed curve

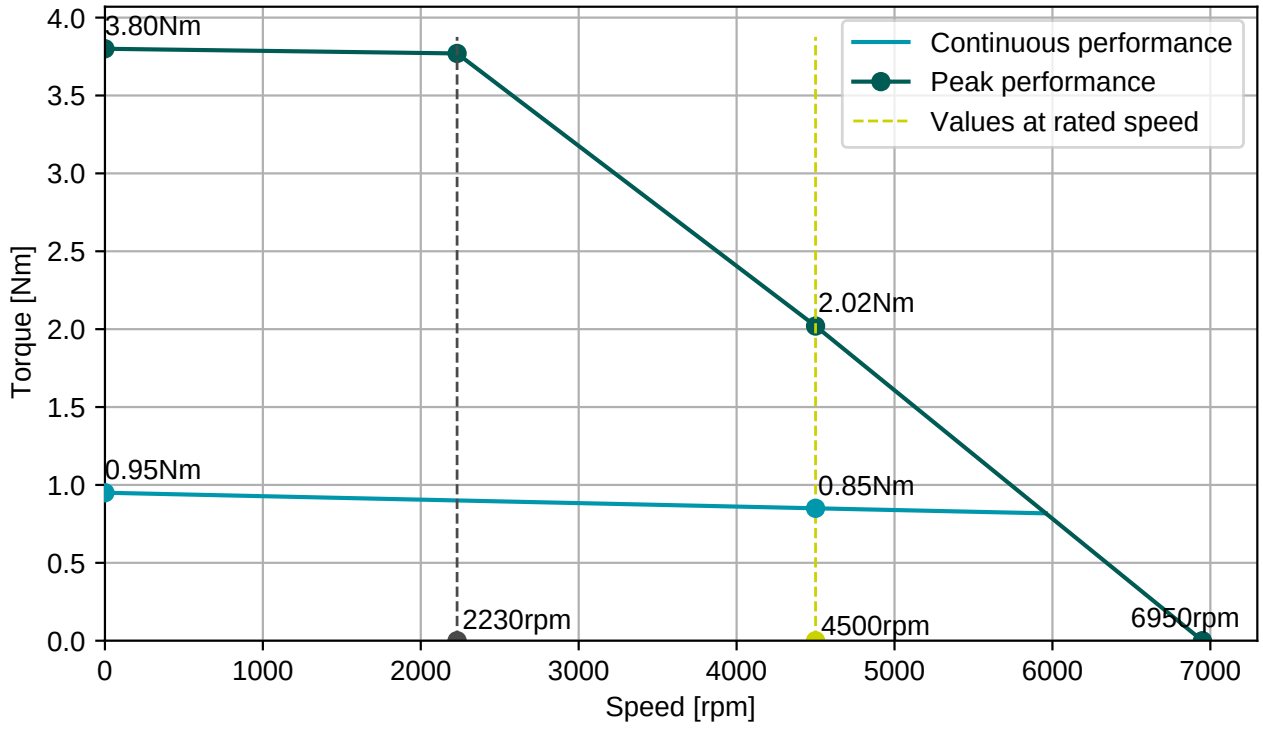


**BGC110N00001216000**
M23, 8 poles, rotary

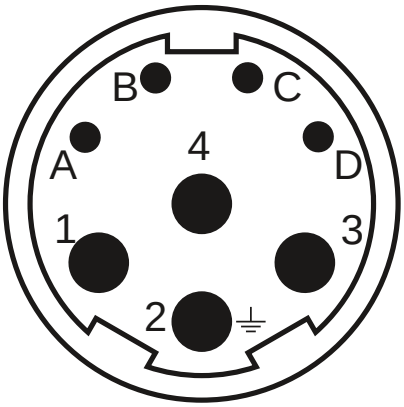




**AGC052N00001215000**
M23, 12 poles, rotary

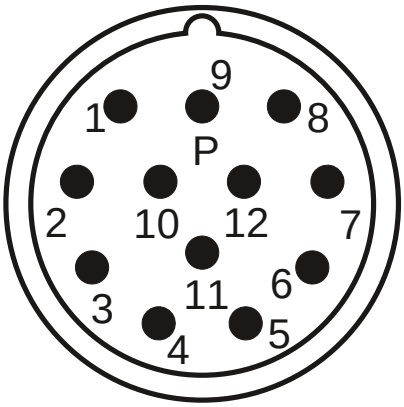


| Connector 1 (9) | |
|---|---|
| **1** | U |
| **4** | V |
| **3** | W |
| **2** | PE |
| **A** | Brake+ |
| **B** | Brake- |
| **C** | |
| **D** | |

| Connector 2 (293) | |
|---|---|
| **1** | Vcc (+5V) |
| **2** | GND |
| **3** | DATA |
| **4** | DATA- |
| **5** | CLOCK |
| **6** | CLOCK- |
| **7** | Therm+ |
| **8** | Therm- |
| **9** | Vcc sensor |
| **10** | GND sensor |

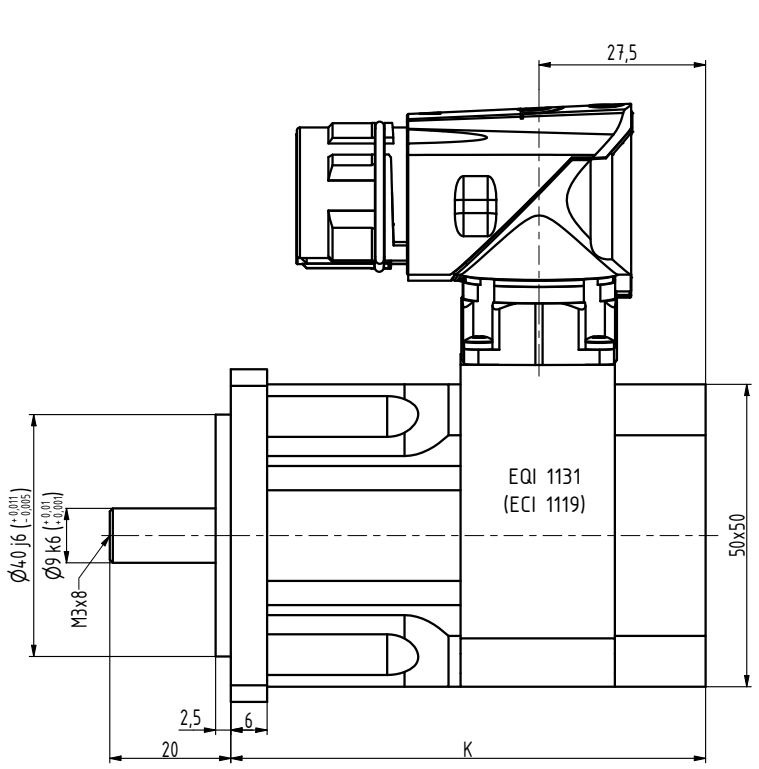

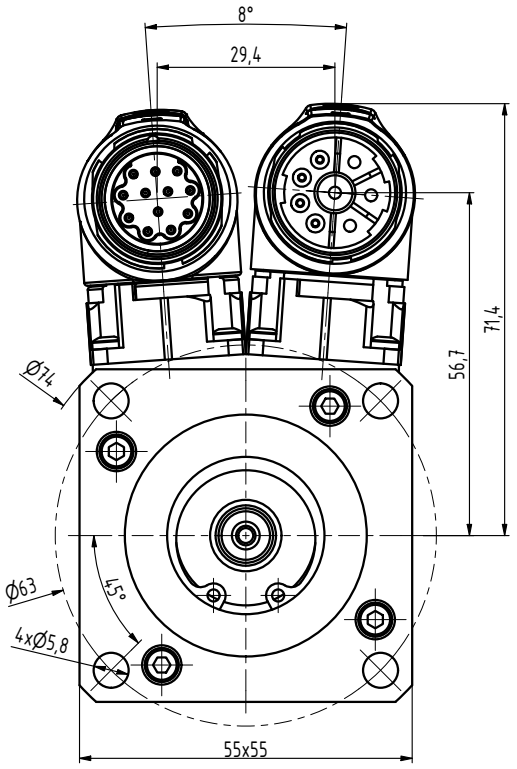
| TYP | K |
|---|---|
| N2-0028 | 78,5 |
| N2-0054 | 93,5 |
| N2-0075 | 108,5 |
| N2-0095 | 123,5 |
| N2-0112 | 138,5 |

| INDEX | ZMĚNA | DATUM | PODPIS |
|---|---|---|---|
| | | | |

| | | | | | |
|---|---|---|---|---|---|
| ZN.MAT. | | T.O. | HMOTNOST kg | MĚŘ. | |
| ROZM.-POLOT. | | | | | |
| POM. ZAŘ. | | | ČSN | TŘ.Č. | |
| VYPR. Šimík | NORM.REF. | | POZN. | Č. KUSOVNÍKU | |
| PŘEKR. Ošlejšek 4.2.22 | | | | | |
| TECHNOL. | SCHVÁLIL Ošlejšek | 22.01.2019 | STARÝ V. | Č.V. | |

NÁZEV

Motor N2

N2100 00 Z_S4_S1

Listů List