

Engineering data (WIN 712)

DC bus voltage	320 V DC
Nominal AC voltage	220 V AC (rms)
Rated voltage	161 V AC (rms)
Rated power	2.4 kW
Rated speed	3000 rpm
Rated torque	7.70 Nm
Rated current	10.84 A (rms)
Peak torque	28.8 Nm
Peak current	49.2 A (rms)
Stall torque	9.6 Nm
Stall current	10.7 A (rms)
No load speed	4060 rpm
EMF constant ±10%	54 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.89 Nm / A (rms)
Torque constant ±10% @ rated load	0.71 Nm / A (rms)
Number of poles	10
Electrical time constant	6.10 ms
Winding terminal resistance	0.59 Ω
Rotary field terminal inductance	3.6 mH

Customs info

HS Code	85015220
---------	----------

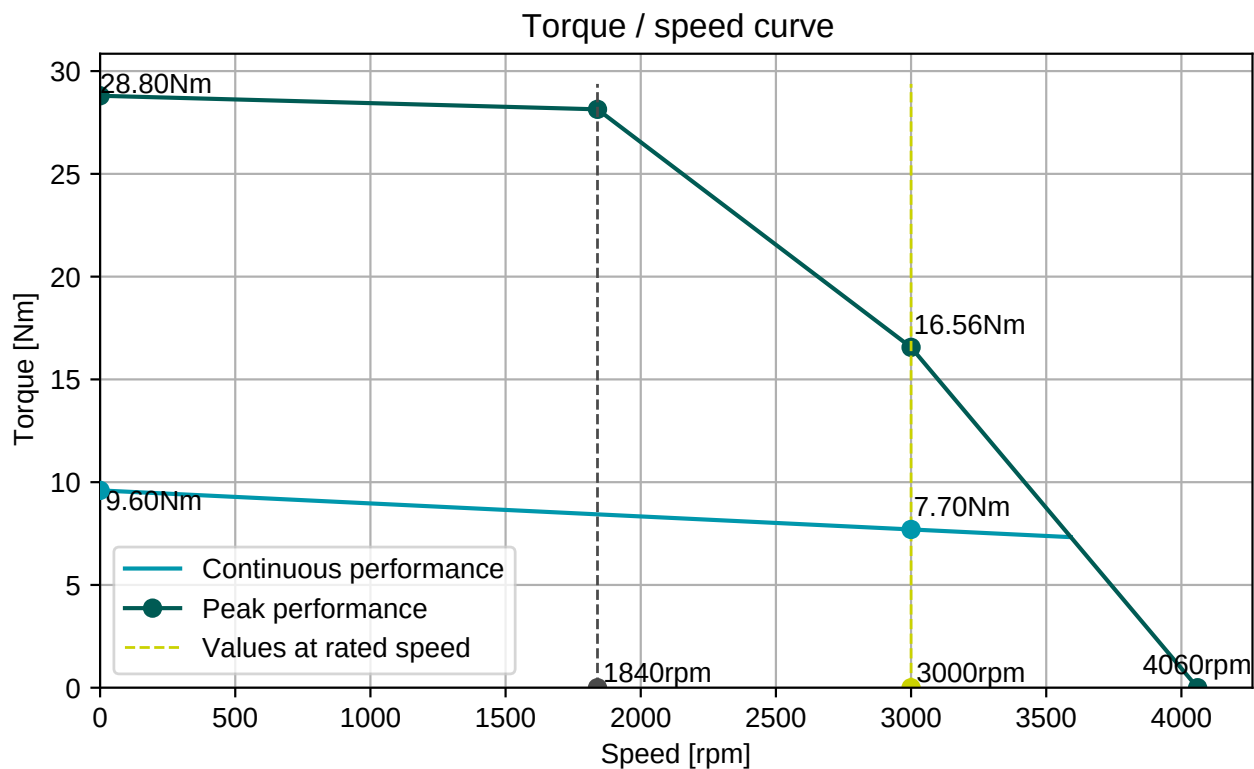
Mechanical data (setting 29)

Max mechanical speed	9000 rpm
Mech. time constant	0.58 ms
Thermal time constant	35 min
Rotor inertia	4.49 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	6.4 kg
Max. axial force 20kh	131 N
Max. radial force 20kh	689 N*
Max. axial force 100kh	77 N
Max. radial force 100kh	403 N*

* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EQI1131 (EnDat 2.2) multi-turn, 19 + 12 bits


BGC110N00001216000

M23, 8 poles, rotary


AGC052N00001215000

M23, 12 poles, rotary


Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (293)

1	Vcc (+5V)
2	GND
3	DATA
4	DATA-
5	CLOCK
6	CLOCK-
7	Therm+
8	Therm-
9	Vcc sensor
10	GND sensor

