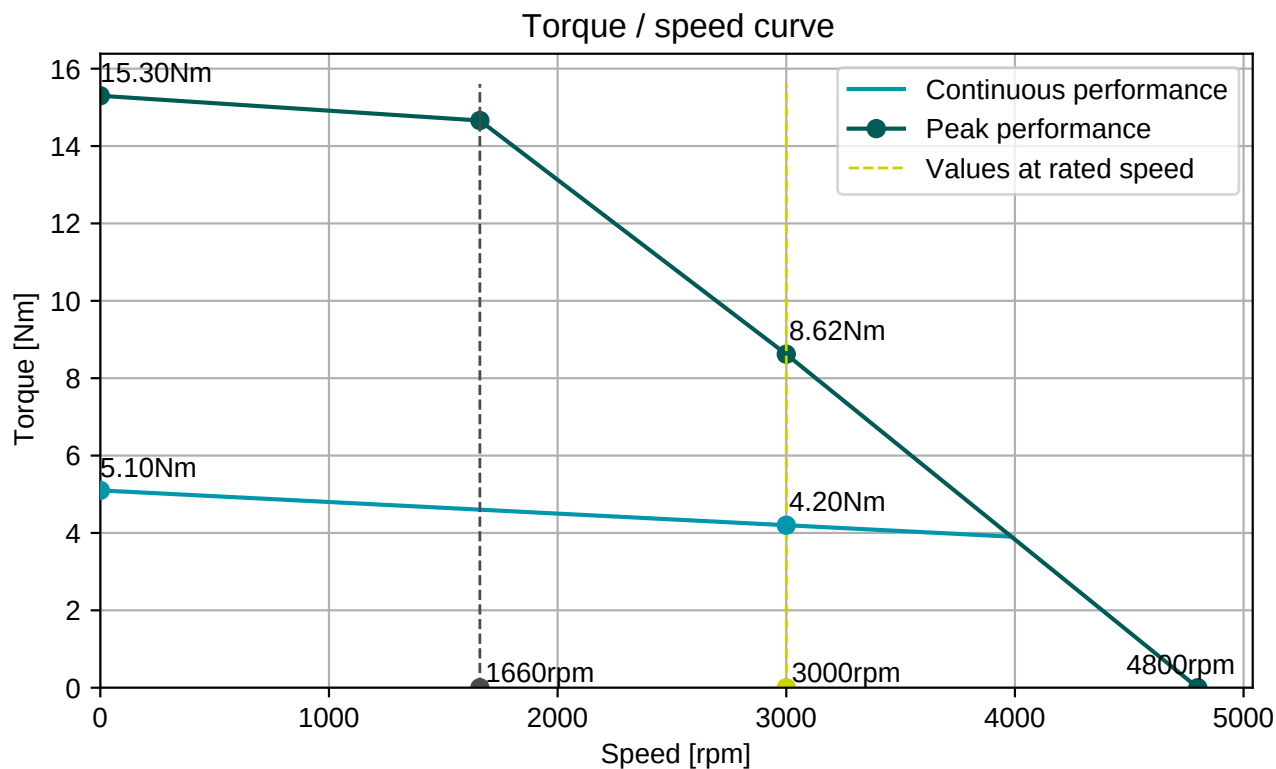


Engineering data (WIN 708)		Mechanical data (setting 29)							
DC bus voltage	320 V DC	Max mechanical speed	9000 rpm						
Nominal AC voltage	220 V AC (rms)	Mech. time constant	0.77 ms						
Rated voltage	155 V AC (rms)	Thermal time constant	25 min						
Rated power	1.3 kW	Rotor inertia	2.04 kgcm²						
Rated speed	3000 rpm	Protection	IP64						
Rated torque	4.20 Nm	Color	RAL 9005						
Rated current	7.01 A (rms)	Cooling	Convection						
Peak torque	15.3 Nm	Motor-only mass	3.8 kg						
Peak current	31 A (rms)	Max. axial force 20kh	113 N						
Stall torque	5.1 Nm	Max. radial force 20kh	595 N*						
Stall current	6.8 A (rms)	Max. axial force 100kh	66 N						
No load speed	4800 rpm	Max. radial force 100kh	348 N*						
EMF constant ±10%	45.5 V AC (rms) / 1000rpm	* Defined for point of action at ½ output shaft length							
Theoretical torque constant ±10%	0.75 Nm / A (rms)								
Torque constant ±10% @ rated load	0.60 Nm / A (rms)	<table><tr><th colspan="2">Sensors</th></tr><tr><td>Temperature</td><td>PT1000 {PT1000}</td></tr><tr><td>Feedback</td><td>EQI1131 (EnDat 2.2) multi-turn, 19 + 12 bits</td></tr></table>		Sensors		Temperature	PT1000 {PT1000}	Feedback	EQI1131 (EnDat 2.2) multi-turn, 19 + 12 bits
Sensors									
Temperature	PT1000 {PT1000}								
Feedback	EQI1131 (EnDat 2.2) multi-turn, 19 + 12 bits								
Number of poles	10								
Electrical time constant	5.48 ms								
Winding terminal resistance	1.24 Ω								
Rotary field terminal inductance	6.8 mH								
Customs info									
HS Code	85015220								


BGC110N00001216000

M23, 8 poles, rotary


AGC052N00001215000

M23, 12 poles, rotary


Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (293)

1	Vcc (+5V)
2	GND
3	DATA
4	DATA-
5	CLOCK
6	CLOCK-
7	Therm+
8	Therm-
9	Vcc sensor
10	GND sensor

