
Engineering data (WIN 1120)		
DC bus voltage	320	V DC
Nominal AC voltage	200	V AC (rms)
Rated voltage	184	V AC (rms)
Rated power	2.0	kW
Rated speed	3000	rpm
Rated torque	6.40	Nm
Rated current	7.02	A (rms)
Peak torque	34	Nm
Peak current	45	A (rms)
Stall torque	8.5	Nm
Stall current	9	A (rms)
No load speed	3500	rpm
EMF constant ±10%	57	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.94	Nm / A (rms)
Torque constant ±10% @ rated load	0.91	Nm / A (rms)
Number of poles	16	
Electrical time constant	2.35	ms
Winding terminal resistance	1.02	Ω
Rotary field terminal inductance	2.4	mH

Customs info	
HS Code	85015220

Mechanical data (setting 6)		
Max mechanical speed	2000	rpm
Mech. time constant	0.03	ms
Thermal time constant	20	min
Rotor inertia	0.14	kgcm²
Protection	IP00	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	3.35	kg


Sensors	
Temperature	PT1000 {PT1000}

Torque / speed curve

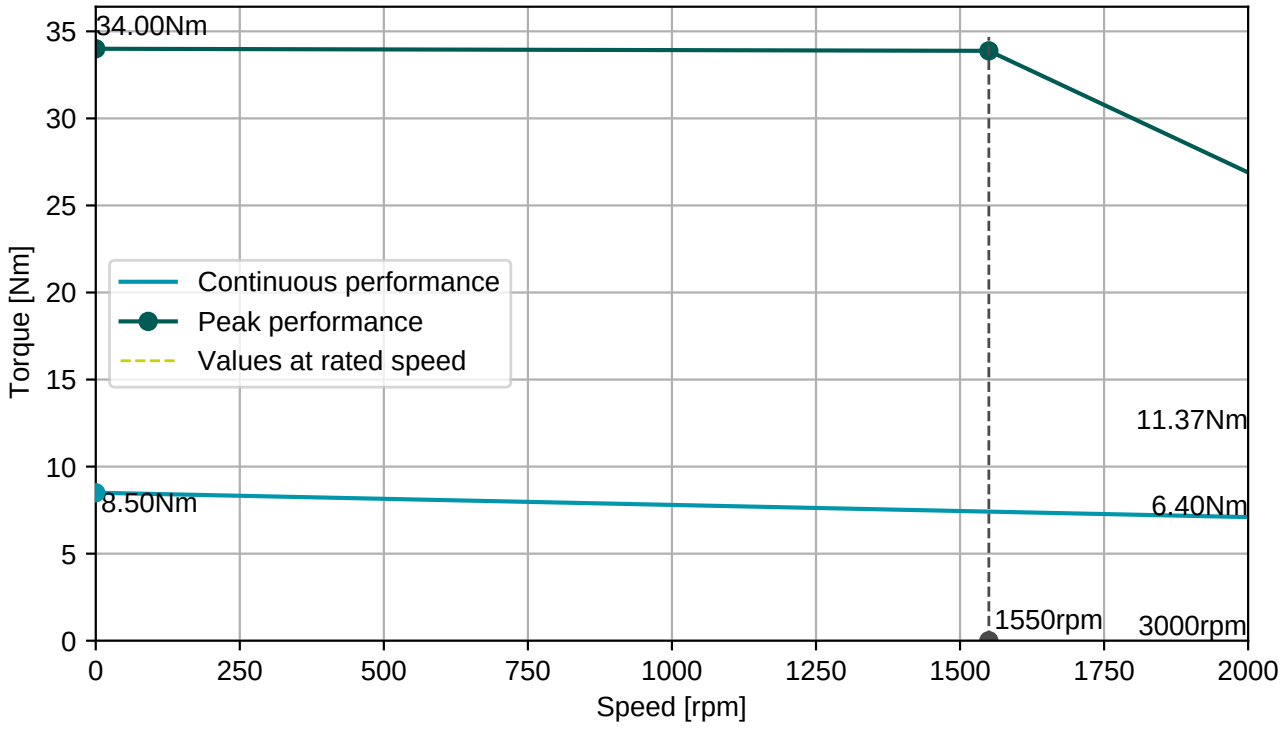

Connector 1 (259)	
white	U
blue	V
red	W

2x Therm
2x Brake

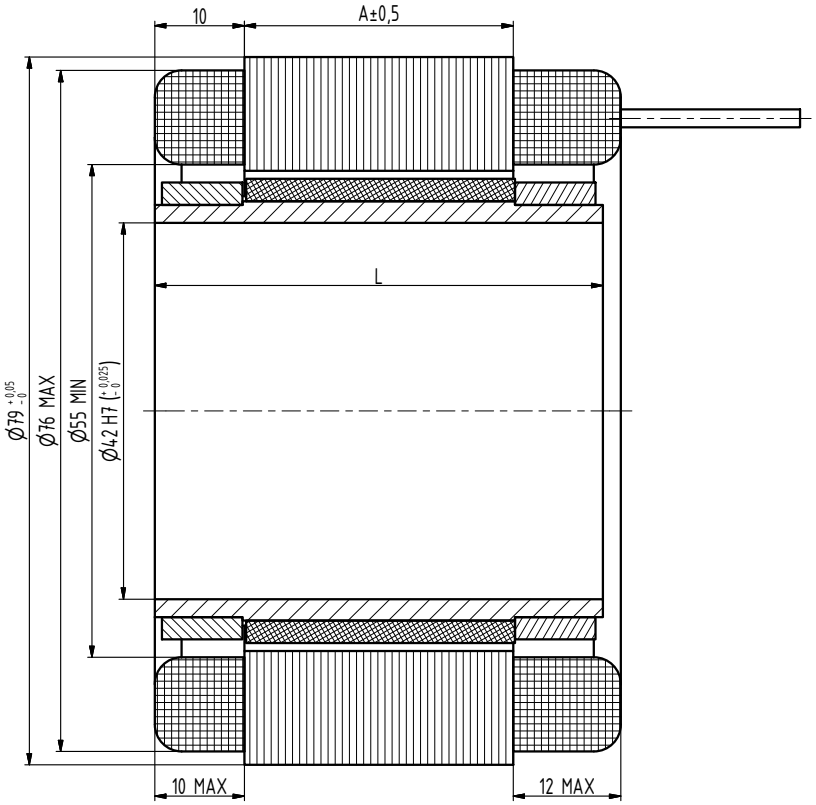

TYP	A	L
Q1-0225	30	50
Q1-0375	60	80
Q1-0515	90	110
Q1-0700	120	140
Q1-0850	150	170

INDEX	ZMĚNA	DATUM	PODPIS
a	oprava rozměru pro 0850	7.11.17	RŠ

ZN.MAT.		T.O.	HMOTNOST kg
ROZM.-POLOT.			MĚŘ. 2:1
POM. ZAŘ.			ČSN
VYPR. Šimík	NORM.REF.		POZN.
PŘEZK.			
TECHNOL.	SCHVÁLIL Ošlejšek	19.10.2016	STARÝ V.

TŘ.Č.
Č. KUSOVNÍKU
Č.V.

NÁZEV
Motor Q1

Q1000 00 Z a

Listů List