Engineering data (WIN -501)		
DC bus voltage	320	V DC
Nominal AC voltage	220	V AC (rms)
Rated voltage	199	V AC (rms)
Rated power	2.9	kW
Rated speed	800	rpm
Rated torque	34.10	Nm
Rated current	9.37	A (rms)
Peak torque	163.5	Nm
Peak current	50.43	A (rms)
Stall torque	54.5	Nm
Stall current	14.02	A (rms)
No load speed	930	rpm
EMF constant ±10%	235	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	3.89	Nm / A (rms)
Torque constant ±10% @ rated load	3.64	Nm / A (rms)
Number of poles	38	
Electrical time constant	3.25	ms
Winding terminal resistance	0.69	Ω
Rotary field terminal inductance	2.24	mH

Customs info	
HS Code	85015220

Mechanical data (setting 6)		
Max mechanical speed	4000	rpm
Mech. time constant	1.27	ms
Thermal time constant	61	min
Rotor inertia	161	kgcm²
Protection	IP00	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	8.6	kg

Sensors	
Temperature	PT1000 {PT1000}

Torque / speed curve

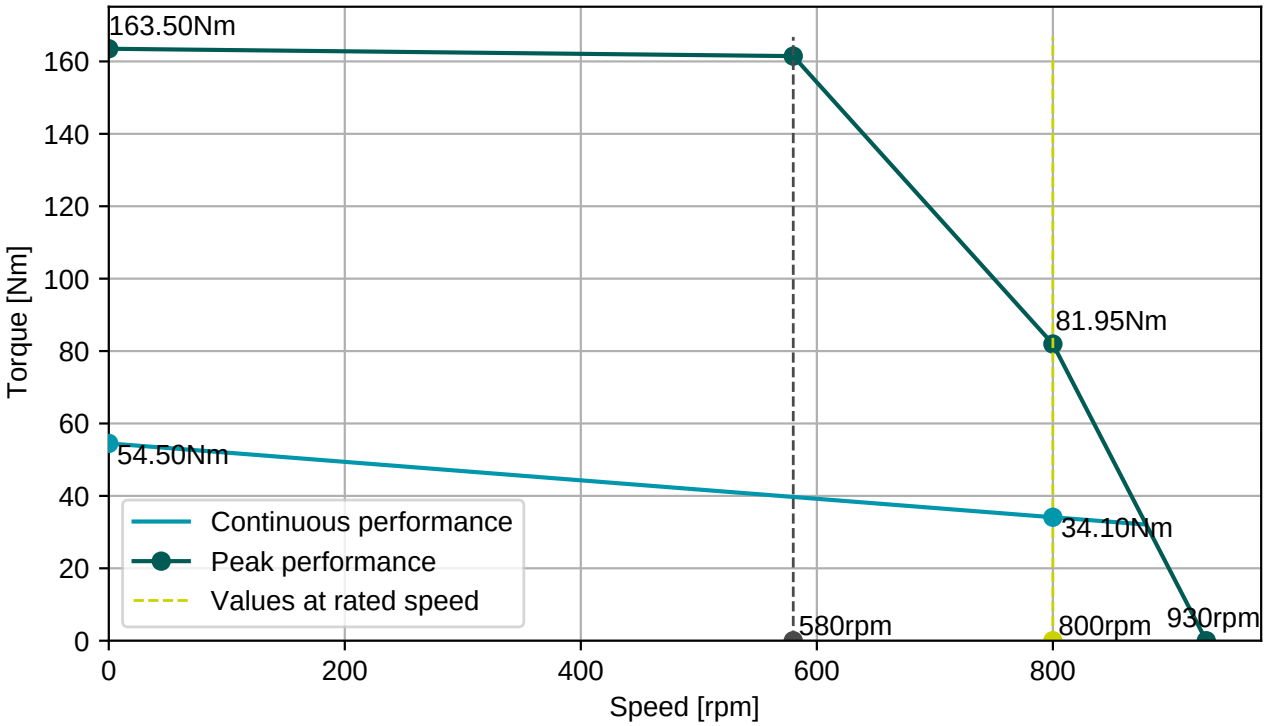

Connector 1 (259)	
white	U
blue	V
red	W

2x Therm
2x Brake

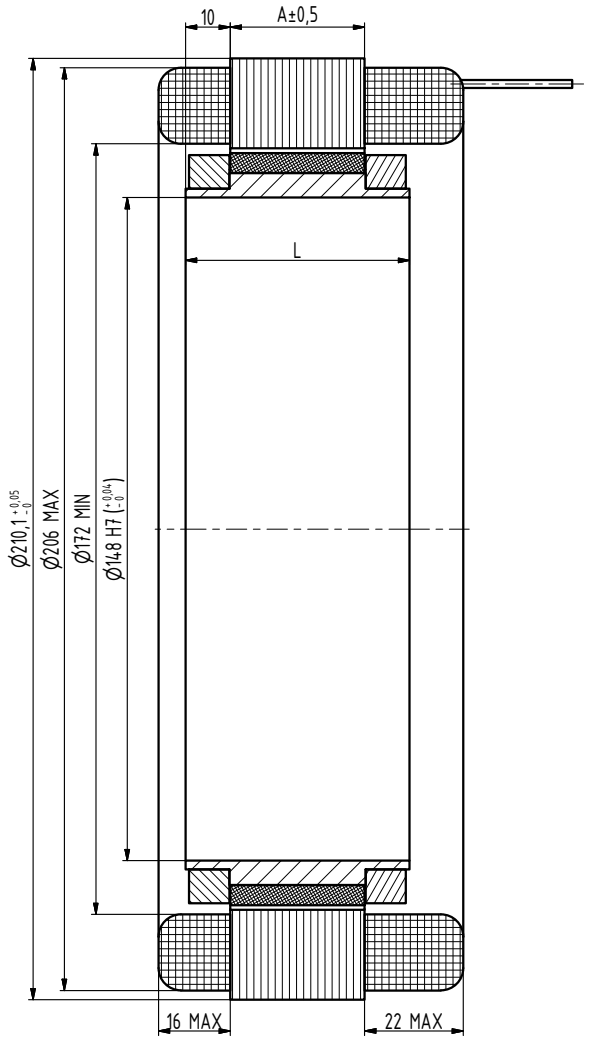

TYP	A	L
Q5-0280	30	50
Q5-0545	60	80
Q5-0810	90	110
Q5-1070	120	140
Q5-1340	150	170

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR. Šimík		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.		SCHVÁLIL Ošlejšek	19.10.2016	STARÝ V.	Č.V.

NÁZEV

Motor Q5

Q5000 00 Z

Listů List