
Engineering data (WIN -504)		
DC bus voltage	320	V DC
Nominal AC voltage	220	V AC (rms)
Rated voltage	187	V AC (rms)
Rated power	5.7	kW
Rated speed	700	rpm
Rated torque	78.10	Nm
Rated current	19.81	A (rms)
Peak torque	402	Nm
Peak current	113.93	A (rms)
Stall torque	134	Nm
Stall current	31.77	A (rms)
No load speed	860	rpm
EMF constant ±10%	255	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	4.22	Nm / A (rms)
Torque constant ±10% @ rated load	3.94	Nm / A (rms)
Number of poles	38	
Electrical time constant	4.20	ms
Winding terminal resistance	0.25	Ω
Rotary field terminal inductance	1.05	mH

Customs info	
HS Code	85015220

Mechanical data (setting 6)		
Max mechanical speed	4000	rpm
Mech. time constant	0.90	ms
Thermal time constant	91	min
Rotor inertia	369	kgcm²
Protection	IP00	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	19.4	kg


Sensors	
Temperature	PT1000 {PT1000}

Torque / speed curve

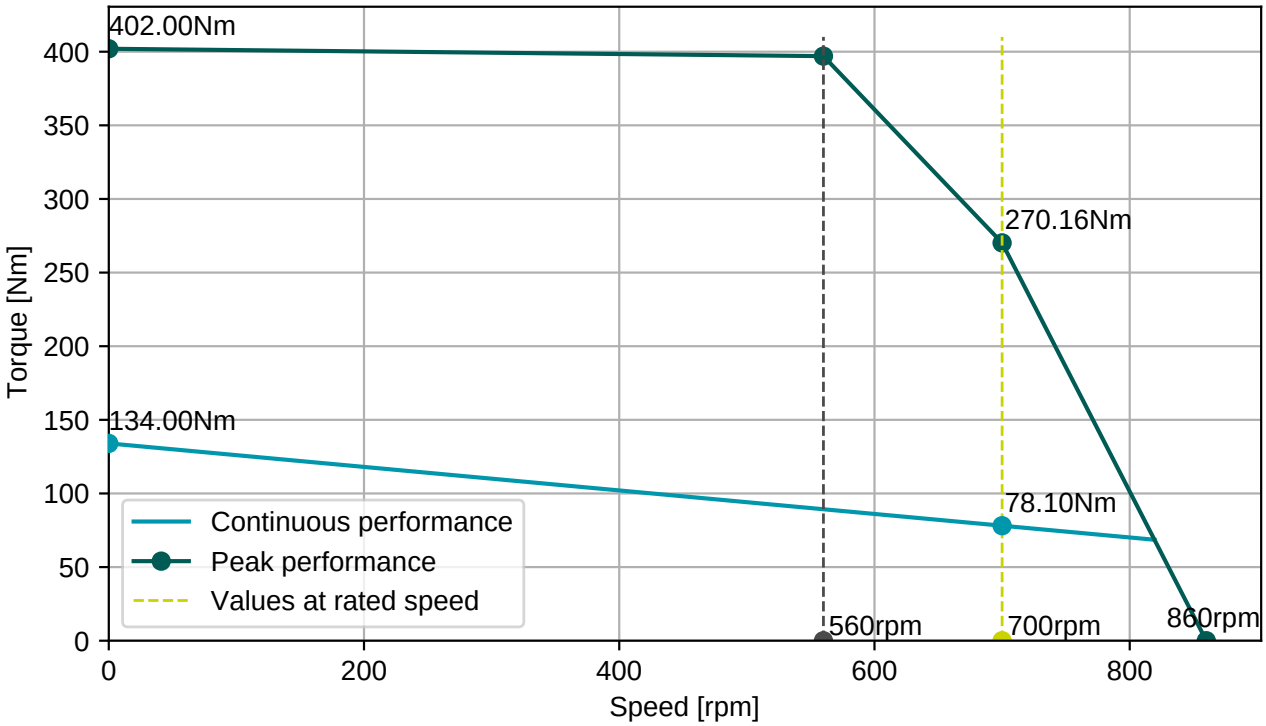

Connector 1 (259)	
white	U
blue	V
red	W

2x Therm
2x Brake

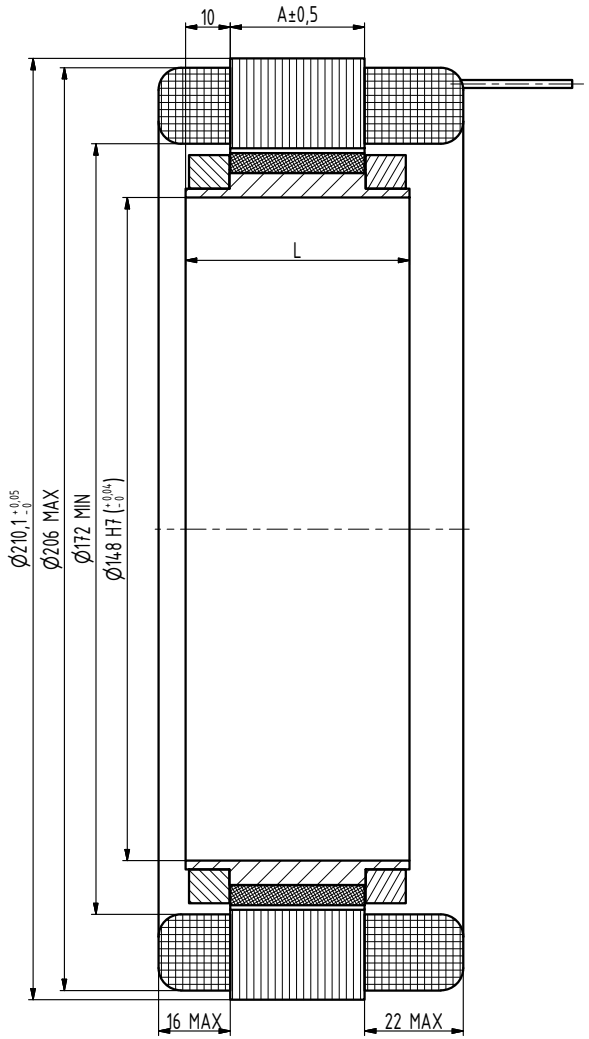

TYP	A	L
Q5-0280	30	50
Q5-0545	60	80
Q5-0810	90	110
Q5-1070	120	140
Q5-1340	150	170

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR. Šimík		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.		SCHVÁLIL Ošlejšek	19.10.2016	STARÝ V.	Č.V.

NÁZEV

Motor Q5

Q5000 00 Z

Listů List