
Engineering data (WIN -609)		
DC bus voltage	560	V DC
Nominal AC voltage	380	V AC (rms)
Rated voltage	325	V AC (rms)
Rated power	7.1	kW
Rated speed	400	rpm
Rated torque	170.00	Nm
Rated current	14.36	A (rms)
Peak torque	1032	Nm
Peak current	97.95	A (rms)
Stall torque	258	Nm
Stall current	20.34	A (rms)
No load speed	490	rpm
EMF constant ±10%	767	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	12.69	Nm / A (rms)
Torque constant ±10% @ rated load	11.84	Nm / A (rms)
Number of poles	40	
Electrical time constant	10.48	ms
Winding terminal resistance	0.58	Ω
Rotary field terminal inductance	6.08	mH

Customs info	
HS Code	85015220


Mechanical data (setting 6)		
Max mechanical speed	2500	rpm
Mech. time constant	0.76	ms
Thermal time constant	78	min
Rotor inertia	1215	kgcm²
Protection	IP00	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	32.1	kg

Sensors	
Temperature	PT1000 {PT1000}

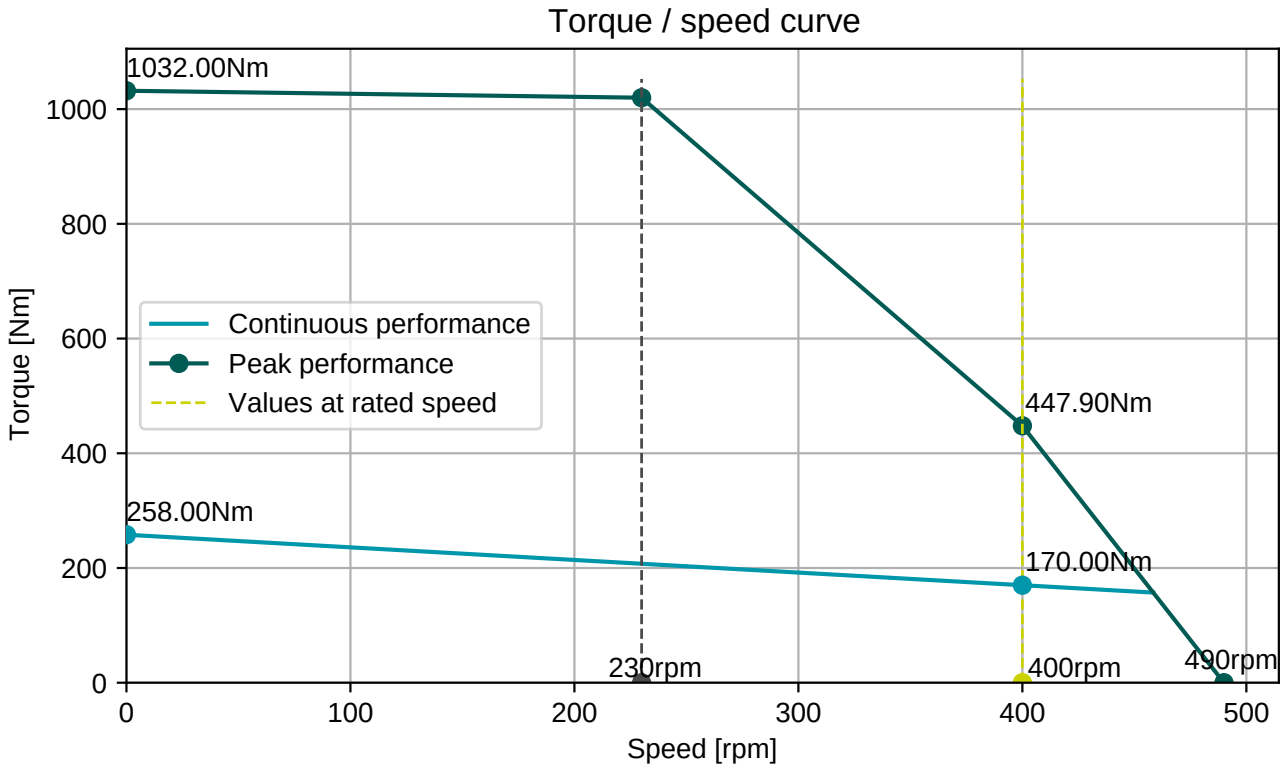

Connector 1 (259)	
white	U
blue	V
red	W

2x Therm
2x Brake

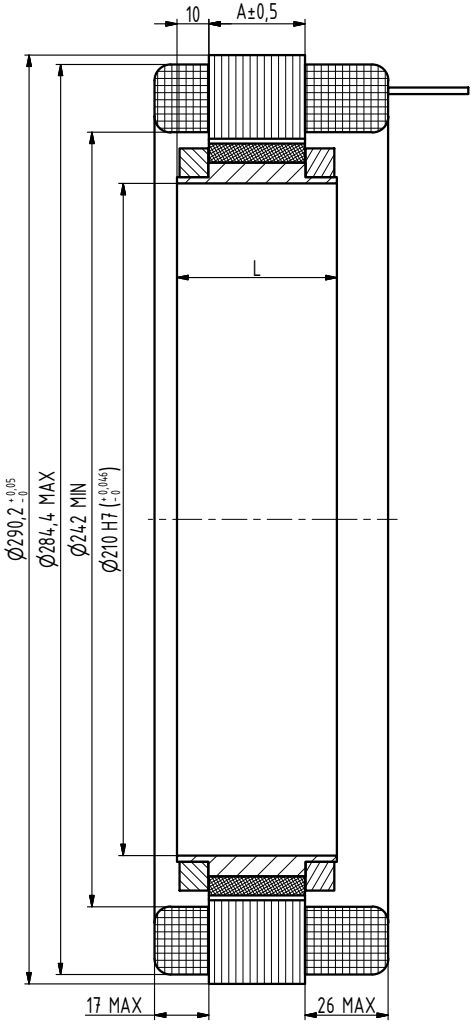

TYP	A	L
Q6-0600	30	50
Q6-1150	60	80
Q6-1650	90	110
Q6-2120	120	140
Q6-2580	150	170

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR. Šimík		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEZK.					
TECHNOL.		SCHVÁLIL Ošlejšek	19.10.2016	STARÝ V.	Č.V.

NÁZEV

Motor Q6

Q6000 00 Z

Listů List