
Engineering data (WIN 1321)		
DC bus voltage	24	V DC
Nominal AC voltage	17	V AC (rms)
Rated voltage	14	V AC (rms)
Rated power	274	W
Rated speed	25	rpm
Rated torque	104.50	Nm
Rated current	23.96	A (rms)
Peak torque	235.24	Nm
Peak current	57.4	A (rms)
Stall torque	105	Nm
Stall current	23.3	A (rms)
No load speed	60	rpm
EMF constant ±10%	273	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	4.515	Nm / A (rms)
Torque constant ±10% @ rated load	4.361	Nm / A (rms)
Number of poles	52	
Electrical time constant	9.63	ms
Winding terminal resistance	0.245	Ω
Rotary field terminal inductance	2.36	mH

Customs info	
HS Code	85015100


Mechanical data (setting 6)		
Max mechanical speed	2000	rpm
Mech. time constant	1.13	ms
Thermal time constant	58	min
Rotor inertia	545	kgcm²
Protection	IP00	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	12.4	kg

Sensors	
Temperature	PT1000 {PT1000}

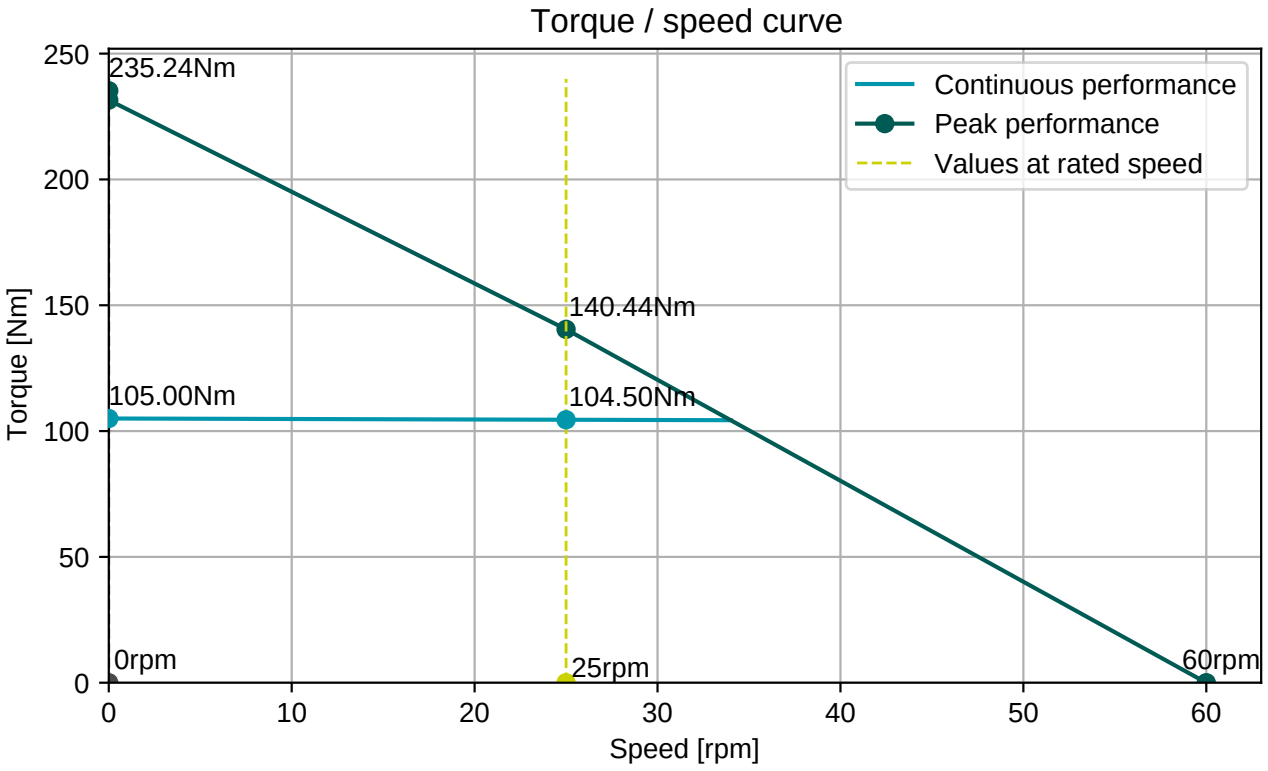

Connector 1 (259)	
white	U
blue	V
red	W

2x Therm
2x Brake

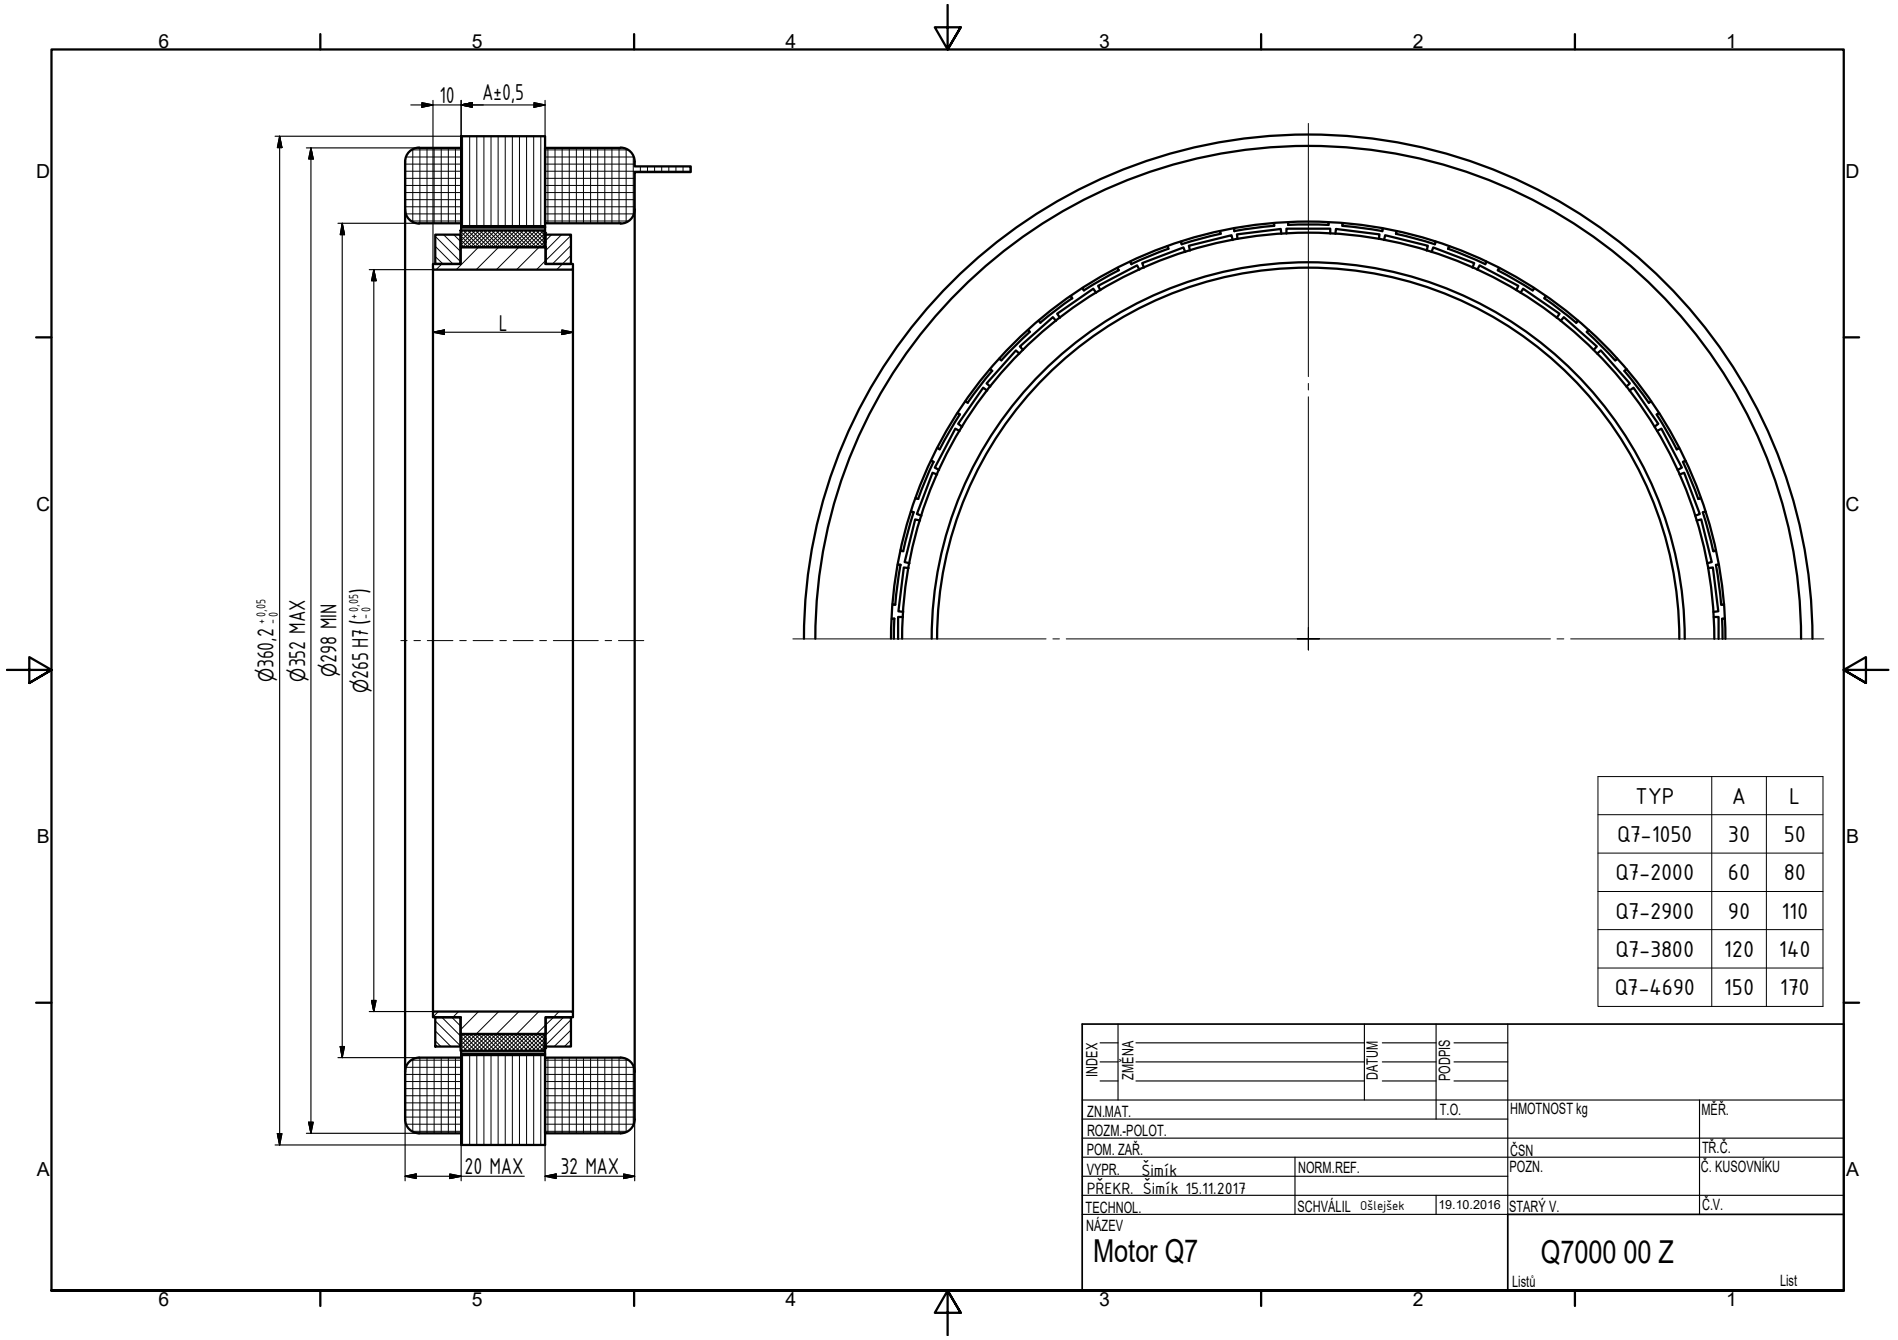

TYP	A	L
Q7-1050	30	50
Q7-2000	60	80
Q7-2900	90	110
Q7-3800	120	140
Q7-4690	150	170

INDEX	ZMĚNA	DATUM	PODPIS

ZN.MAT.		T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.				
POM. ZAŘ.			ČSN	TŘ.Č.
VYPR. Šimík	NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR. Šimík 15.11.2017				
TECHNOL.	SCHVÁLIL Ošlejšek	19.10.2016	STARÝ V.	Č.V.

NÁZEV
Motor Q7

Q7000 00 Z

Listů List