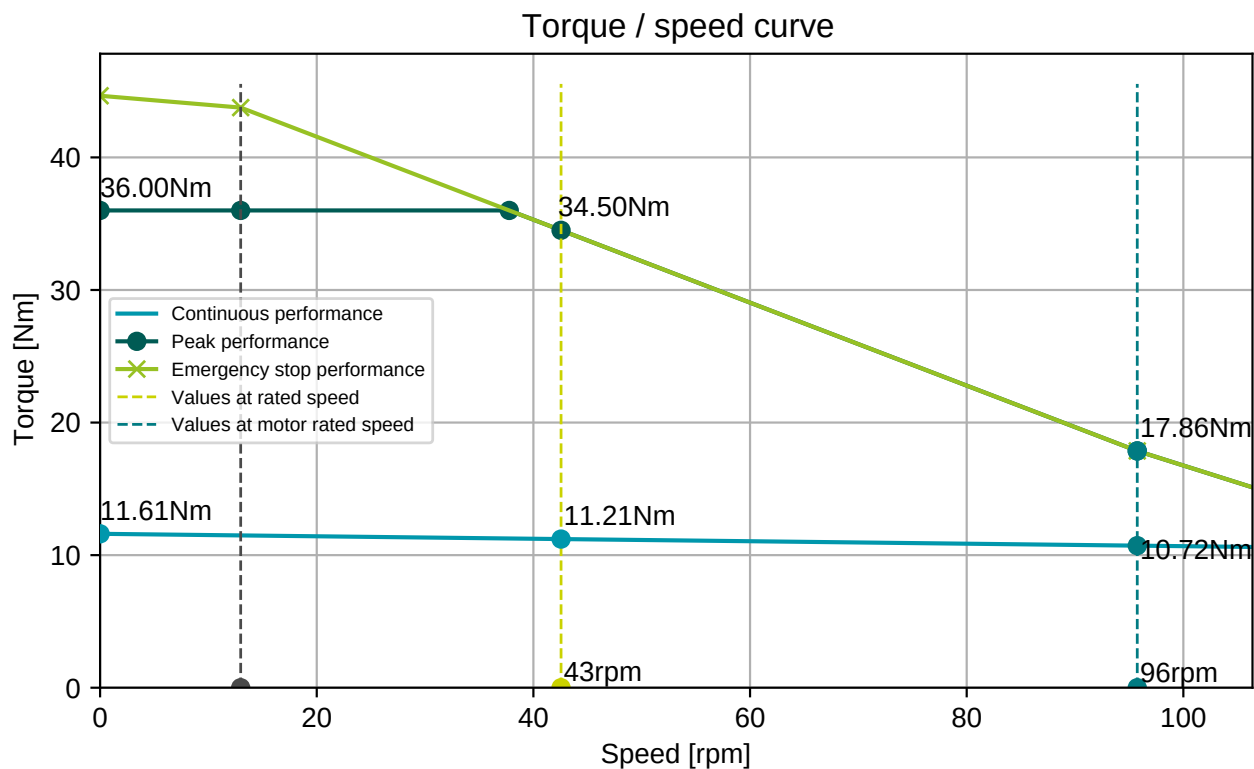
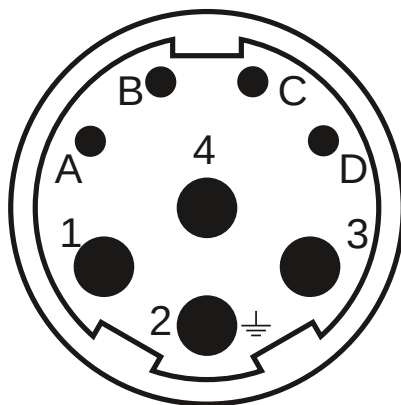


Engineering motordata (WIN 1382)		Mechanical motor data (setting 48)	
DC bus voltage	36 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	25 V AC (rms)	Mech. time constant	2.76 ms
Rated voltage	21 V AC (rms)	Thermal time constant	12 min
Rated power	113 W	Rotor inertia	0.05 kgcm ²
Rated speed	4500 rpm	Protection	IP64
Rated torque	0.24 Nm	Color	RAL 9005
Rated current	5.2 A (rms)	Cooling	Convection
Peak torque	1 Nm	Motor-only mass	0.6 kg
Peak current	22.2 A (rms)	Sensors	
Stall torque	0.26 Nm	Temperature	PT1000 {PT1000}
Stall current	5 A (rms)	Feedback	EKS36 (HDSL) single-turn, 18 bits, SIL2
No load speed	7750 rpm	Brake	
EMF constant ±10%	3.13 V AC (rms) / 1000rpm	Braking torque	0.40 Nm
Theoretical torque constant ±10%	0.052 Nm / A (rms)	Voltage	24 V DC
Torque constant ±10% @ rated load	0.046 Nm / A (rms)	Power @20°C	8.0 W
Number of poles	6	Current @20°C	0.33 A
Electrical time constant	1.05 ms	Inertia	0.02 kgcm ²
Winding terminal resistance	0.855 Ω	Mass	0.10 kg
Rotary field terminal inductance	0.9 mH	Customs info	
HS Code	85015100		


Gearbox engineering data		Gearbox mechanical data	
Gear ratio	47	Max. radial force	1440 N
Efficiency	95 %*	Max. axial force	1900 N
Torsional stiffness	2.5 Nm/arcmin	Output shaft design	Flange
Rated output torque	18 Nm	Mass	0.47 kg
Max output torque	36 Nm	Input inertia	0.007 kgcm ²
Emergency output torque	90 Nm	Protection	IP64
Rated input speed	2000 rpm	Actuator data	
Max input speed	5000 rpm	Rated speed	43 rpm
Operating temperature	<-25; 50> °C	Rated torque	11.21 Nm
Max. backlash	< 1.5 arcmin	Peak torque	36.00 Nm
Service life	6000 h	Emergency stop torque	47.00 Nm
<i>* at rated speed & torque</i>		EMF constant ±10%	147.1 V AC (rms) / 1000rpm
Lubrication		Torque constant ±10% @ rated load	2.06 Nm / A (rms)
Type	Standard	Total mass	1.17 kg
Lubricant	TRIBOL GR TT 1 PD	Output inertia	125.9 kgcm ²


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

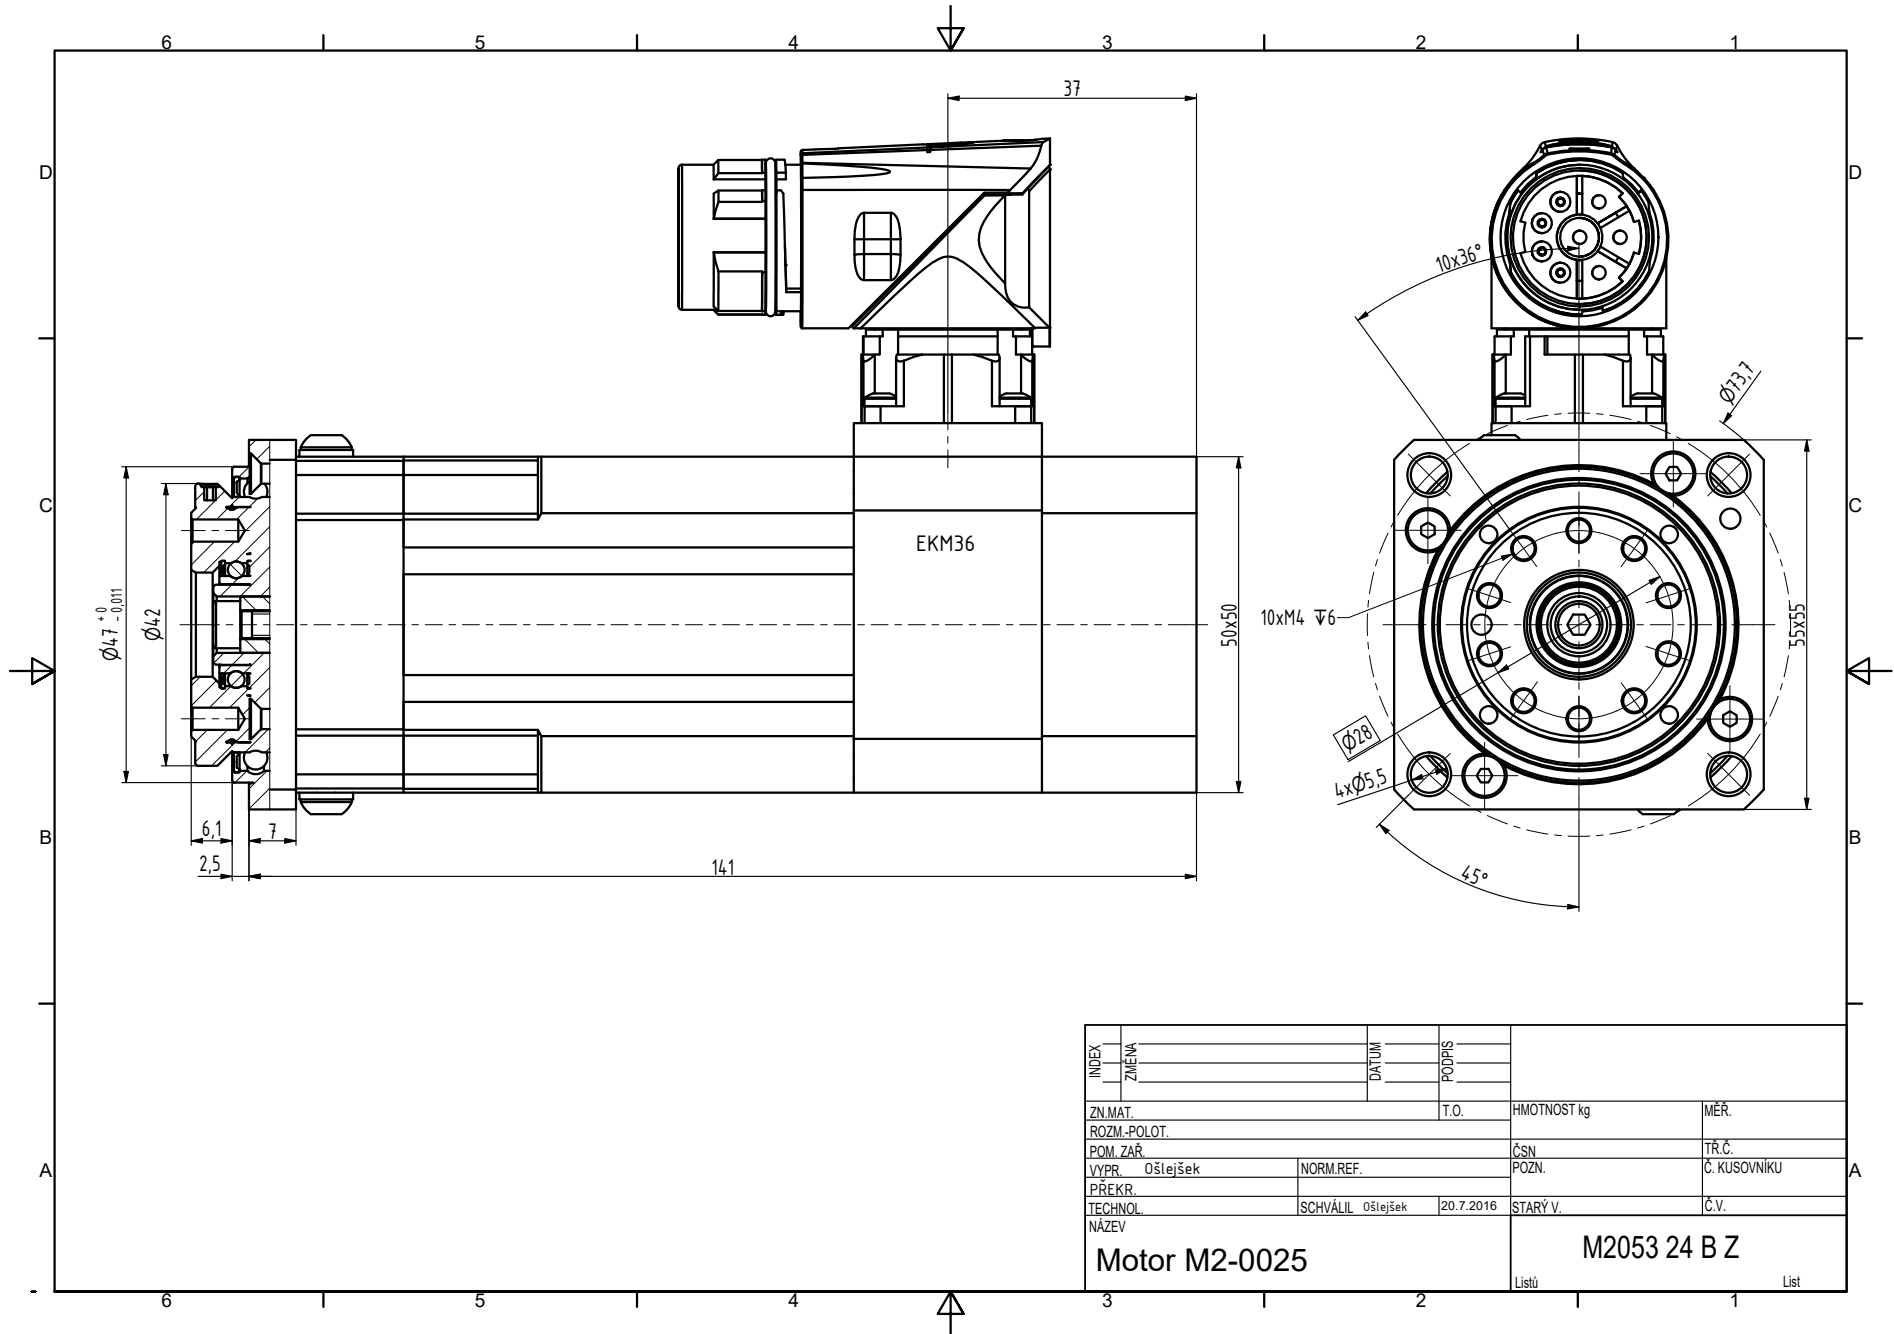

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.		T.O.		HMOTNOST kg	MĚŘ.
ROZM.-POLOT.				ČSN	TR.Č.
POM. ZAŘ.				POZN.	Č. KUSOVNIKU
VYPR.	Ošlejšek	NORM.REF.			Č.V.
PŘEKR.					
TECHNOL.	SCHVÁLIL	Ošlejšek	20.7.2016	STARÝ V.	
NÁZEV				M2053 24 B Z	
Motor M2-0025				Listů	List