Engineering data (WIN 1417)		
DC bus voltage	320	V DC
Nominal AC voltage	220	V AC (rms)
Rated voltage	148	V AC (rms)
Rated power	346	W
Rated speed	3000	rpm
Rated torque	1.10	Nm
Rated current	1.73	A (rms)
Peak torque	4.94	Nm
Peak current	8.3	A (rms)
Stall torque	1.3	Nm
Stall current	1.77	A (rms)
No load speed	4910	rpm
EMF constant ±10%	44.5	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.736	Nm / A (rms)
Torque constant ±10% @ rated load	0.636	Nm / A (rms)
Number of poles	10	
Electrical time constant	1.44	ms
Winding terminal resistance	9.598	Ω
Rotary field terminal inductance	13.8	mH


Customs info	
HS Code	85015100

Mechanical data (setting 48)		
Max mechanical speed	12000	rpm
Mech. time constant	1.53	ms
Thermal time constant	24	min
Rotor inertia	0.5	kgcm²
Protection	IP67	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	1.6	kg
Max. axial force 20kh	60	N
Max. radial force 20kh*	334	N
Max. axial force 100kh	36	N
Max. radial force 100kh*	191	N

** Defined for point of action at ½ output shaft length*

Sensors	
Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2


Torque / speed curve

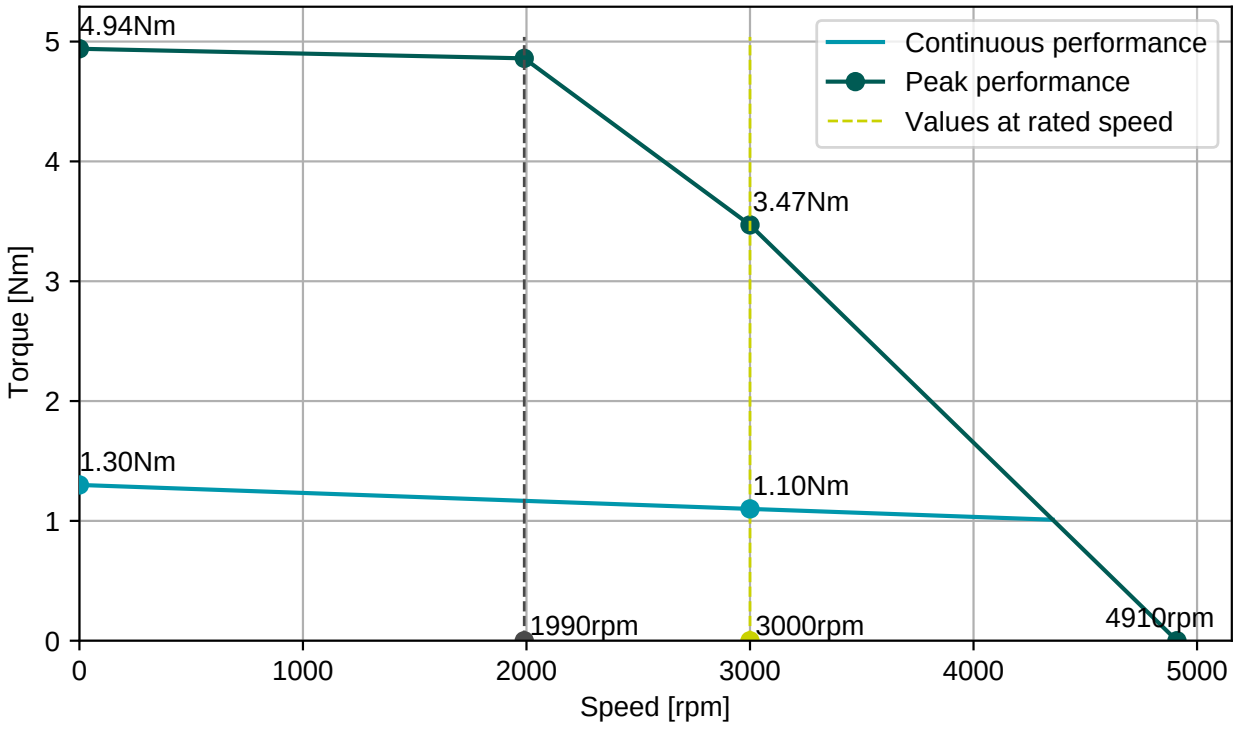

Cable DSL4x1 (2x0,25) , D=10,3±0,4mm

Connector 1 (306)	
1	U
2	V
3	W
PE	PE
5	Brake+
6	Brake-
brown	+Us/DSL+
white	GND/DSL-

Numbers printed on the cables

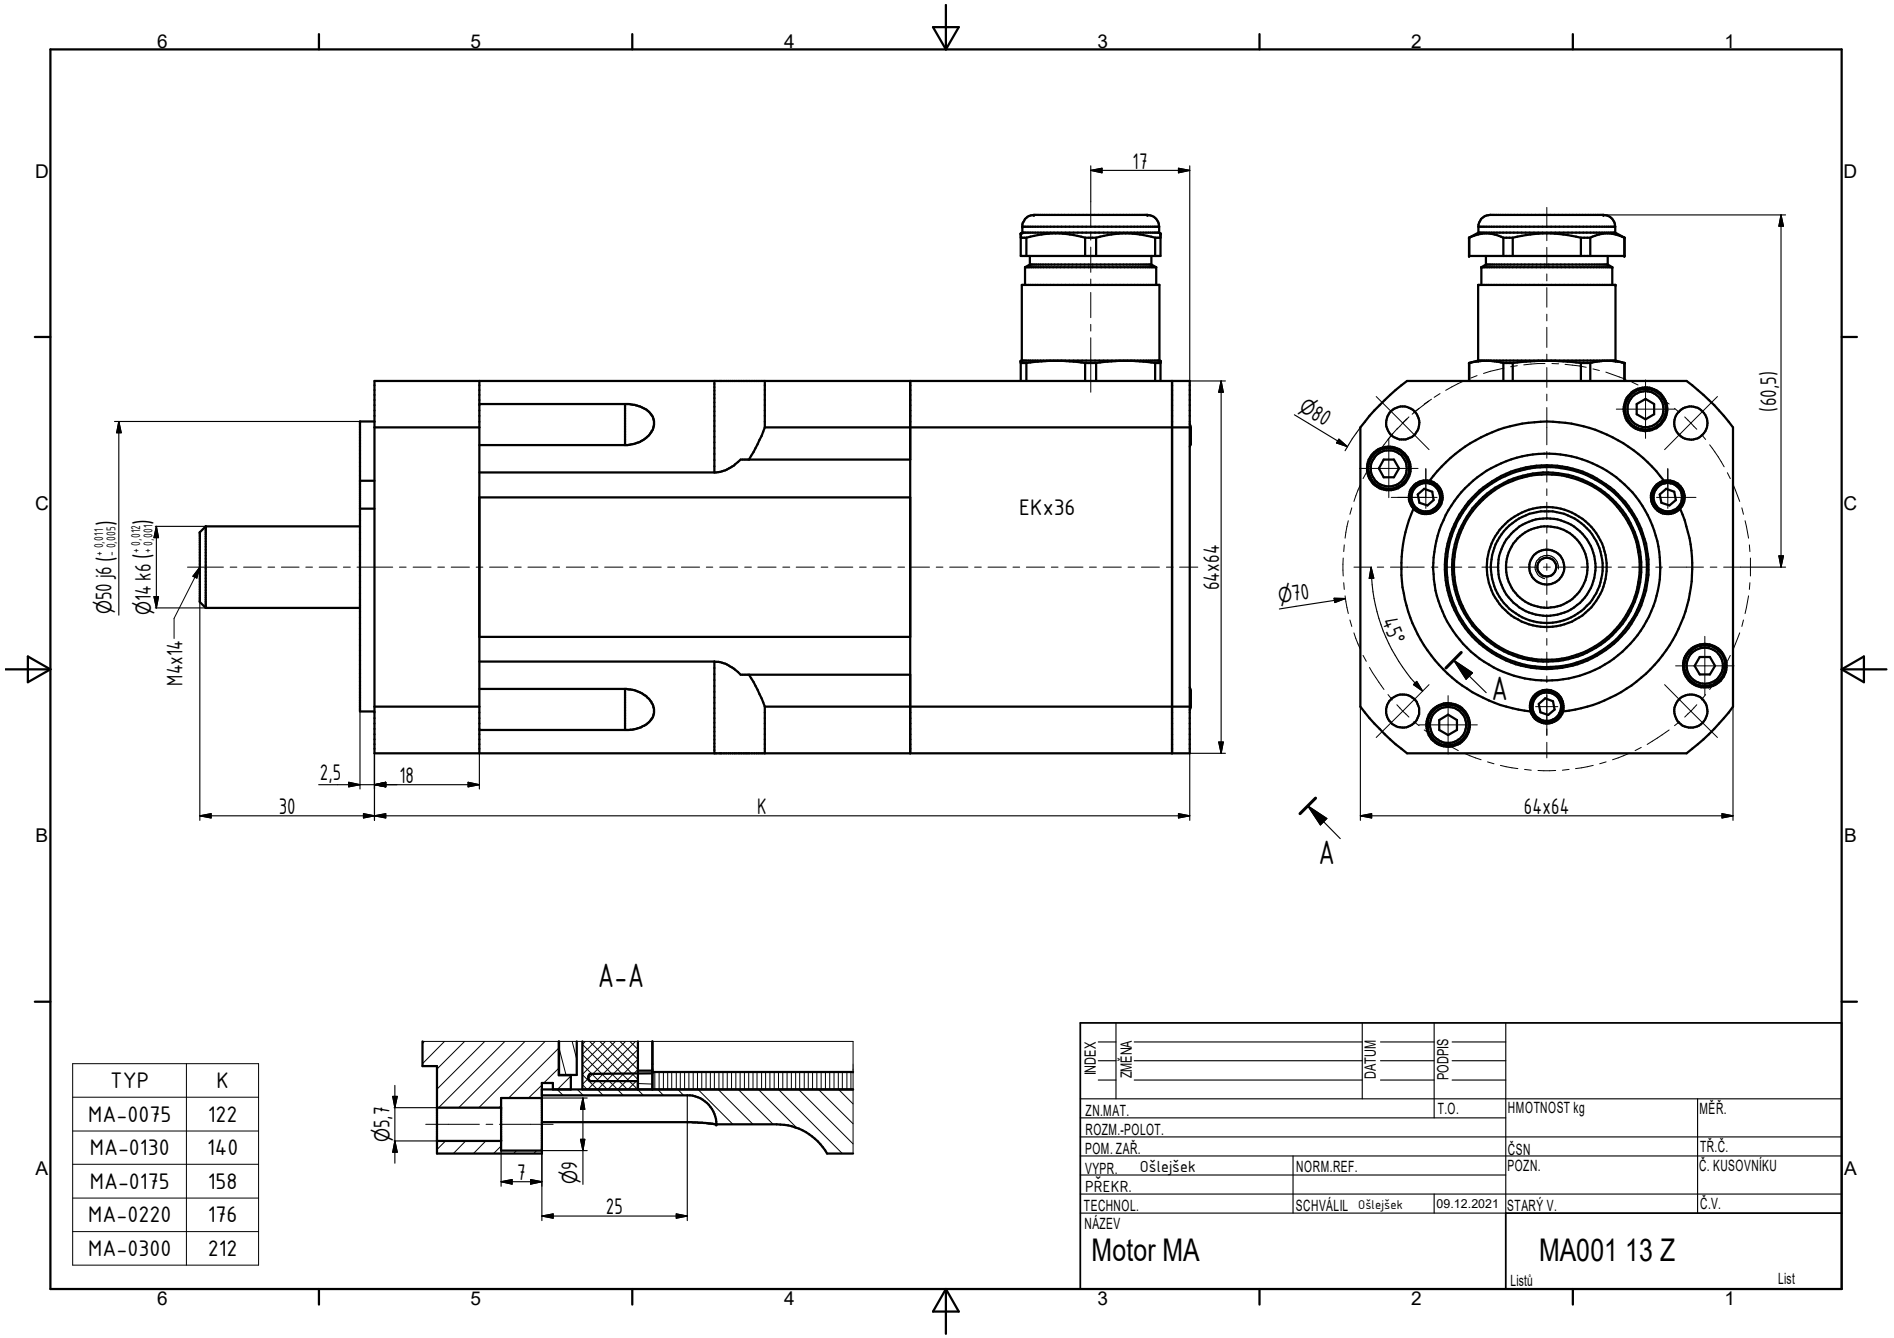

TYP	K
MA-0075	122
MA-0130	140
MA-0175	158
MA-0220	176
MA-0300	212

INDEX	ZMĚNA	DATUM	PODPIS

ZN.MAT.		T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.				
POM. ZAŘ.			ČSN	TŘ.Č.
VYPR. Ošlejšek	NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.				
TECHNOL.	SCHVÁLIL Ošlejšek	09.12.2021	STARÝ V.	Č.V.

NÁZEV

Motor MA

MA001 13 Z

Listů List