

Engineering data (WIN 757)

DC bus voltage	320 V DC
Nominal AC voltage	220 V AC (rms)
Rated voltage	114 V AC (rms)
Rated power	118 W
Rated speed	4500 rpm
Rated torque	0.25 Nm
Rated current	0.96 A (rms)
Peak torque	1.12 Nm
Peak current	4.4 A (rms)
Stall torque	0.28 Nm
Stall current	0.97 A (rms)
No load speed	12260 rpm
EMF constant ±10%	17.5 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.29 Nm / A (rms)
Torque constant ±10% @ rated load	0.26 Nm / A (rms)
Number of poles	6
Electrical time constant	1.00 ms
Winding terminal resistance	26.9 Ω
Rotary field terminal inductance	26.8 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	2.78 ms
Thermal time constant	10 min
Rotor inertia	0.05 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Motor-only mass	0.9 kg
Max. axial force 20kh	41 N
Max. radial force 20kh	216 N*
Max. axial force 100kh	24 N
Max. radial force 100kh	126 N*


* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 18+12 bits, SIL2

Brake

Braking torque	2.00 Nm
Voltage	24 V DC
Power @20°C	11.0 W
Current @20°C	0.46 A
Inertia	0.08 kgcm ²
Mass	0.20 kg

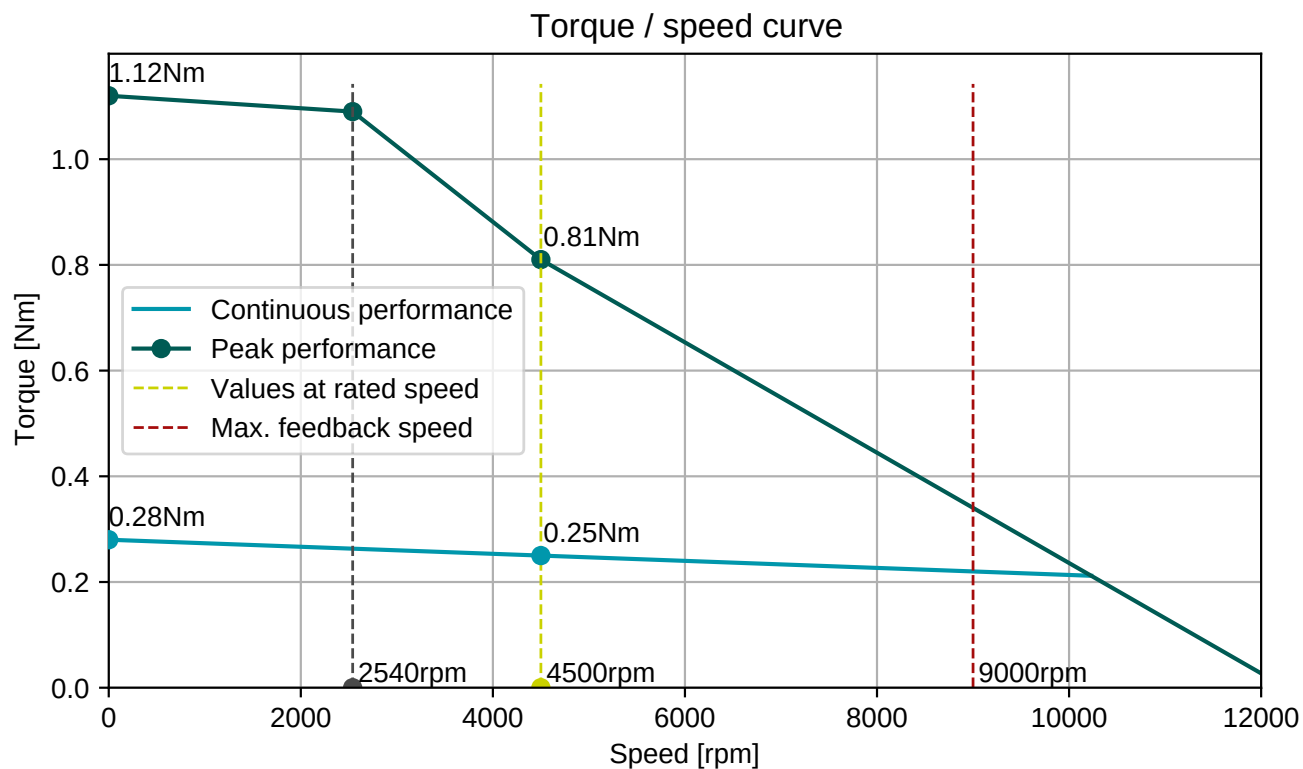

BGC110N00001216000

M23, 8 poles, rotary



Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

