Engineering motordata (WIN 771)		
DC bus voltage	560	V DC
Nominal AC voltage	380	V AC (rms)
Rated voltage	289	V AC (rms)
Rated power	2.3	kW
Rated speed	2000	rpm
Rated torque	11.20	Nm
Rated current	5.98	A (rms)
Peak torque	36	Nm
Peak current	20.9	A (rms)
Stall torque	12	Nm
Stall current	5.7	A (rms)
No load speed	2960	rpm
EMF constant ±10%	128	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	2.12	Nm / A (rms)
Torque constant ±10% @ rated load	1.87	Nm / A (rms)
Number of poles	10	
Electrical time constant	8.05	ms
Winding terminal resistance	2.66	Ω
Rotary field terminal inductance	21.4	mH

Customs info	
HS Code	85015220

Mechanical motor data (setting 48)		
Max mechanical speed	9000	rpm
Mech. time constant	0.81	ms
Thermal time constant	45	min
Rotor inertia	7.9	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	7.5	kg
Max. axial force 20kh	126	N
Max. radial force 20kh*	665	N
Max. axial force 100kh	74	N
Max. radial force 100kh*	389	N

** Defined for point of action at ½ output shaft length*

Sensors	
Temperature	PT1000 {PT1000}
Feedback	EDS35 (HDSL) single-turn, 24 bits

Gearbox engineering data		
Gear ratio	50	
Efficiency*	94	%
Torsional stiffness	241	Nm/arcmin
Number of stages	2	
Rated output torque	310	Nm
Cycling output torque	620	Nm
Max output torque	1000	Nm
Emergency output torque	1200	Nm
Rated input speed	3500	rpm
Max input speed	8500	rpm
Operating temperature	<-25; 90>	°C
Max. backlash	< 1	arcmin
Service life	20000	h


** at rated speed & torque*

Gearbox mechanical data		
Radial force for 20'000h	12000	N
Radial force for 30'000h	11000	N
Max. radial force	12000	N
Axial force for 20'000h	8500	N
Axial force for 30'000h	7500	N
Max. axial force	8500	N
Tilting moment for 20'000h	1219	Nm
Tilting moment for 30'000h	1117	Nm
Max. bending moment	80	Nm
Output shaft design	Flange	
Mass	14.37	kg
Input inertia	1.977	kgcm²
Protection	IP65	

Lubrication	
Type	Standard
Lubricant	Castrol Optigear Synthetic 800/150


Actuator data		
Rated speed	40	rpm
Rated torque	310.00	Nm
Cycling torque	620.00	Nm
Peak torque	1000.00	Nm
Emergency stop torque	1200.00	Nm
EMF constant ±10%	6400.0	V AC (rms) / 1000rpm
Torque constant ±10% @ rated load	88.03	Nm / A (rms)
Total mass	21.87	kg
Output inertia	24692.5	kgcm²

Torque / speed curve

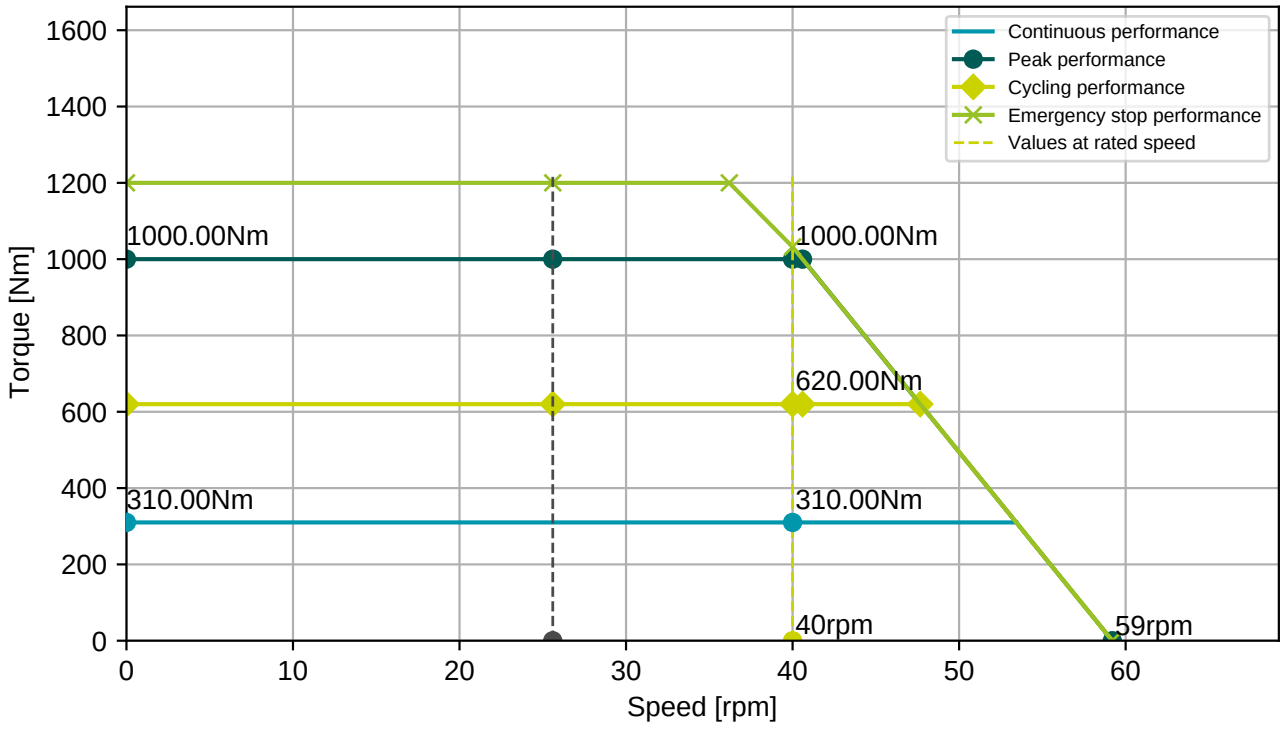


BGC110N00001216000

M23, 8 poles, rotary

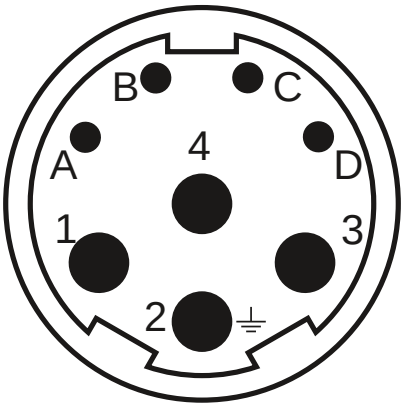

Connector 1 (283)	
1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

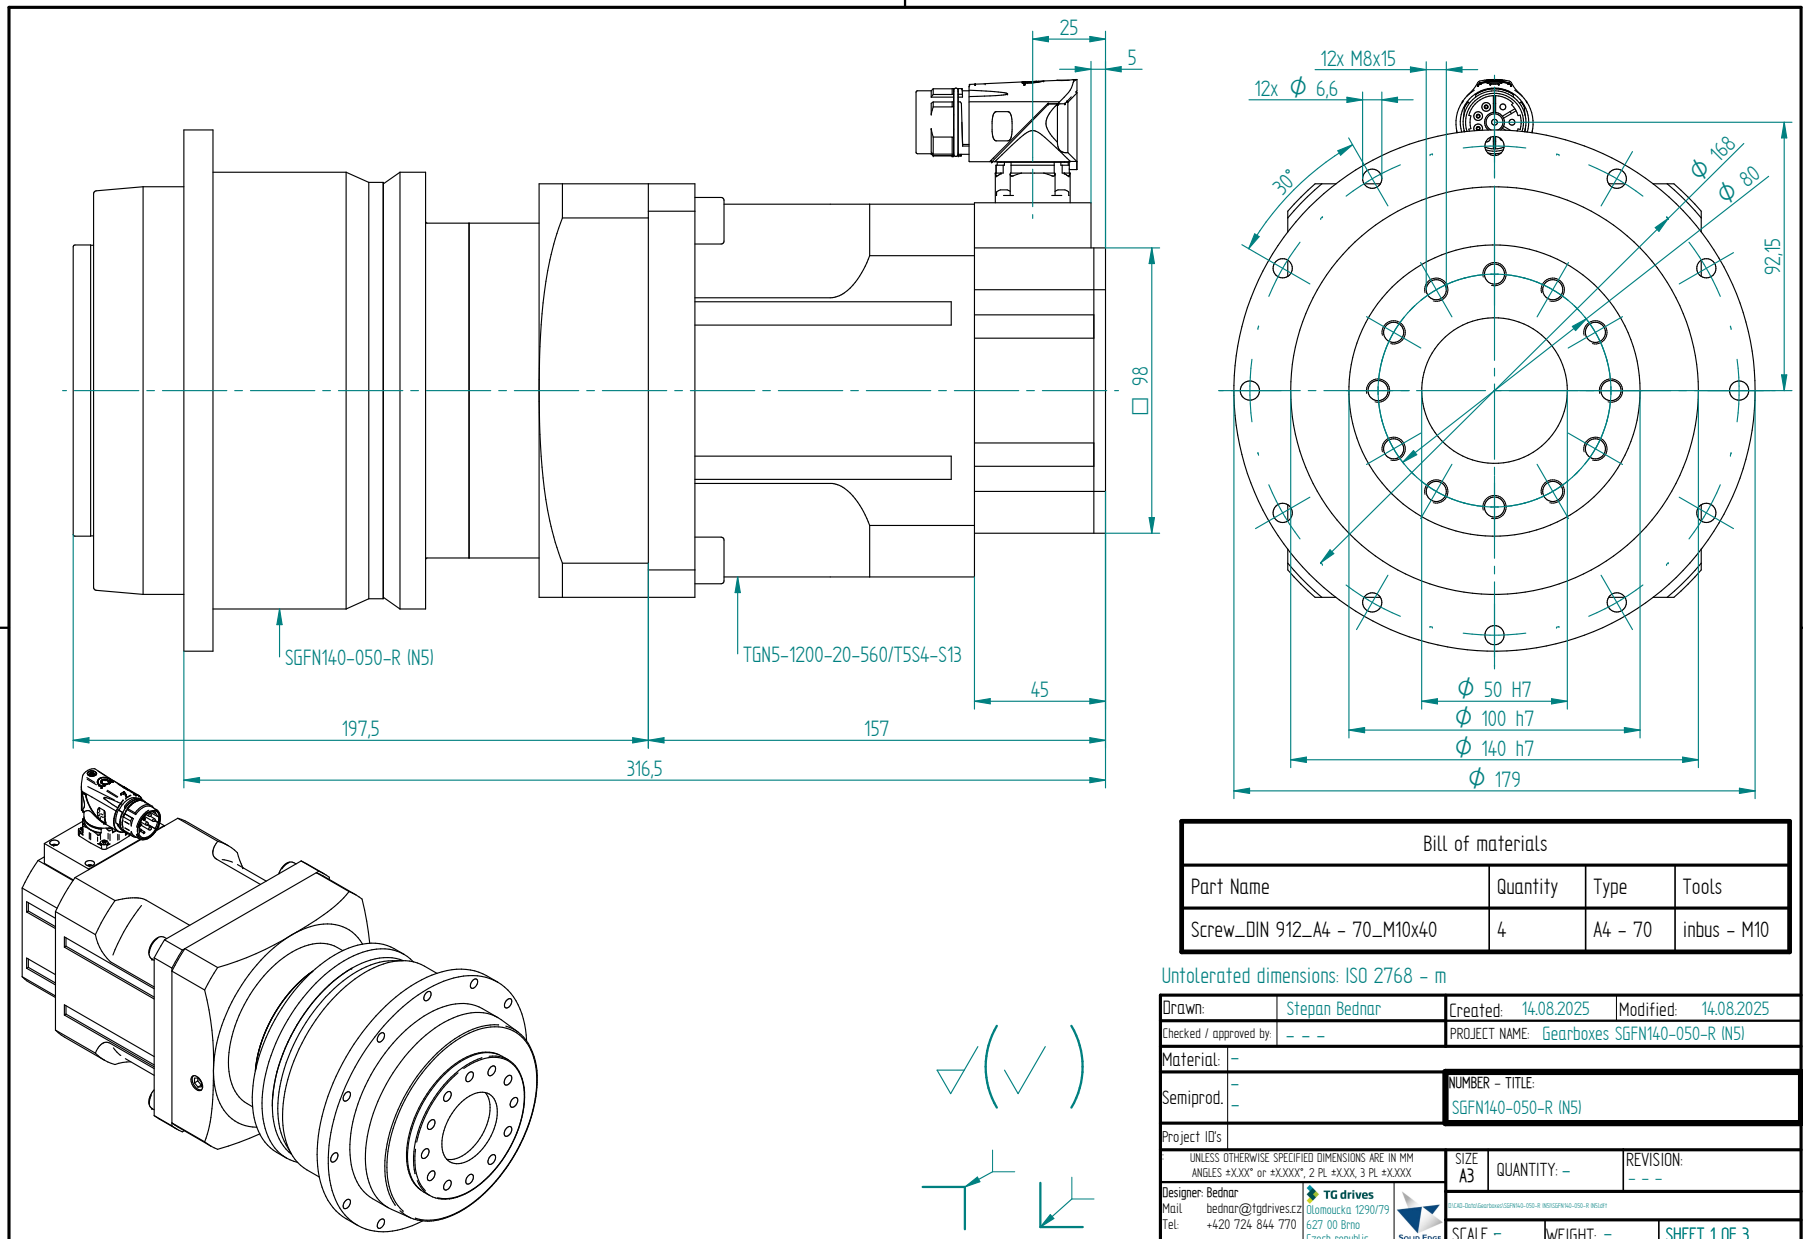

Bill of materials			
Part Name	Quantity	Type	Tools
Screw_DIN 912_A4 - 70_M10x40	4	A4 - 70	inbus - M10

Untolerated dimensions: ISO 2768 - m

Drawn:	Stepan Bednar	Created: 14.08.2025	Modified: 14.08.2025
Checked / approved by:	- - -	PROJECT NAME: Gearboxes SGFN140-050-R (N5)	
Material:	-		
Semiprod.	-	NUMBER - TITLE: SGFN140-050-R (N5)	
Project ID's			


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM
ANGLES ±X.XX° or ±X.XXX", 2 PL ±X.XX, 3 PL ±X.XXX

SIZE A3 | QUANTITY: - | REVISION: - - -

Designer: Bednar
Mail bednar@tgdrives.cz
Tel. +420 724 844 770

TG drives
Olomoucka 1290/79
627 00 Brno
Czech republic

SCALE :- | WEIGHT: - | SHEET 1 OF 3

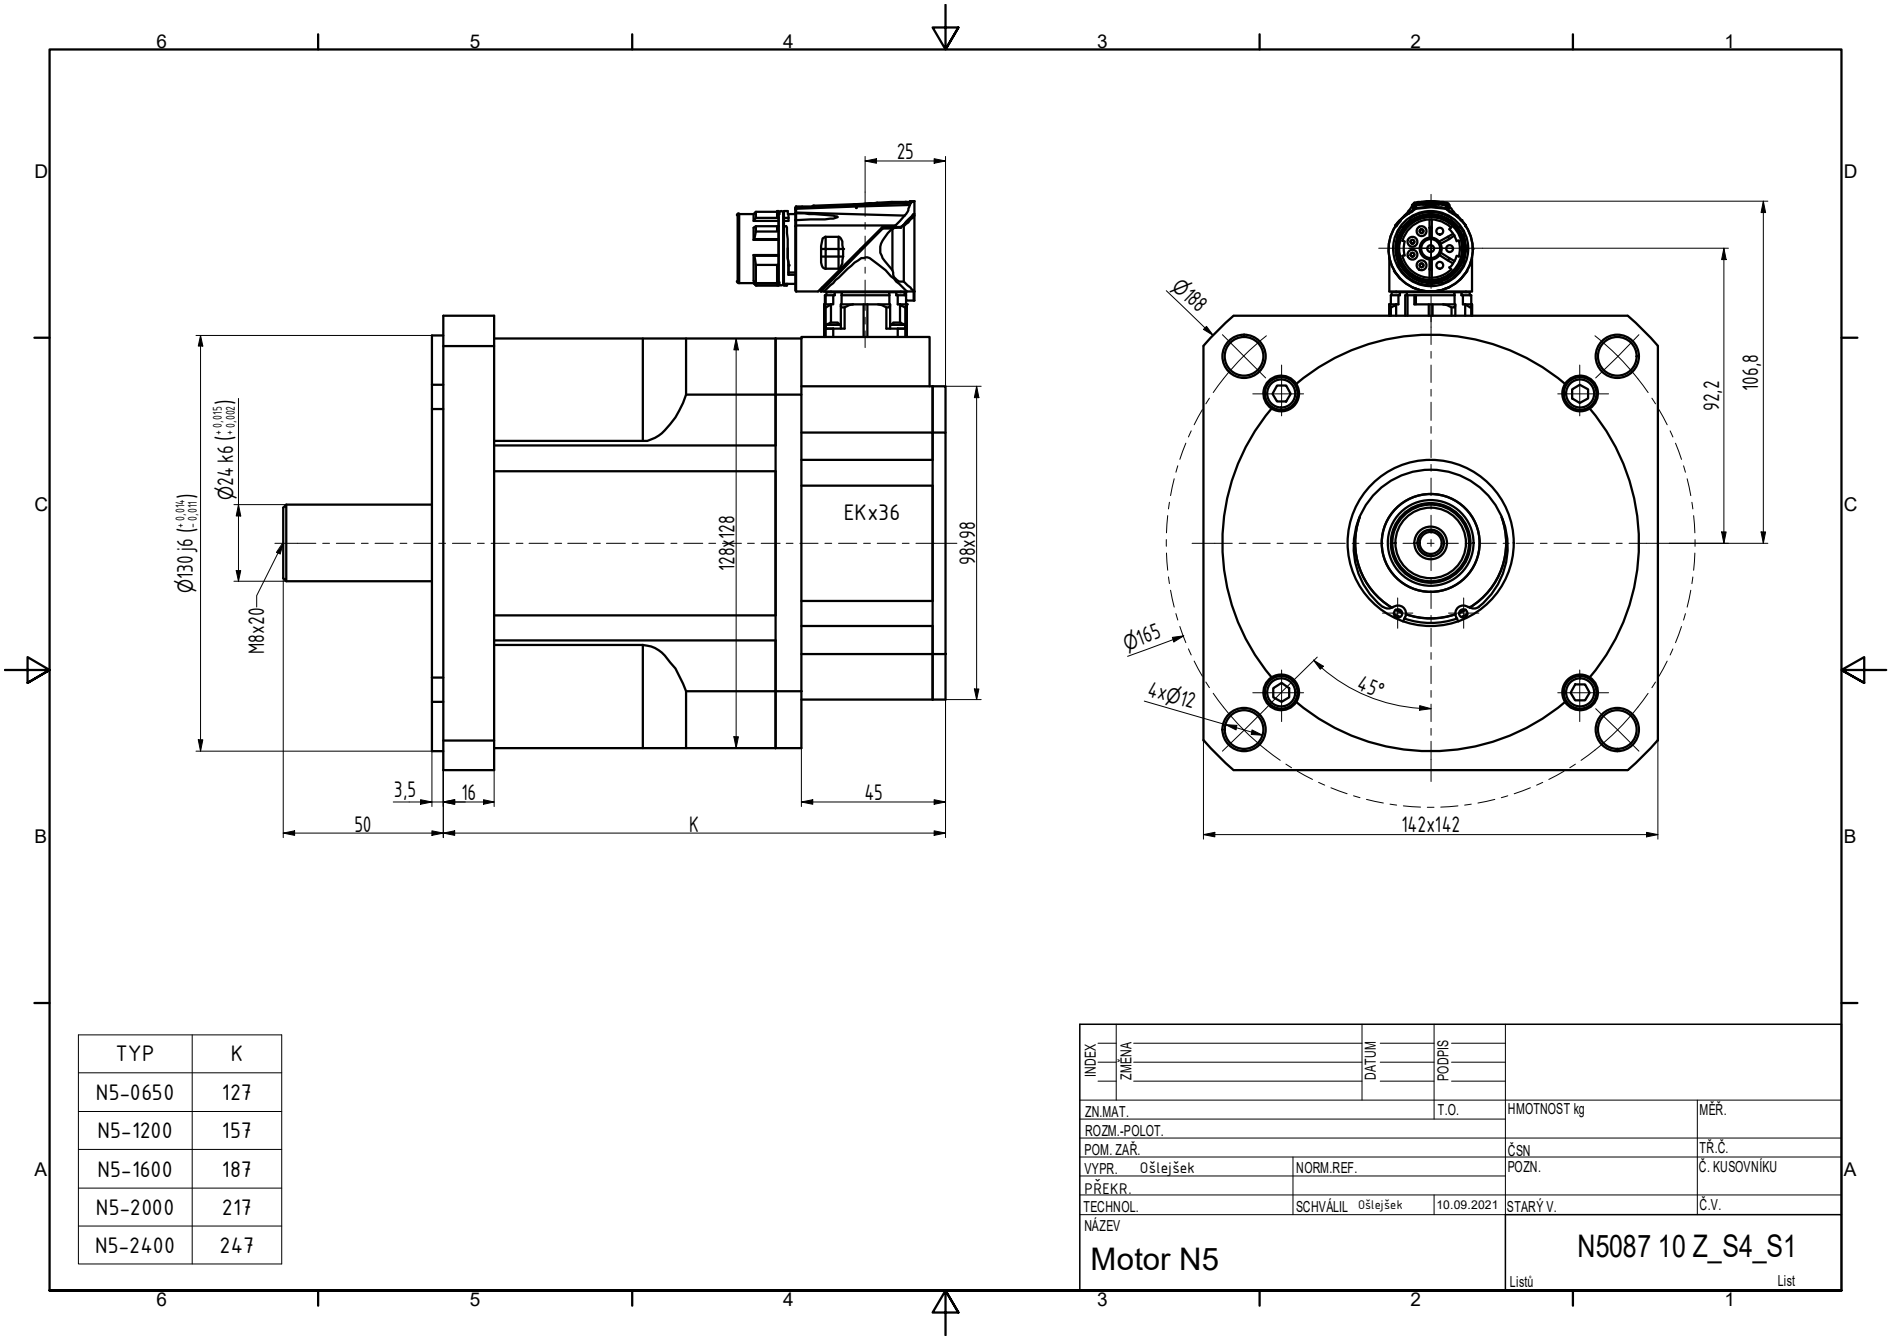

TYP	K
N5-0650	127
N5-1200	157
N5-1600	187
N5-2000	217
N5-2400	247


INDEX	ZMĚNA	DATUM	PODPIS

ZN.MAT.		T.O.		HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR. Ošlejšek	NORM.REF.			POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.	SCHVÁLIL Ošlejšek	10.09.2021		STARÝ V.	Č.V.

NÁZEV
Motor N5

N5087 10 Z_S4_S1

Listů List

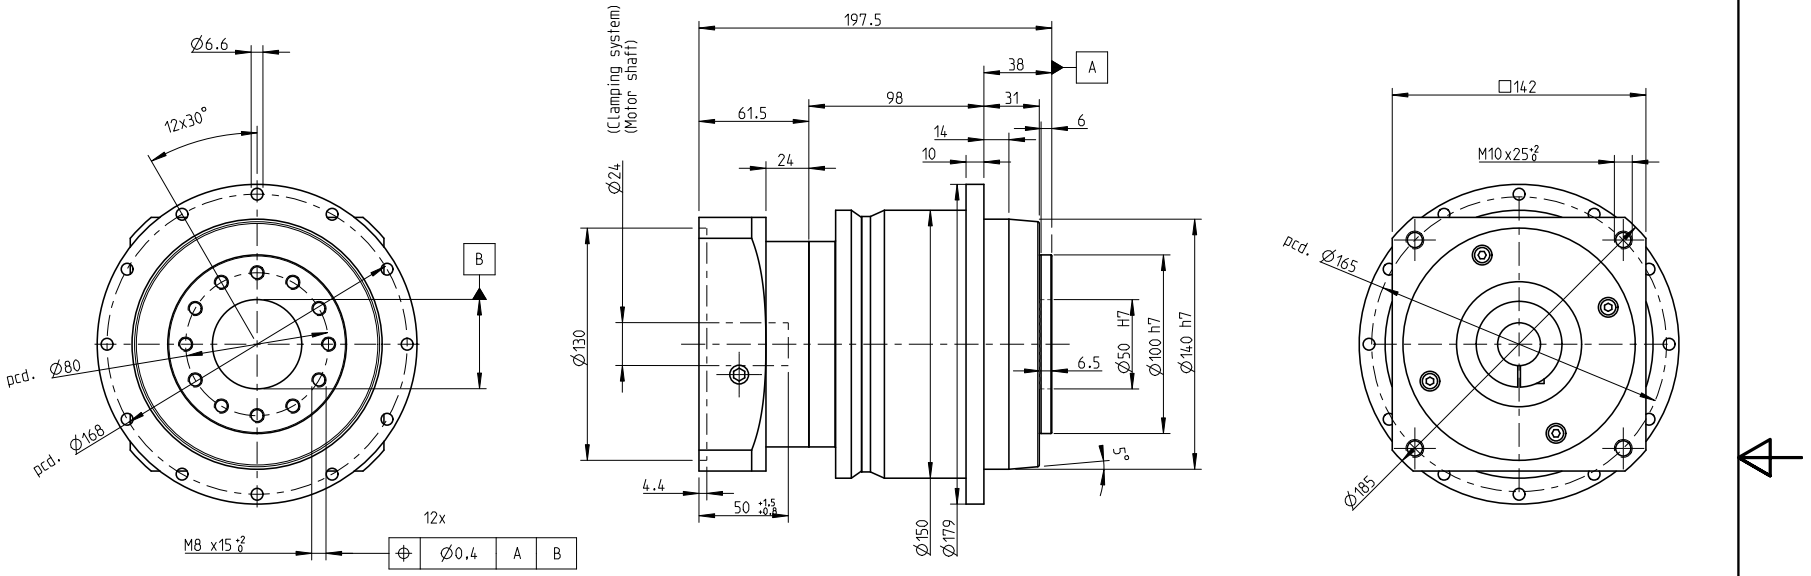

INDEX	ZMĚNA	DATUM	PODPIS	

ZM.MAT.		T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.				
ROZM. ZAŘ.			ČSN	TŘ.Č.
VYPR.	NORM. REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.				
TECHNOL.	SCHVÁLIL.	12.9.2020	STARÝ V.	Č.V.

NÁZEV

Gearbox SGFN140

TGN5, TGH5, TGT5

Listů List