Engineering motordata (WIN 1239)		
DC bus voltage	320	V DC
Nominal AC voltage	220	V AC (rms)
Rated voltage	187	V AC (rms)
Rated power	1.5	kW
Rated speed	4500	rpm
Rated torque	3.10	Nm
Rated current	5.15	A (rms)
Peak torque	14.4	Nm
Peak current	24.8	A (rms)
Stall torque	4.8	Nm
Stall current	6.9	A (rms)
No load speed	5230	rpm
EMF constant ±10%	42	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.695	Nm / A (rms)
Torque constant ±10% @ rated load	0.602	Nm / A (rms)
Number of poles	10	
Electrical time constant	3.05	ms
Winding terminal resistance	1.234	Ω
Rotary field terminal inductance	3.76	mH

Customs info	
HS Code	85015220

Mechanical motor data (setting 48)		
Max mechanical speed	12000	rpm
Mech. time constant	0.67	ms
Thermal time constant	30	min
Rotor inertia	1.52	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	3.8	kg
Max. axial force 20kh	75	N
Max. radial force 20kh*	392	N
Max. axial force 100kh	44	N
Max. radial force 100kh*	229	N

** Defined for point of action at ½ output shaft length*

Sensors	
Temperature	PT1000 {PT1000}
Feedback	EES37 (HDSL) single-turn, 17 bits

Gearbox engineering data		
Gear ratio	8	
Efficiency*	97	%
Torsional stiffness	8	Nm/arcmin
Number of stages	1	
Rated output torque	42	Nm
Cycling output torque	50	Nm
Max output torque	80	Nm
Emergency output torque	190	Nm
Rated input speed	4000	rpm
Max input speed	7000	rpm
Operating temperature	<-25; 90>	°C
Max. backlash	< 7	arcmin
Service life	20000	h

** at rated speed & torque*


Lubrication	
Type	Standard
Lubricant	Klübersynth GE 14-112

Gearbox mechanical data		
Radial force for 20'000h*	750	N
Radial force for 30'000h*	650	N
Max. radial force*	1250	N
Axial force for 20'000h	1000	N
Axial force for 30'000h	900	N
Max. axial force	1600	N
Tilting moment for 20'000h	31	Nm
Tilting moment for 30'000h	27	Nm
Max. bending moment	16	Nm
Output shaft design	Shaft key	
Mass	2.13	kg
Input inertia	0.37	kgcm²
Protection	IP54	

** Defined for point of action at ½ output shaft length*


Actuator data		
Rated speed	500	rpm
Rated torque	25.52	Nm
Cycling torque	50.00	Nm
Peak torque	80.00	Nm
Emergency stop torque	115.20	Nm
EMF constant ±10%	336.0	V AC (rms) / 1000rpm
Torque constant ±10% @ rated load	4.67	Nm / A (rms)
Total mass	5.93	kg
Output inertia	121.0	kgcm²

Torque / speed curve

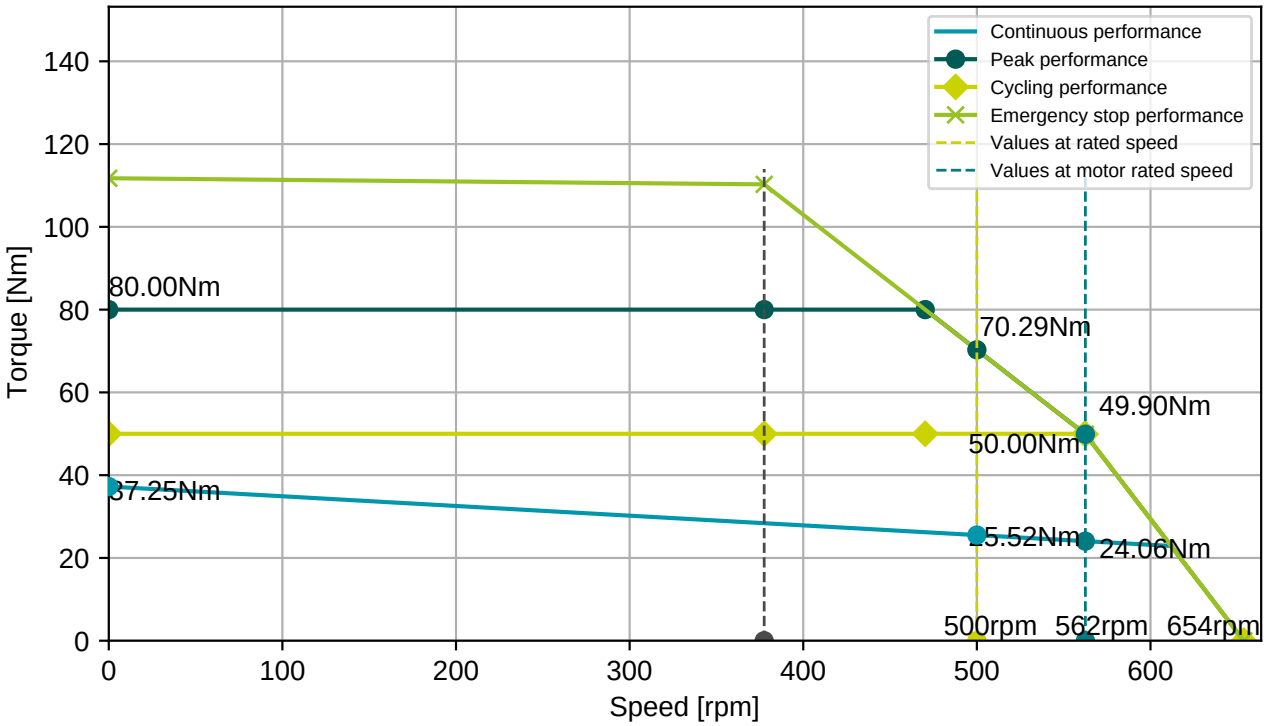


BGC110N00001216000

M23, 8 poles, rotary

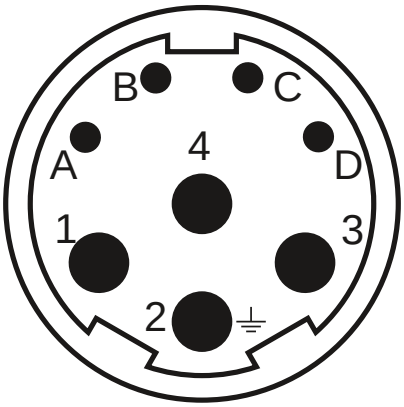

Connector 1 (283)	
1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

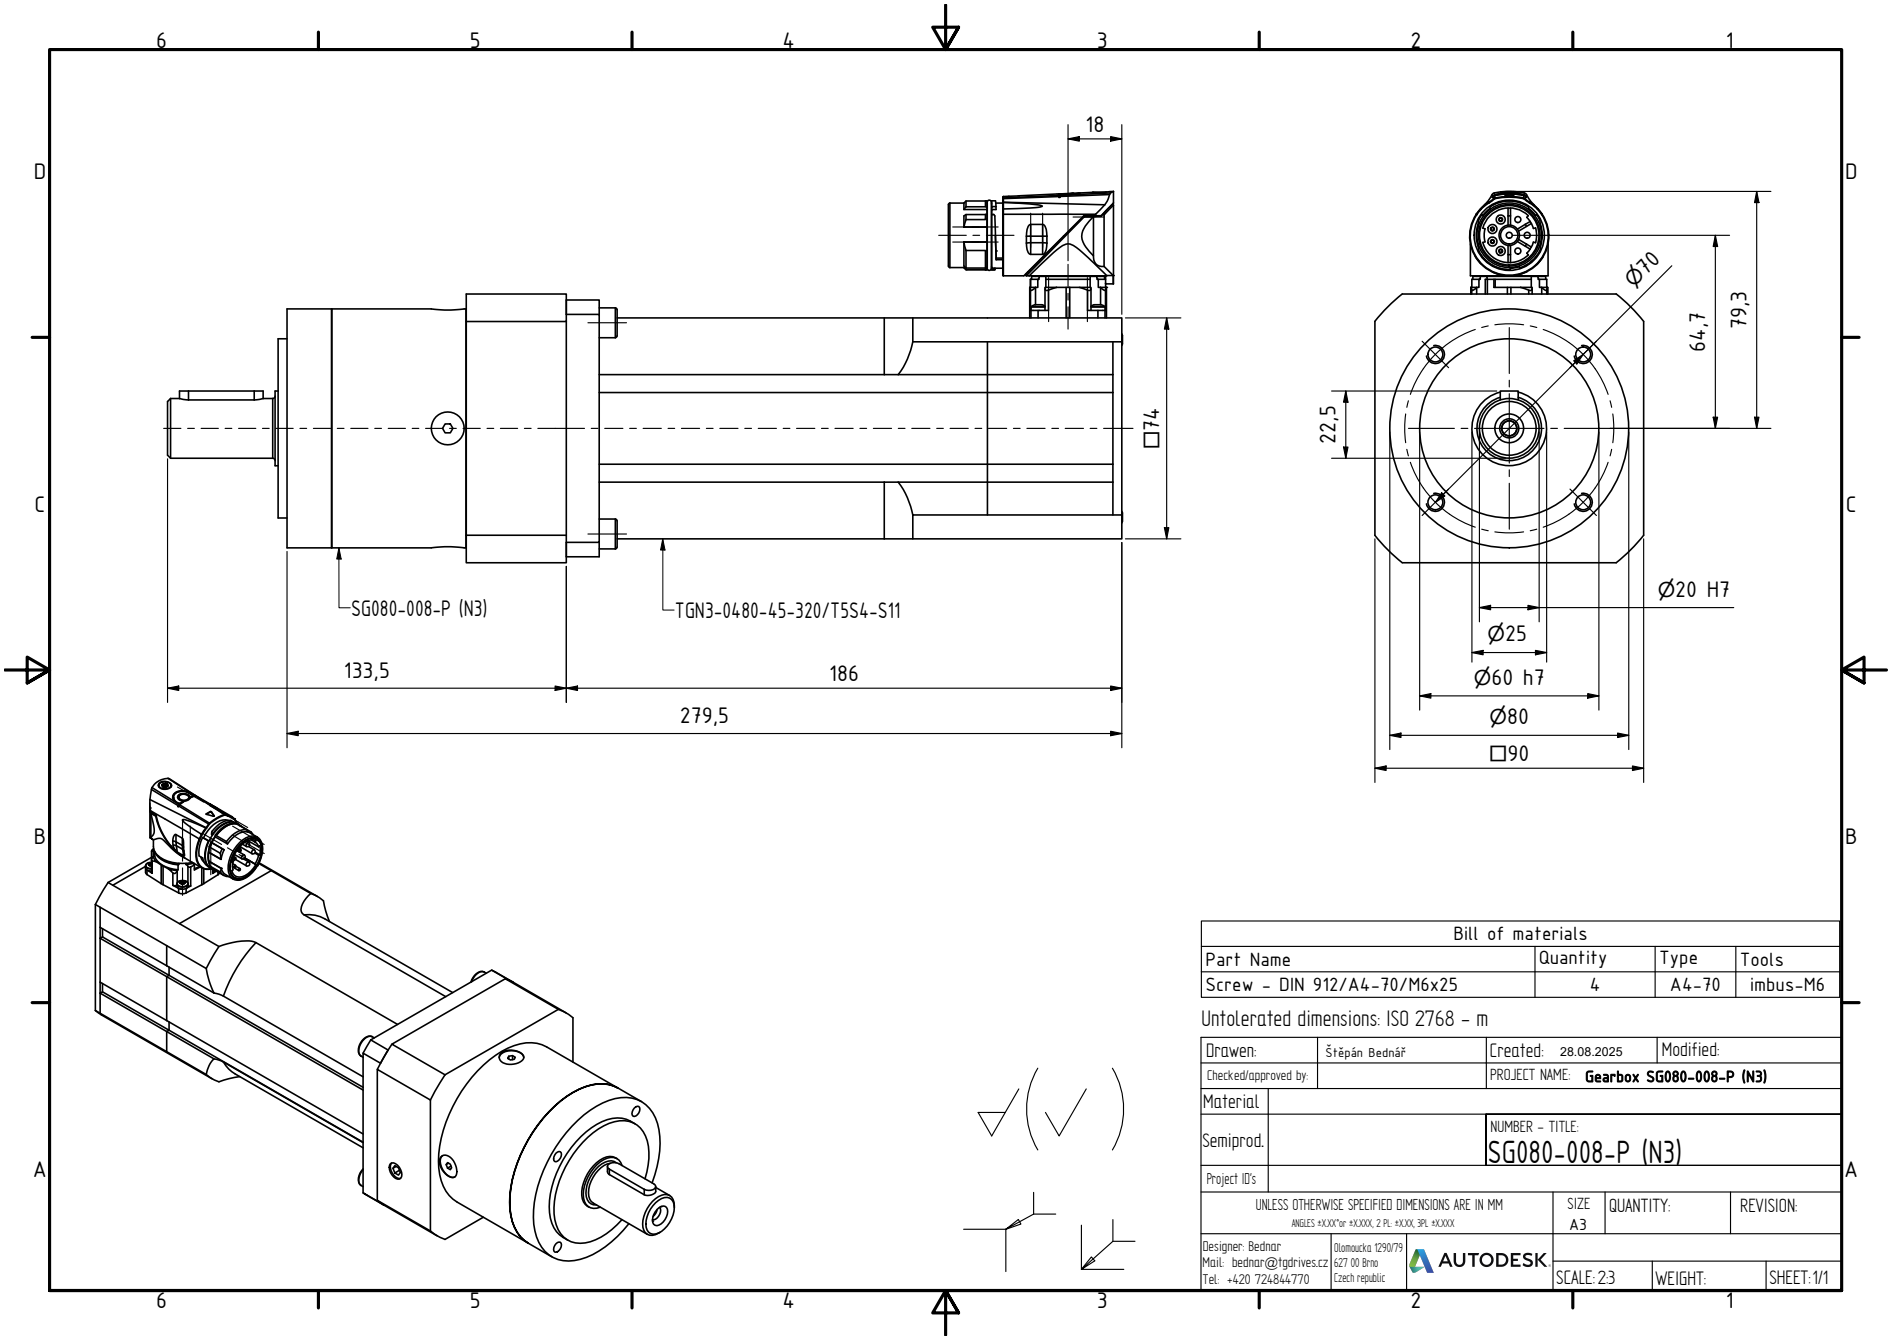

Bill of materials			
Part Name	Quantity	Type	Tools
Screw - DIN 912/A4-70/M6x25	4	A4-70	imbus-M6

Untolerated dimensions: ISO 2768 - m

Drawen:	Štěpán Bednář	Created: 28.08.2025	Modified:
Checked/approved by:		PROJECT NAME: **Gearbox SG080-008-P (N3)**	
Material			
Semiprod.		NUMBER - TITLE: SG080-008-P (N3)	
Project ID's			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM
ANGLES ±XXX° or ±XXXX, 2 PL ±XXX, 3PL ±XXXX


SIZE A3 | QUANTITY: | REVISION:

Designer: Bednar
Mail: bednar@tgdrives.cz
Tel: +420 724844770

Olomoucka 1290/79
627 00 Brno
Czech republic

AUTODESK

SCALE: 2:3 | WEIGHT: | SHEET: 1/1

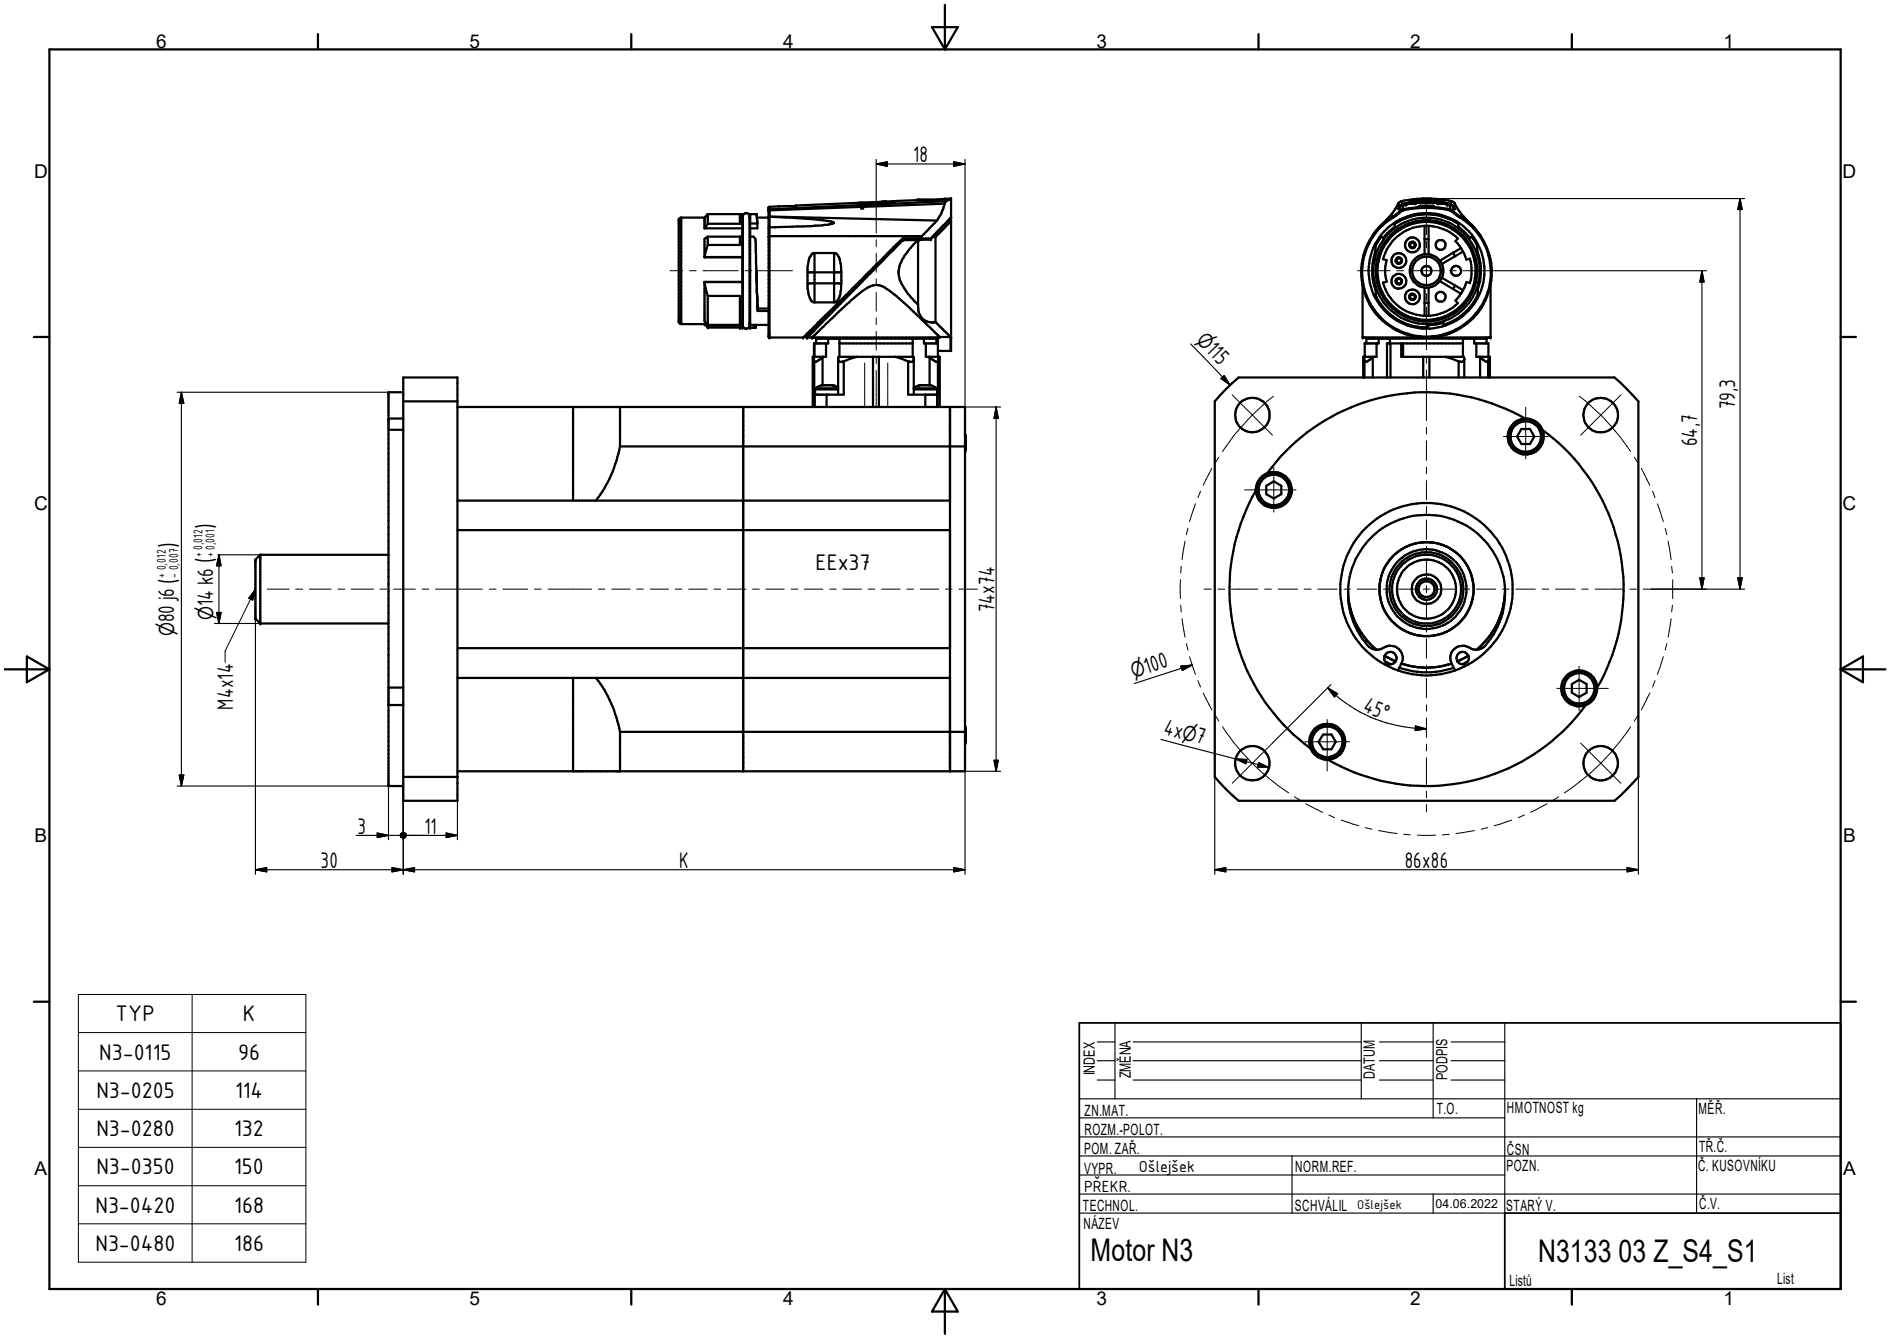


TYP	K
N3-0115	96
N3-0205	114
N3-0280	132
N3-0350	150
N3-0420	168
N3-0480	186

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR. Ošlejšek		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.		SCHVÁLIL Ošlejšek	04.06.2022	STARÝ V.	Č.V.

NÁZEV
Motor N3

N3133 03 Z_S4_S1

Listů List

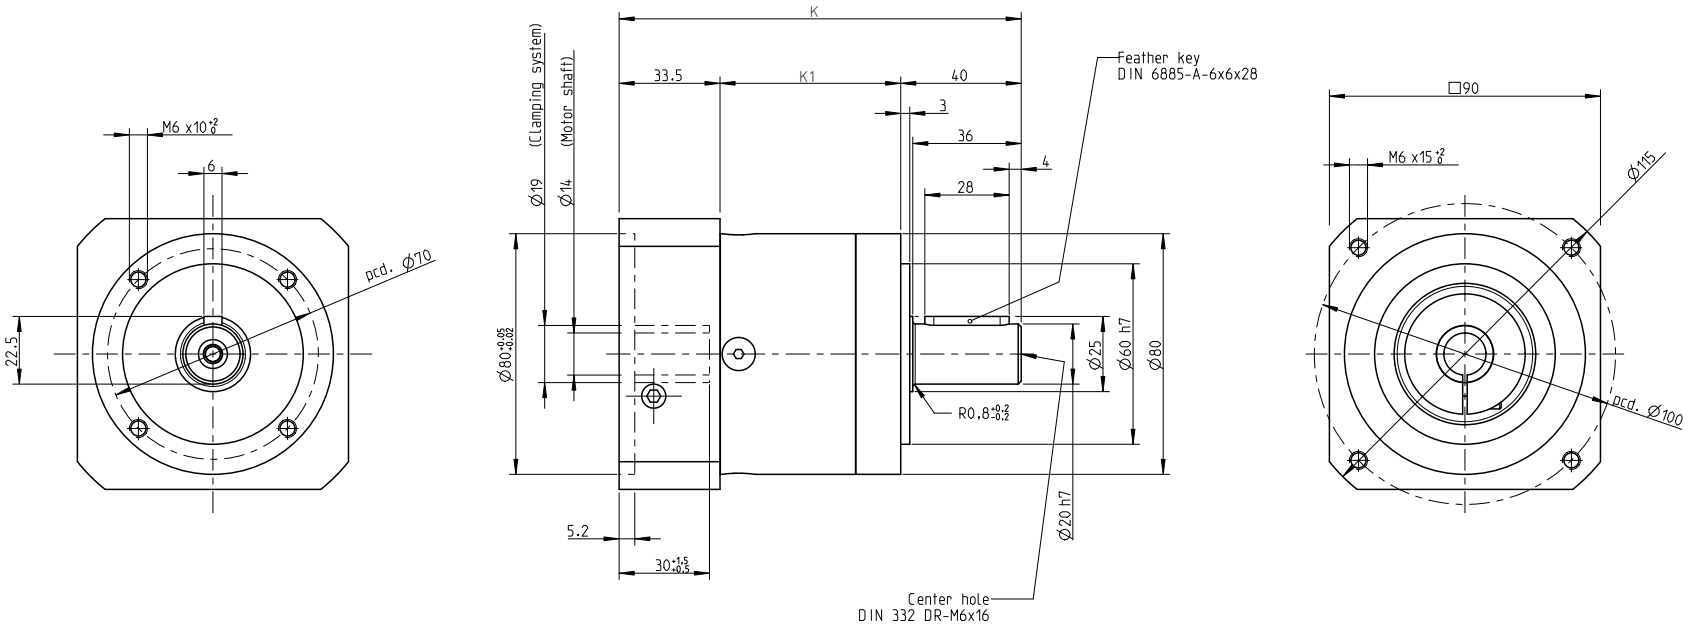

NO OF STAGES	K	K1
I. stage	133,5	60
II. stage	151	77,5
III. stage	168,5	95

INDEX	ZMĚNA	DATUM	PODPIS		
ZM.MAT.		T.O.	HMOTNOST kg	MĚŘ.	
ROZM.-POLOT.					
ROZM. ZAŘ.			ČSN	TŘ.Č.	
VYPR.	NORM. REF.		POZN.	Č. KUSOVNÍKU	
PŘEKR.					
TECHNOL.	SCHVÁLIL.	12.9.2020	STARÝ V.	Č.V.	
NÁZEV					
Gearbox SG080			TGN3, TGH3, TGT3		
			Listů	List	